

DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55



Typ	Nenn- leistung	Nenn- drehzahl	N-strom 4.16kV	Leistungs- faktor	Wirkungs- grad	Anzugs- moment	Anzugs- strom	Kipp- moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos Φ	%	MA / MN	Ia / In	MK / MN	kg

2 Polig / 2 Poles / 2 Pôles

HJS355A-2	220	3568	42.8	0.85	92.5	0.6	7.0	1.8	2250
HJS355B-2	250	3566	48.5	0.85	92.6	0.6	7.0	1.8	2300
HJS355C-2	280	3568	54.3	0.85	92.8	0.6	7.0	1.8	2350
HJS355D-2	315	3570	60.8	0.85	93.1	0.6	7.0	1.8	2400
HJS400B-2	355	3572	67.6	0.86	93.4	0.6	7.0	1.8	2700
HJS400C-2	400	3571	75.9	0.86	93.7	0.6	7.0	1.8	2780
HJS400D-2	450	3570	85.1	0.86	94.0	0.6	7.0	1.8	2900
HJS400E-2	500	3571	94.3	0.86	94.2	0.6	7.0	1.8	2950
HJS450B-2	560	3576	105.4	0.86	94.4	0.6	7.0	1.8	4000
HJS450C-2	630	3576	117.0	0.87	94.6	0.6	7.0	1.8	4300
HJS450D-2	710	3577	131.7	0.87	94.7	0.6	7.0	1.8	4600
HJS450E-2	800	3580	148.3	0.87	94.8	0.6	7.0	1.8	4900
HJS500A-2	900	3577	166.4	0.87	95.0	0.6	7.0	1.8	5200
HJS500B-2	1000	3580	184.7	0.87	95.1	0.6	7.0	1.8	5440
HJS500C-2	1120	3578	206.7	0.87	95.2	0.6	7.0	1.8	5650
HJS500D-2	1250	3576	230.4	0.87	95.3	0.6	7.0	1.8	5880
HJS560A-2	1400	3576	254.9	0.88	95.4	0.6	7.0	1.8	6800
HJS560B-2	1600	3575	291.0	0.88	95.5	0.6	7.0	1.8	6900
HJS560C-2	1800	3578	327.0	0.88	95.6	0.6	7.0	1.8	7160
HJS630A-2	2000	3578	363.0	0.88	95.7	0.6	7.0	1.8	9450
HJS630B-2	2240	3578	406.1	0.88	95.8	0.6	7.0	1.8	9850
HJS630C-2	2500	3578	452.8	0.88	95.9	0.6	7.0	1.8	10250
HJS710A-2	2800	3579	500.9	0.89	96.0	0.6	7.0	1.8	15250
HJS710B-2	3150	3589	562.9	0.89	96.1	0.6	7.0	1.8	15800
HJS710C-2	3550	3591	633.7	0.89	96.2	0.6	7.0	1.8	16200
HJS710D-2	4000	3593	713.3	0.89	96.3	0.6	7.0	1.8	16850
HJS800A-2	4500	3595	801.7	0.89	96.4	0.6	7.0	1.8	22300
HJS800B-2	5000	3595	889.8	0.89	96.5	0.6	7.0	1.8	23500
HJS800C-2	5600	3595	995.6	0.89	96.6	0.6	7.0	1.8	25100



DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55



Typ	Nenn- leistung	Nenn- drehzahl	N-strom 4.16kV	Leistungs- faktor	Wirkungs- grad	Anzugs- moment	Anzugs- strom	Kipp- moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos Φ	%	MA / MN	Ia / In	MK / MN	kg

4 Polig / 4 Poles / 4 Pôles

HJS355A-4	185	1780	35.8	0.85	92.8	0.7	6.5	1.8	2500
HJS355B-4	200	1780	38.7	0.85	92.9	0.7	6.5	1.8	2550
HJS355C-4	220	1780	42.5	0.85	93.0	0.7	6.5	1.8	2600
HJS355D-4	250	1778	48.3	0.85	93.1	0.7	6.5	1.8	2650
HJS400B-4	280	1778	53.4	0.86	93.2	0.7	6.5	1.8	2640
HJS400C-4	315	1780	60.0	0.86	93.3	0.7	6.5	1.8	2800
HJS400D-4	355	1780	67.5	0.86	93.5	0.7	6.5	1.8	2870
HJS400E-4	400	1778	75.9	0.86	93.7	0.7	6.5	1.8	2990
HJS400F-4	450	1780	85.2	0.86	93.9	0.7	6.5	1.8	3060
HJS450B-4	500	1782	94.5	0.86	94.0	0.7	6.5	1.8	4400
HJS450C-4	560	1782	105.7	0.86	94.2	0.6	6.5	1.8	4560
HJS450D-4	630	1781	118.6	0.86	94.4	0.7	6.5	1.8	4720
HJS450E-4	710	1781	133.4	0.86	94.6	0.7	6.5	1.8	4890
HJS500A-4	800	1783	148.3	0.87	94.8	0.7	6.5	1.8	5640
HJS500B-4	900	1783	166.6	0.87	94.9	0.7	6.5	1.8	5660
HJS500C-4	1000	1783	184.9	0.87	95.0	0.7	6.5	1.8	5850
HJS500D-4	1120	1783	206.9	0.87	95.1	0.6	6.5	1.8	6030
HJS560A-4	1250	1786	228.1	0.88	95.2	0.6	6.5	1.8	7800
HJS560B-4	1400	1784	255.2	0.88	95.3	0.6	6.5	1.8	8050
HJS560C-4	1600	1786	291.3	0.88	95.4	0.6	6.5	1.8	8300
HJS630A-4	1800	1787	327.4	0.88	95.5	0.6	6.5	1.8	10400
HJS630B-4	2000	1786	363.4	0.88	95.6	0.6	6.5	1.8	10800
HJS630C-4	2240	1786	406.5	0.88	95.7	0.6	6.5	1.8	11200
HJS710A-4	2500	1789	462.4	0.86	96.1	0.5	6.5	1.8	14350
HJS710B-4	2800	1791	517.3	0.86	96.2	0.5	6.5	1.8	15850
HJS710C-4	3150	1793	574.7	0.87	96.3	0.5	6.5	1.8	16250
HJS710D-4	3550	1794	647.6	0.87	96.3	0.5	6.5	1.8	16850
HJS800A-4	4000	1795	729.0	0.87	96.4	0.5	6.5	1.8	21000
HJS800B-4	4500	1795	820.1	0.87	96.4	0.5	6.5	1.8	23000
HJS800C-4	5000	1795	899.9	0.88	96.5	0.5	6.5	1.8	24000



DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55



Typ	Nennleistung	Nenn-drehzahl	N-strom 4.16kV	Leistungs-faktor	Wirkungs-grad	Anzugs-moment	Anzugs-strom	Kipp-moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos Φ	%	MA / MN	Ia / In	MK / MN	kg

6 Polig / 6 Pole

HJS400A-6	185	1186	37.3	0.82	92.4	0.7	6.0	1.8	2610
HJS400B-6	200	1186	40.3	0.82	92.6	0.7	6.0	1.8	2665
HJS400C-6	220	1186	44.2	0.82	92.8	0.7	6.0	1.8	2700
HJS400D-6	250	1186	50.1	0.82	93.0	0.7	6.0	1.8	2750
HJS400E-6	280	1186	55.9	0.82	93.3	0.7	6.0	1.8	2895
HJS400F-6	315	1186	62.8	0.82	93.5	0.7	6.0	1.8	3020
HJS450B-6	355	1186	69.8	0.83	93.7	0.7	6.0	1.8	4380
HJS450C-6	400	1184	78.5	0.83	93.8	0.7	6.0	1.8	4540
HJS450D-6	450	1186	88.1	0.83	94.1	0.7	6.0	1.8	4690
HJS450E-6	500	1187	97.6	0.83	94.3	0.7	6.0	1.8	4810
HJS500A-6	560	1188	107.9	0.84	94.4	0.7	6.0	1.8	5355
HJS500B-6	630	1188	121.3	0.84	94.5	0.7	6.0	1.8	5440
HJS500C-6	710	1188	136.3	0.84	94.8	0.7	6.0	1.8	5700
HJS500D-6	800	1188	153.4	0.84	94.9	0.7	6.0	1.8	5880
HJS560A-6	900	1189	170.4	0.85	95.0	6.5	6.0	1.8	7500
HJS560B-6	1000	1189	189.1	0.85	95.1	6.5	6.0	1.8	7850
HJS560C-6	1120	1188	211.6	0.85	95.2	6.5	6.0	1.8	8100
HJS630A-6	1250	1189	233.1	0.86	95.3	6.5	6.0	1.8	10750
HJS630B-6	1400	1189	373.8	0.86	95.4	6.5	6.0	1.8	11150
HJS630C-6	1600	1189	297.8	0.86	95.5	6.5	6.0	1.8	11500
HJS710A-6	1800	1190	337.9	0.85	95.8	0.5	6.5	1.8	14450
HJS710B-6	2000	1190	375.0	0.85	95.9	0.5	6.5	1.8	14650
HJS710C-6	2240	1190	419.6	0.85	96.0	0.5	6.5	1.8	14900
HJS710D-6	2500	1190	467.8	0.85	96.1	0.5	6.5	1.8	15150
HJS800A-6	2800	1192	517.8	0.86	96.1	0.5	6.5	1.8	20000
HJS800B-6	3150	1192	582.0	0.86	96.2	0.5	6.5	1.8	21000
HJS800C-6	3550	1192	655.9	0.86	96.2	0.5	6.5	1.8	23000
HJS800D-6	4000	1192	738.2	0.86	96.3	0.5	6.5	1.8	24000
HJS900A-6	4500	1192	820.1	0.87	96.4	0.6	6.5	1.8	31500
HJS900B-6	5000	1193	910.3	0.87	96.5	0.6	6.5	1.8	32000
HJS900C-6	5600	1193	1018	0.87	96.6	0.6	6.5	1.8	32500
HJS1000A-6	6300	1193	1132	0.88	96.7	0.6	6.5	1.8	35000
HJS1000B-6	7100	1193	1274	0.88	96.8	0.6	6.5	1.8	38000



DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55



Typ	Nennleistung	Nenn-drehzahl	N-strom 4.16kV	Leistungs- faktor	Wirkungs- grad	Anzugs- moment	Anzugs- strom	Kipp- moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos Φ	%	MA / MN	Ia / In	MK / MN	kg

8 Polig / 8 Poles / 8 Pôles

HJS400D-8	185	888	39.2	0.78	92.5	0.8	5.5	1.8	2785
HJS400E-8	200	888	42.3	0.78	92.7	0.8	5.5	1.8	2840
HJS400F-8	220	888	46.4	0.78	92.9	0.8	5.5	1.8	2910
HJS450B-8	250	889	52.0	0.79	93.0	0.8	5.5	1.8	4560
HJS450C-8	280	889	58.1	0.79	93.2	0.8	5.5	1.8	4650
HJS450D-8	315	890	65.3	0.79	93.4	0.8	5.5	1.8	4740
HJS450E-8	355	892	73.5	0.79	93.5	0.8	5.5	1.8	4840
HJS500A-8	400	892	81.6	0.80	93.7	0.8	5.5	1.8	5110
HJS500B-8	450	892	91.7	0.80	93.8	0.8	5.5	1.8	5280
HJS500C-8	500	892	101.4	0.80	94.2	0.8	5.5	1.8	5430
HJS500D-8	560	892	113.3	0.80	94.4	0.8	5.5	1.8	5660
HJS560A-8	630	892	124.3	0.82	94.5	0.7	6.0	1.8	7500
HJS560B-8	710	892	139.9	0.82	94.6	0.7	6.0	1.8	7750
HJS560C-8	800	892	157.5	0.82	94.7	0.7	6.0	1.8	8000
HJS630A-8	900	893	172.7	0.84	94.8	0.7	6.0	1.8	10400
HJS630B-8	1000	893	191.7	0.84	94.9	0.7	6.0	1.8	10800
HJS630C-8	1120	893	214.5	0.84	95.0	0.7	6.0	1.8	11200
HJS630D-8	1250	893	239.2	0.84	95.1	0.7	6.0	1.8	11600
HJS710A-8	1400	894	267.6	0.84	95.2	0.6	6.5	1.8	14450
HJS710B-8	1600	894	305.5	0.84	95.3	0.6	6.5	1.8	14650
HJS710C-8	1800	894	343.3	0.84	95.4	0.6	6.5	1.8	14900
HJS800A-8	2000	894	376.6	0.85	95.5	0.6	6.5	1.8	18800
HJS800B-8	2240	894	421.3	0.85	95.6	0.6	6.5	1.8	19200
HJS800C-8	2500	894	469.7	0.85	95.7	0.6	6.5	1.8	19800
HJS800D-8	2800	894	525.6	0.85	95.8	0.6	6.5	1.8	20800
HJS900A-8	3150	895	583.8	0.86	95.9	0.6	6.5	1.8	23800
HJS900B-8	3550	895	657.2	0.86	96.0	0.6	6.5	1.8	26550
HJS900C-8	4000	895	739.8	0.86	96.1	0.6	6.5	1.8	27850
HJS1000A-8	4500	895	821.8	0.87	96.2	0.6	6.5	1.8	29250
HJS1000B-8	5000	895	912.2	0.87	96.3	0.6	6.5	1.8	30300
HJS1000C-8	5600	895	1021	0.87	96.4	0.6	6.5	1.8	31350



DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55



Typ	Nennleistung	Nenn-drehzahl	N-strom 4.16kV	Leistungs-faktor	Wirkungs-grad	Anzugs-moment	Anzugs-strom	Kipp-moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos φ	%	MA / MN	Ia / In	MK / MN	kg

10 Polig / 10 Poles / 10 Pôles

HJS450A-10	185	713	41.1	0.75	91.7	0.8	5.5	1.8	4580
HJS450B-10	200	713	44.4	0.75	91.9	0.8	5.5	1.8	4670
HJS450C-10	220	713	48.7	0.75	92.1	0.8	5.5	1.8	4760
HJS450D-10	250	712	55.2	0.75	92.3	0.8	5.5	1.8	4860
HJS450E-10	280	713	61.7	0.75	92.5	0.8	5.5	1.8	4960
HJS500A-10	315	712	68.3	0.76	92.8	0.8	5.5	1.8	5220
HJS500B-10	355	712	76.8	0.76	93.0	0.8	5.5	1.8	5375
HJS500C-10	400	712	86.2	0.76	93.3	0.8	5.5	1.8	5535
HJS500D-10	450	712	96.9	0.76	93.4	0.8	5.5	1.8	5760
HJS560A-10	500	712	104.7	0.78	93.6	0.7	6.0	1.8	7470
HJS560B-10	560	713	117.1	0.78	93.7	0.7	6.0	1.8	7690
HJS560C-10	630	712	131.6	0.78	93.8	0.7	6.0	1.8	7920
HJS560D-10	710	713	148.0	0.78	94.0	0.7	6.0	1.8	8140
HJS630A-10	800	713	162.3	0.80	94.2	0.7	6.0	1.8	10600
HJS630B-10	900	713	182.3	0.80	94.3	0.7	6.0	1.8	11000
HJS630C-10	1000	713	202.4	0.80	94.4	0.7	6.0	1.8	11400
HJS630D-10	1120	713	226.2	0.80	94.6	0.7	6.0	1.8	11800
HJS710A-10	1250	714	242.8	0.83	94.8	0.6	6.5	1.8	14450
HJS710B-10	1400	714	271.7	0.83	94.9	0.6	6.5	1.8	14650
HJS710C-10	1600	714	310.1	0.83	95.0	0.6	6.0	1.8	14900
HJS800A-10	1800	714	348.6	0.83	95.1	0.6	6.0	1.8	18800
HJS800B-10	2000	714	386.9	0.83	95.2	0.6	6.0	1.8	19200
HJS800C-10	2240	714	432.8	0.83	95.3	0.6	6.0	1.8	19800
HJS900A-10	2500	715	476.8	0.84	95.4	0.6	6.0	1.8	25150
HJS900B-10	2800	715	533.5	0.84	95.5	0.6	6.0	1.8	25800
HJS900C-10	3150	715	599.6	0.84	95.6	0.6	6.0	1.8	26550
HJS1000A-10	3550	715	667.0	0.85	95.7	0.6	6.0	1.8	27850
HJS1000B-10	4000	715	750.8	0.85	95.8	0.6	6.0	1.8	27250
HJS1000C-10	4500	715	843.8	0.85	95.9	0.6	6.0	1.8	28300



DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55



Typ	Nenn- leistung	Nenn- drehzahl	N-strom 4.16kV	Leistungs- faktor	Wirkungs- grad	Anzugs- moment	Anzugs- strom	Kipp- moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos Φ	%	MA / MN	Ia / In	MK / MN	kg

12 Polig / 12 Poles / 12 Pôles

HJS450D-12	185	593	44.0	0.70	91.8	0.8	5.5	1.8	4770
HJS450E-12	200	593	47.5	0.70	92.0	0.8	5.5	1.8	4950
HJS500A-12	220	593	50.7	0.72	92.2	0.8	5.5	1.8	5090
HJS500B-12	250	593	57.4	0.72	92.5	0.8	5.5	1.8	5340
HJS500C-12	280	593	64.1	0.72	92.7	0.8	5.5	1.8	5410
HJS500D-12	315	593	72.1	0.72	92.8	0.8	5.5	1.8	5660
HJS560A-12	355	594	78.8	0.74	93.0	0.7	6.0	1.8	7440
HJS560B-12	400	594	88.6	0.74	93.3	0.7	6.0	1.8	7650
HJS560C-12	450	594	99.5	0.74	93.4	0.7	6.0	1.8	7860
HJS560D-12	500	594	110.2	0.74	93.7	0.7	6.0	1.8	8070
HJS630A-12	560	594	120.1	0.76	93.8	0.7	6.0	1.8	10600
HJS630B-12	630	594	134.9	0.76	93.9	0.7	6.0	1.8	11000
HJS630C-12	710	594	151.9	0.76	94.0	0.7	6.0	1.8	11400
HJS630D-12	800	594	170.8	0.76	94.2	0.7	6.0	1.8	11800
HJS710A-12	900	595	184.5	0.79	94.4	0.6	6.0	1.8	14450
HJS710B-12	1000	595	205.0	0.79	94.4	0.6	6.0	1.8	14650
HJS710C-12	1120	595	229.3	0.79	94.5	0.6	6.0	1.8	14900
HJS800A-12	1250	595	255.9	0.79	94.5	0.6	6.0	1.8	16900
HJS800B-12	1400	595	286.3	0.79	94.6	0.6	6.0	1.8	17100
HJS800C-12	1600	595	327.2	0.79	94.6	0.6	6.0	1.8	17300
HJS800D-12	1800	595	368.1	0.79	94.6	0.6	6.0	1.8	17650
HJS900A-12	2000	596	403.5	0.80	94.7	0.6	6.0	1.8	18600
HJS900B-12	2240	596	451.4	0.80	94.8	0.6	6.0	1.8	19100
HJS900C-12	2500	596	503.3	0.80	94.9	0.6	6.0	1.8	19400
HJS1000A-12	2800	596	563.1	0.80	95.0	0.6	6.0	1.8	25250
HJS1000B-12	3150	596	632.8	0.80	95.1	0.6	6.0	1.8	26300
HJS1000C-12	3550	596	712.5	0.80	95.2	0.6	6.0	1.8	27350



DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement

4.16kV - 60 Hz - CL F - IP55




Typ	Nennleistung	Nenn-drehzahl	N-strom 4.16kV	Leistungs- faktor	Wirkungs- grad	Anzugs- moment	Anzugs- strom	Kipp- moment	Gewicht
Type	Rated output	Rated speed	Current 4.16kV	Power factor	Efficiency %	Relative torque	Relative current	B-down Torque	Weight
Type	Puissance nominale	Vitesse nominale	Intensité 4.16kV	Facteur de puissance	Rendement %	Couple démarrage	Courant démarrage	Couple maximal	Masse
	KW	1 / min	A	cos Φ	%	MA / MN	Ia / In	MK / MN	kg

16 Polig / 16 Poles / 16 Pôles

HJS710A-16	500	444	112.8	0.73	92.8	0.6	6.0	1.8	14200
HJS710B-16	560	444	126.2	0.73	92.9	0.6	6.0	1.8	14450
HJS710C-16	630	444	141.8	0.73	93.0	0.6	6.0	1.8	14650
HJS710D-16	710	444	159.5	0.73	93.2	0.6	6.0	1.8	14900
HJS800A-16	800	446	179.5	0.73	93.3	0.6	6.0	1.8	16900
HJS800B-16	900	446	202.0	0.73	93.3	0.6	6.0	1.8	17100
HJS800C-16	1000	446	224.4	0.73	93.3	0.6	6.0	1.8	17300
HJS800D-16	1120	446	251.1	0.73	93.4	0.6	6.0	1.8	17650
HJS900A-16	1250	446	276.1	0.74	93.5	0.6	6.0	1.8	19100
HJS900B-16	1400	446	308.5	0.74	93.6	0.6	6.0	1.8	19400
HJS900C-16	1600	446	352.7	0.74	93.7	0.6	6.0	1.8	19700
HJS1000A-16	1800	449	396.4	0.74	93.8	0.6	6.0	1.8	26300
HJS1000B-16	2000	449	439.9	0.74	93.9	0.6	6.0	1.8	27350
HJS1000C-16	2240	449	492.2	0.74	94.0	0.6	6.0	1.8	28200




Overall mounting dimensions for HJS (4.16kV / 6.6kV / 13.8kV) series of high-voltage three-phase induction motors.

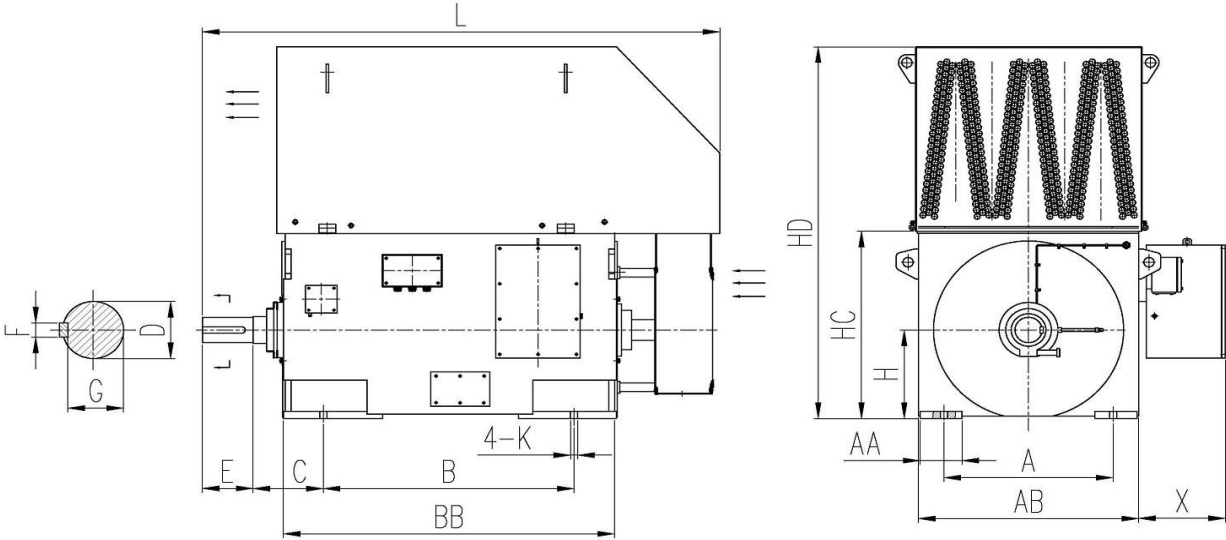

Frame	A	AA	AB	B	BB	C	D	E	F	G	H	HC	HD	K	L	X
HJS355 2	630	160	800	900	1420	315	80	170	22	71	355	755	1250	28	2200	510
HJS355 4-8	630	160	800	900	1420	315	100	210	28	90	355	755	1250	28	2200	510
HJS400 2	710	170	900	1000	1570	335	90	170	25	81	400	850	1350	35	2400	510
HJS400 4-8	710	170	900	1000	1570	335	110	210	28	100	400	850	1350	35	2400	510
HJS450 2	800	190	1000	1120	1720	355	100	210	28	90	450	950	1550	35	2600	510
HJS450 4	800	190	1000	1120	1720	355	120	210	32	109	450	950	1550	35	2600	510
HJS450 6-12	800	190	1000	1120	1720	355	130	250	32	119	450	950	1550	35	2600	510
HJS500 2	900	200	1120	1250	1820	475	110	210	28	100	500	1060	1700	42	2900	510
HJS500 4	900	200	1120	1250	1820	475	130	250	32	119	500	1060	1700	42	2900	510
HJS500 6-12	900	200	1120	1250	1820	475	140	250	36	128	500	1060	1700	42	2900	510
HJS560 2	1000	230	1250	1400	1970	500	130	250	32	119	560	1185	1850	42	3200	560
HJS560 4	1000	230	1250	1400	1970	500	150	250	36	138	560	1185	1850	42	3200	560
HJS560 6-12	1000	230	1250	1400	1970	500	160	300	40	147	560	1185	1850	42	3200	560
HJS630 2	1120	240	1400	1600	2120	530	140	250	36	128	630	1330	2700	48	3500	560
HJS630 4	1120	240	1400	1600	2120	530	170	300	40	157	630	1330	2700	48	3500	560
HJS630 6-12	1120	240	1400	1600	2120	530	180	300	45	165	630	1330	2700	48	3500	560

Overall mounting dimensions for HJS (4.16kV / 6.6kV / 13.8kV) series of high-voltage three-phase induction motors.

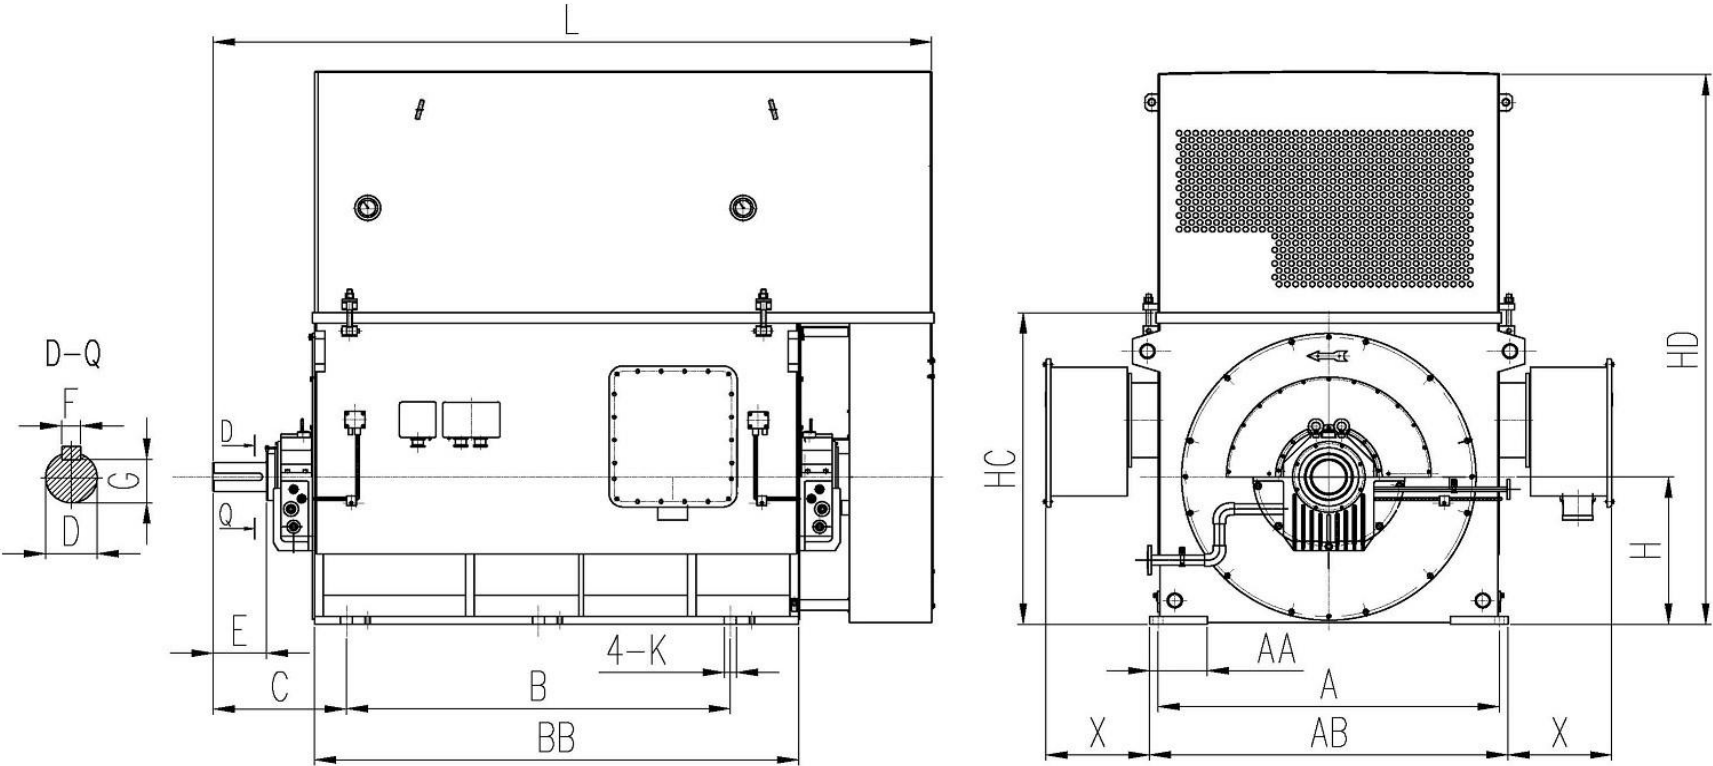

Frame	A	B	C	AB	AA	BB	D	E	F	G	H	K	HC	HD	L	X
HJS710 2-16	1400	1800	530	1600	262	2150/2330	200	350	45	185	710	56	1510	2960	3850	600
HJS800 2-16	1600	2000	560	1800	292	2350/2500	220	350	50	203	800	56	1700	3175	4050	600
HJS900 2-16	1800	2000/2200	560	2000	302	2500/2700	250	410	56	230	900	66	1900	3420	4500	600
HJS1000 2-16	2000	2000/2200	630	2240	332	2500/2900	280	470	63	260	1000	66	2120	3720	4550	600
HJS1120 2-16	2240	2200/2500	630	2500	402	2700/3200	320	470	70	298	1120	74	2370	4190	4800	600