



SCHLEIFRING DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

SLIPRING THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement



13.8 kV - 60 Hz - CL F - IP23

Typ	Nennleistung	N-strom 13.8 kV	Nenn-drehzahl	Wirkungs-grad	Leistungs-faktor	Kipp-moment	Rotor Spannung	Rotor Strom		Gewicht
Type	Rated output	Current 13.8 kV	Rated speed	Efficiency %	Power factor	B-down Torque	Rotor voltage	Rotor current	Jmotor	Weight
Type	Puissance nominale	Intensité 13.8 kV	Vitesse nominale	Rendement %	Facteur de puissance	Couple maximal	Voltage Rotor	Courent Rotor		Masse
	KW	A	r/min	%	cos φ	MK / MN	V	A	kg.m2	kg

4 Polig / 4 Poles / 4 Pôles

HJSR1400A-4	200	11	1778	90.8	0.86	2.6	486	266	11	3700
HJSR1400B-4	220	12	1777	91.1	0.87	2.5	486	293	11	3730
HJSR1400C-4	250	13	1778	91.4	0.86	2.5	527	306	11	3750
HJSR1400D-4	280	15	1780	91.4	0.83	2.4	575	314	11	3780
HJSR1400E-4	315	17	1781	91.9	0.83	2.4	632	319	12	3830
HJSR1400F-4	355	19	1781	92.3	0.83	2.4	703	323	13	3960
HJSR1400G-4	400	22	1780	92.7	0.84	2.4	703	364	13	3990
HJSR1450A-4	450	23	1772	93.6	0.88	2.3	575	500	16	4860
HJSR1450B-4	500	25	1774	93.7	0.88	2.4	632	503	17	5030
HJSR1450C-4	560	28	1776	93.9	0.88	2.5	703	504	19	5200
HJSR1450D-4	630	32	1776	94.0	0.88	2.4	768	510	20	5400
HJSR1500A-4	710	36	1777	94.3	0.88	2.5	632	639	29	6300
HJSR1500B-4	800	40	1775	94.6	0.89	2.6	790	575	33	6400
HJSR1500C-4	900	45	1776	94.7	0.89	2.7	843	605	35	6560
HJSR1500D-4	1000	50	1777	94.8	0.89	2.7	973	585	42	6720
HJSR1560A-4	1120	56	1783	94.8	0.89	2.8	973	725	60	8000
HJSR1560B-4	1250	63	1783	94.9	0.87	2.7	1054	744	70	8260
HJSR1560C-4	1400	70	1784	95.0	0.88	2.8	1150	763	70	8510
HJSR1560D-4	1600	80	1784	95.1	0.88	2.9	1265	789	74	8740
HJSR1630A-4	1800	89	1783	95.2	0.89	2.5	1437	759	100	10650
HJSR1630B-4	2000	99	1783	95.3	0.89	2.5	1536	788	109	11100
HJSR1630C-4	2240	110	1784	95.5	0.89	2.5	1775	761	125	11750
HJSR1630D-4	2500	123	1786	95.6	0.89	2.5	1922	783	134	12250
HJSR1630E-4	2800	138	1786	95.7	0.89	2.5	2103	801	150	13000
HJSR1710A-4	2800	137	1789	96.0	0.90	2.6	/	/	223	14160
HJSR1710B-4	3150	153	1789	96.3	0.90	2.6	/	/	257	14730
HJSR1710C-4	3550	172	1789	96.3	0.90	2.6	/	/	287	15550
HJSR1800A-4	4000	193	1790	96.5	0.90	2.6	/	/	318	18600
HJSR1800B-4	4500	216	1790	96.7	0.90	2.7	/	/	402	19370
HJSR1800C-4	5000	240	1792	96.9	0.90	2.9	/	/	506	20150
HJSR1900A-4	5600	267	1792	96.8	0.91	3.0	/	/	553	25200
HJSR1900B-4	6300	298	1792	97.0	0.91	3.0	/	/	598	25930
HJSR1900C-4	7100	335	1790	97.1	0.91	2.9	/	/	684	26510





SCHLEIFRING DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

SLIPRING THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement



13.8 kV - 60 Hz - CL F - IP23

Typ	Nennleistung	N-strom 13.8 kV	Nenn-drehzahl	Wirkungs-grad	Leistungs-faktor	Kipp-moment	Rotor Spannung	Rotor Strom		Gewicht
Type	Rated output	Current 13.8 kV	Rated speed	Efficiency %	Power factor	B-down Torque	Rotor voltage	Rotor current	Jmotor	Weight
Type	Puissance nominale	Intensité 13.8 kV	Vitesse nominale	Rendement %	Facteur de puissance	Couple maximal	Voltage Rotor	Courent Rotor		Masse
	KW	A	r/min	%	cos φ	MK / MN	V	A	kg.m2	kg
6 Polig / 6 Pole / 6 Pôles										
HJSR1400A-6	200	12	1180	90.6	0.80	2.8	466	284	13	3780
HJSR1400B-6	220	12	1180	91.3	0.81	2.6	502	288	16	4040
HJSR1400C-6	250	14	1180	91.5	0.82	2.7	544	302	16	4180
HJSR1450A-6	280	15	1181	92.1	0.85	3.0	544	331	26	4800
HJSR1450B-6	315	17	1178	92.2	0.86	2.6	544	375	26	5010
HJSR1450C-6	355	19	1177	92.3	0.86	2.4	593	387	31	5040
HJSR1450D-6	400	21	1178	92.5	0.86	2.5	652	395	33	5350
HJSR1450E-6	450	24	1180	92.7	0.86	2.6	725	398	36	5520
HJSR1450F-6	500	26	1180	92.8	0.86	2.5	697	449	37	5690
HJSR1500A-6	560	29	1182	94.1	0.85	2.3	652	555	45	6100
HJSR1500B-6	630	33	1183	94.3	0.84	2.4	725	559	49	6300
HJSR1500C-6	710	37	1184	94.7	0.85	2.4	816	558	56	6550
HJSR1500D-6	800	42	1181	94.8	0.85	2.5	932	550	58	6750
HJSR1560A-6	900	46	1180	94.5	0.87	2.3	932	619	94	7650
HJSR1560B-6	1000	51	1182	94.4	0.87	2.4	1088	585	108	8050
HJSR1560C-6	1120	57	1184	94.8	0.87	2.2	1243	570	125	8420
HJSR1560D-6	1250	63	1183	95.0	0.87	2.6	1305	605	132	8600
HJSR1630A-6	1400	71	1187	95.2	0.87	2.4	1148	746	163	10700
HJSR1630B-6	1600	81	1188	95.3	0.87	2.4	1261	774	174	11000
HJSR1630C-6	1800	91	1188	95.4	0.87	2.5	1404	782	198	11650
HJSR1630D-6	2000	101	1188	95.6	0.87	2.5	1580	769	221	12300
HJSR1710A-6	2240	116	1190	96.5	0.84	3.5	/	/	325	13700
HJSR1710B-6	2500	129	1190	96.6	0.84	3.5	/	/	381	14350
HJSR1710C-6	2800	144	1190	96.7	0.84	3.5	/	/	422	15200
HJSR1800A-6	3150	161	1190	96.9	0.85	3.1	/	/	418	18450
HJSR1800B-6	3550	181	1190	97.0	0.85	3.0	/	/	470	19180
HJSR1800C-6	4000	204	1190	96.9	0.85	3.1	/	/	523	19850
HJSR1900A-6	4500	224	1189	96.4	0.87	2.7	/	/	560	23920
HJSR1900B-6	5000	249	1189	96.4	0.87	2.8	/	/	630	24400
HJSR1900C-6	5600	276	1189	96.5	0.88	2.7	/	/	707	25200
HJSR11000A-6	6300	310	1193	97.3	0.88	2.5	/	/	1150	31620
HJSR11000B-6	7100	348	1193	97.3	0.88	2.5	/	/	1293	32530





SCHLEIFRING DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

SLIPRING THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement



13.8 kV - 60 Hz - CL F - IP23

Typ	Nennleistung	N-strom 13.8 kV	Nenn- drehzahl	Wirkungs- grad	Leistungs- faktor	Kipp- moment	Rotor Spannung	Rotor Strom		Gewicht
Type	Rated output	Current 13.8 kV	Rated speed	Efficiency %	Power factor	B-down Torque	Rotor voltage	Rotor current	Jmotor	Weight
Type	Puissance nominale	Intensité 13.8 kV	Vitesse nominale	Rendement %	Facteur de puissance	Couple maximal	Voltage Rotor	Courent Rotor		Masse
	KW	A	r/min	%	cos φ	MK / MN	V	A	kg.m2	kg

8 Polig / 8 Poles / 8 Pôles

HJSR1450A-8	200	11	882	91.7	0.81	2.6	488	267	27	4630
HJSR1450B-8	220	12	882	91.8	0.82	2.5	526	272	29	4800
HJSR1450C-8	250	14	882	92.0	0.83	2.4	570	285	33	4970
HJSR1450D-8	280	15	882	92.2	0.83	2.4	622	292	35	5140
HJSR1450E-8	315	17	883	92.4	0.83	2.5	684	298	37	5310
HJSR1450F-8	355	20	883	92.5	0.81	2.6	760	302	40	5480
HJSR1450G-8	400	22	883	92.6	0.82	2.5	681	367	41	5650
HJSR1500A-8	450	25	887	93.4	0.81	2.1	652	407	51	6110
HJSR1500B-8	500	27	886	93.8	0.82	2.3	725	409	60	6250
HJSR1500C-8	560	30	886	94.1	0.82	2.4	816	402	65	6550
HJSR1500D-8	630	34	887	94.3	0.82	2.4	932	392	74	6850
HJSR1560A-8	710	38	886	94.1	0.83	2.4	933	492	112	7900
HJSR1560B-8	800	43	886	94.2	0.82	2.4	1004	456	120	8150
HJSR1560C-8	900	48	886	94.4	0.83	2.4	1087	473	128	8330
HJSR1560D-8	1000	53	886	95.5	0.83	2.4	1186	489	133	8580
HJSR1630A-8	1120	58	889	94.4	0.85	2.5	1138	602	179	9800
HJSR1630B-8	1250	65	889	94.6	0.85	2.5	1255	609	203	10300
HJSR1630C-8	1400	73	889	94.8	0.85	2.5	1396	612	227	10900
HJSR1630D-8	1600	83	890	95.0	0.85	2.5	1570	621	251	11450
HJSR1710A-8	1600	86	892	95.8	0.82	2.7	/	/	349	13850
HJSR1710B-8	1800	96	892	96.0	0.82	2.7	/	/	381	14380
HJSR1710C-8	2000	106	892	96.1	0.82	2.7	/	/	402	14940
HJSR1800A-8	2240	118	893	96.2	0.83	2.7	/	/	538	18750
HJSR1800B-8	2500	132	893	96.4	0.82	2.7	/	/	610	19280
HJSR1800C-8	2800	148	893	96.4	0.82	2.7	/	/	703	19910
HJSR1900A-8	3150	164	893	96.6	0.83	2.8	/	/	840	24060
HJSR1900B-8	3550	184	893	96.7	0.83	2.8	/	/	929	24820
HJSR1900C-8	4000	208	892	96.9	0.83	2.8	/	/	1123	25470
HJSR11000A-8	4500	231	893	96.9	0.84	2.9	/	/	1268	27940
HJSR11000B-8	5000	256	893	97.0	0.84	2.9	/	/	1373	28870
HJSR11000C-8	5600	286	893	97.0	0.85	2.9	/	/	1479	29740





SCHLEIFRING DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

SLIPRING THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement



13.8 kV - 60 Hz - CL F - IP23

Typ	Nennleistung	N-strom 13.8 kV	Nenn- drehzahl	Wirkungs- grad	Leistungs- faktor	Kipp- moment	Rotor Spannung	Rotor Strom		Gewicht
Type	Rated output	Current 13.8 kV	Rated speed	Efficiency %	Power factor	B-down Torque	Rotor voltage	Rotor current	Jmotor	Weight
Type	Puissance nominale	Intensité 13.8 kV	Vitesse nominale	Rendement %	Facteur de puissance	Couple maximal	Voltage Rotor	Courent Rotor		Masse
	KW	A	r/min	%	cos φ	MK / MN	V	A	kg.m2	kg

10 Polig / 10 Poles / 10 Pôles

HJSR1450A-10	200	13	704	90.1	0.69	2.7	543	248	32	4880
HJSR1450B-10	220	15	704	90.5	0.70	2.7	585	252	35	5050
HJSR1450C-10	250	16	704	90.8	0.71	2.6	633	265	38	5220
HJSR1450D-10	280	18	706	91.1	0.70	2.6	691	272	40	5390
HJSR1450E-10	315	21	706	91.2	0.70	2.5	742	265	41	5600
HJSR1500A-10	355	22	708	92.1	0.74	2.2	633	336	60	6220
HJSR1500B-10	400	25	708	92.3	0.73	2.2	691	347	65	6330
HJSR1500C-10	450	27	709	92.6	0.75	2.1	760	356	70	6560
HJSR1500D-10	500	30	708	92.5	0.75	2.2	844	359	80	6760
HJSR1560A-10	560	33	709	93.4	0.77	2.6	1087	336	126	7850
HJSR1560B-10	630	37	710	93.6	0.77	2.6	1186	347	130	8040
HJSR1560C-10	710	41	710	93.8	0.78	2.5	1305	354	138	8510
HJSR1560D-10	800	45	709	93.9	0.79	2.5	1450	357	155	8720
HJSR1630A-10	900	48	708	94.5	0.83	2.4	1241	439	211	9800
HJSR1630B-10	1000	53	709	94.7	0.83	2.4	1382	437	237	10250
HJSR1630C-10	1120	60	709	94.9	0.83	2.4	1554	434	263	10800
HJSR1630D-10	1250	66	710	95.1	0.83	2.4	1781	422	303	11550
HJSR1630E-10	1400	74	710	95.2	0.83	2.5	2082	403	356	12100
HJSR1710A-10	1400	75	710	95.0	0.83	2.7	/	/	441	13720
HJSR1710B-10	1600	85	712	95.0	0.83	2.6	/	/	481	14250
HJSR1710C-10	1800	96	712	95.1	0.83	2.6	/	/	535	14960
HJSR1800A-10	2000	109	712	95.2	0.81	2.6	/	/	566	18730
HJSR1800B-10	2240	121	713	95.3	0.81	2.6	/	/	613	19310
HJSR1800C-10	2500	135	713	95.3	0.81	2.7	/	/	684	19840
HJSR1900A-10	2800	150	713	95.4	0.82	2.6	/	/	873	23460
HJSR1900B-10	3150	169	713	95.4	0.82	2.6	/	/	984	23980
HJSR1900C-10	3550	191	712	95.5	0.82	2.7	/	/	1026	24500
HJSR11000A-10	4000	211	713	96.2	0.82	2.7	/	/	963	27450
HJSR11000B-10	4500	237	713	96.2	0.83	2.6	/	/	1061	28130
HJSR11000C-10	5000	264	713	96.4	0.82	2.7	/	/	1254	29250





SCHLEIFRING DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

SLIPRING THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement



13.8 kV - 60 Hz - CL F - IP23

Typ	Nennleistung	N-strom 13.8 kV	Nenn- drehzahl	Wirkungs- grad	Leistungs- faktor	Kipp- moment	Rotor Spannung	Rotor Strom		Gewicht
Type	Rated output	Current 13.8 kV	Rated speed	Efficiency %	Power factor	B-down Torque	Rotor voltage	Rotor current	Jmotor	Weight
Type	Puissance nominale	Intensité 13.8 kV	Vitesse nominale	Rendement %	Facteur de puissance	Couple maximal	Voltage Rotor	Courent Rotor		Masse

	KW	A	r/min	%	cos φ	MK / MN	V	A	kg.m2	kg
--	----	---	-------	---	-------	---------	---	---	-------	----

12 Polig / 12 Poles / 12 Pôles

HJSR1500A-12	200	13	587	90.8	0.71	2.5	541	228	55	5970
HJSR1500B-12	220	14	588	91.1	0.72	2.5	585	230	60	6080
HJSR1500C-12	250	16	588	91.4	0.72	2.5	633	233	65	6190
HJSR1500D-12	280	18	588	91.5	0.72	2.5	691	243	70	6290
HJSR1500E-12	315	20	588	91.9	0.72	2.5	760	247	75	6510
HJSR1500F-12	355	22	588	91.8	0.72	2.5	844	250	85	6750
HJSR1560A-12	400	24	587	92.1	0.76	2.3	691	343	124	7950
HJSR1560B-12	450	27	587	92.4	0.76	2.3	760	351	133	8130
HJSR1560C-12	500	30	588	92.7	0.75	2.3	844	354	143	8330
HJSR1560D-12	560	34	589	93.1	0.75	2.4	950	349	171	8530
HJSR1560E-12	630	38	589	93.3	0.75	2.5	1085	340	180	8710
HJSR1630A-12	710	40	588	93.0	0.79	2.5	1238	350	257	10050
HJSR1630B-12	800	46	589	93.2	0.79	2.5	1378	354	287	10500
HJSR1630C-12	900	51	589	93.4	0.79	2.5	1549	353	317	11100
HJSR1630D-12	1000	57	589	93.6	0.79	2.5	1774	342	363	11750
HJSR1710A-12	1000	54	590	95.1	0.82	2.6	/	/	399	13470
HJSR1710B-12	1120	60	590	95.1	0.82	2.6	/	/	448	13980
HJSR1800A-12	1400	75	590	95.3	0.82	2.6	/	/	519	14560
HJSR1800B-12	1600	87	592	95.3	0.81	2.6	/	/	659	18130
HJSR1800C-12	1800	97	592	95.4	0.81	2.7	/	/	717	18870
HJSR1900A-12	2000	108	592	95.3	0.82	2.7	/	/	793	19490
HJSR1900B-12	2240	123	592	95.4	0.80	2.6	/	/	997	23640
HJSR1900C-12	2500	137	593	95.4	0.80	2.6	/	/	1181	24320
HJSR1900D-12	2800	153	593	95.5	0.80	2.5	/	/	1299	25220
HJSR11000A-12	3150	170	593	95.9	0.81	2.6	/	/	1440	26800
HJSR11000B-12	3550	192	593	96.1	0.81	2.6	/	/	1571	27450
HJSR11000C-12	4000	216	593	96.3	0.81	2.6	/	/	1742	28520
HJSR11000D-12	4500	243	593	96.3	0.81	2.5	/	/	1917	29430





SCHLEIFRING DREHSTROM-HOCHSPANNUNGS-MOTOREN

Kühlart: IC611, Luft-Luft-Kühlung

SLIPRING THREE - PHASE HIGH VOLTAGE MOTORS

Cooling Method: IC611, Air-Air

MOTEURS DE HAUTE TENSION DE TROIS PHASE

Méthode de refroidissement IC611, air-air de refroidissement



13.8 kV - 60 Hz - CL F - IP23


Typ	Nennleistung	N-strom 13.8 kV	Nenn- drehzahl	Wirkungs- grad	Leistungs- faktor	Kipp- moment	Rotor Spannung	Rotor Strom	J Motor	Gewicht
Type	Rated output	Current 13.8 kV	Rated speed	Efficiency %	Power factor	B-down Torque	Rotor voltage	Rotor current		Weight
Type	Puissance nominale	Intensité 13.8 kV	Vitesse nominale	Rendement %	Facteur de puissance	Couple maximal	Voltage Rotor	Courent Rotor		Masse
	KW	A	r/min	%	cos φ	MK / MN	V	A	kg.m2	kg

16 Polig / 16 Poles / 16 Pôles

HJSR1710A-16	630	40	439	92.1	0.71	2.6	/	/	429	12900
HJSR1710B-16	710	45	439	92.3	0.71	2.6	/	/	548	13270
HJSR1710C-16	800	51	440	92.4	0.72	2.6	/	/	643	13680
HJSR1710D-16	900	56	440	92.7	0.72	2.6	/	/	730	14360
HJSR1800A-16	1000	61	440	93.3	0.74	2.6	/	/	759	17930
HJSR1800B-16	1120	68	440	93.4	0.74	2.7	/	/	897	18670
HJSR1800C-16	1250	75	442	93.6	0.75	2.7	/	/	1023	19390
HJSR1900A-16	1400	82	442	94.4	0.76	2.6	/	/	1197	23270
HJSR1900B-16	1600	93	443	94.4	0.76	2.6	/	/	1381	23820
HJSR1900C-16	1800	104	443	94.5	0.76	2.5	/	/	1499	24720
HJSR11000A-16	2000	112	444	94.9	0.79	2.6	/	/	1761	26700
HJSR11000B-16	2240	125	444	95.1	0.79	2.6	/	/	1914	27350
HJSR11000C-16	2500	138	444	95.2	0.80	2.6	/	/	2144	28220
HJSR11000D-16	2800	155	444	95.3	0.80	2.6	/	/	2450	29030




Overall mounting dimensions for HJSR (13.8 kV) series of slipring high-voltage three-phase motors.

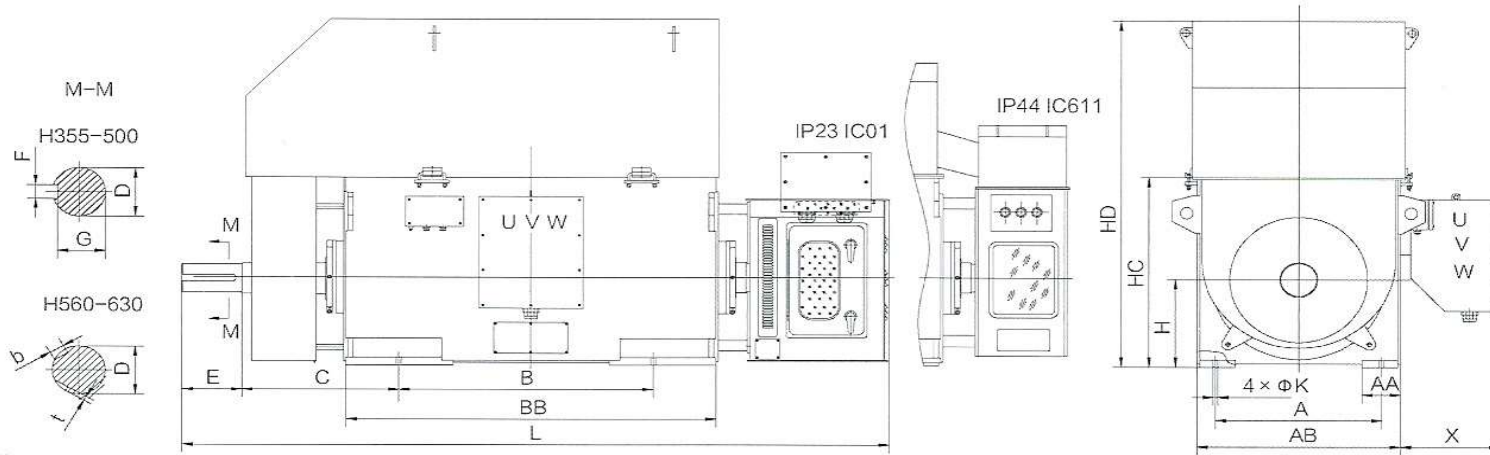

Frame	A	AB	B	AA	BB	C	D	E	F	G	t	b	H	K	HC	HD	L	X
HJSR1355-4	630	800	900	160	1420	560	100	210	28	90	/	/	355	28	755	1600	2750	445
HJSR1400-4-8	710	900	1000	170	1570	630	110	210	28	100	/	/	400	35	850	1850	2940	445
HJSR1450-4	800	1000	1120	190	1720	670	120	210	32	109	/	/	450	35	950	2050	3185	445
HJSR1450-6-12	800	1000	1120	190	1720	670	130	250	32	119	/	/	450	35	950	2050	3185	445
HJSR1500-4	900	1120	1250	200	1820	710	130	250	32	119	/	/	500	42	1060	2260	3355	445
HJSR1500-6-12	900	1120	1250	200	1820	710	140	250	36	128	/	/	500	42	1060	2260	3355	445
HJSR1560-4	1000	1250	1400	230	1970	800	150	250	/	/	11.4	39.7	560	42	1185	2485	3650	510
HJSR1560-6-12	1000	1250	1400	230	1970	800	160	300	/	/	12.4	42.8	560	42	1185	2485	3650	510
HJSR1630-4	1120	1400	1600	240	2120	900	170	300	/	/	12.4	44.2	630	48	1330	2735	3810	510
HJSR1630-6-12	1120	1400	1600	240	2120	900	180	300	/	/	12.4	45.6	630	48	1330	2735	3810	510

Overall mounting dimensions for HJSR (13.8 kV) series of slipring high-voltage three-phase motors.

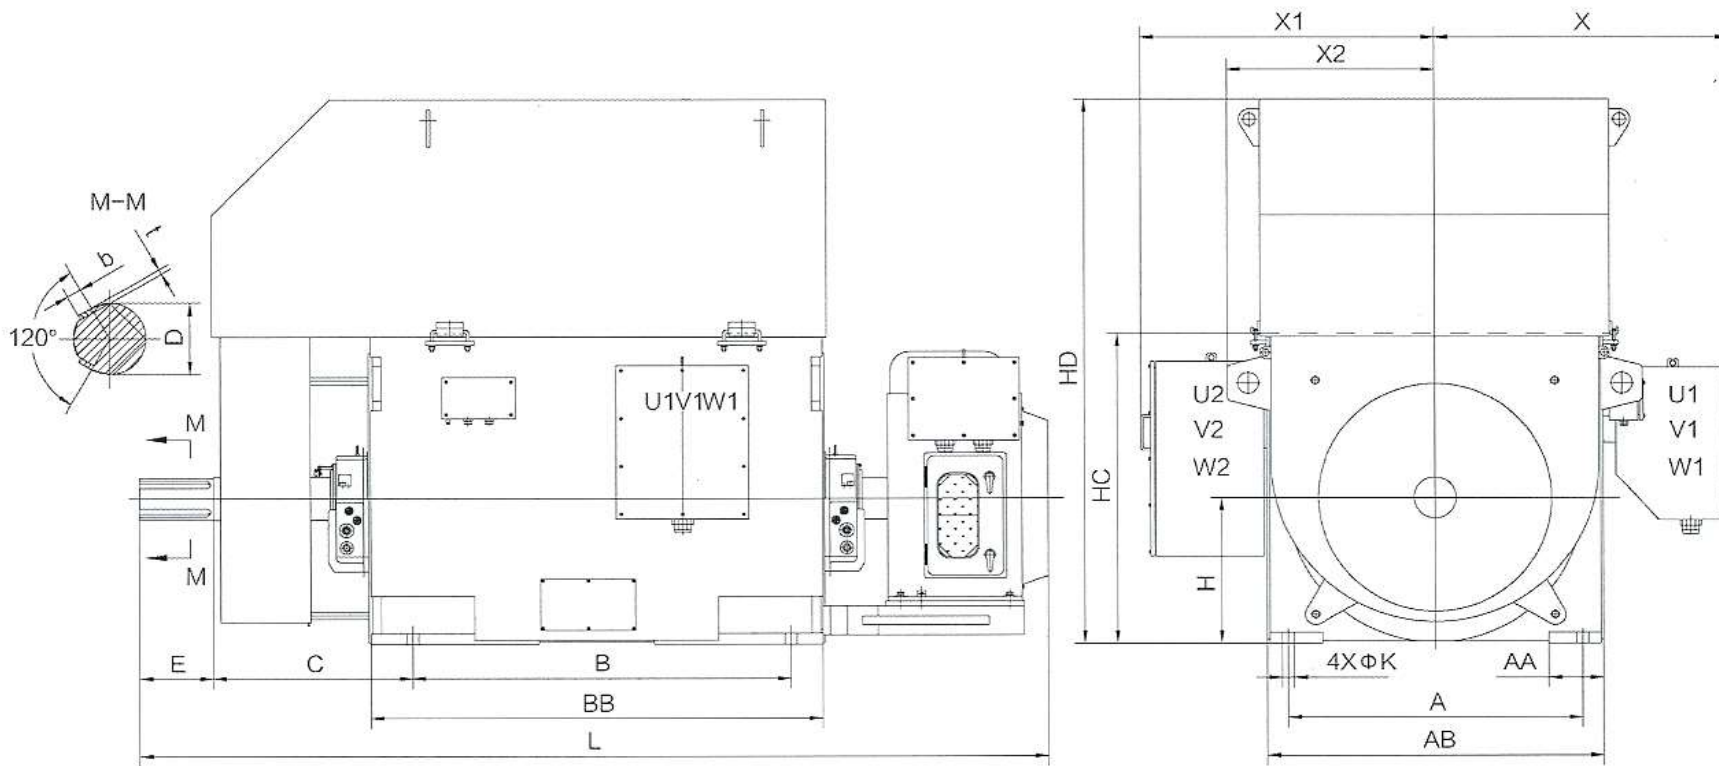

Frame	A	B	C	AB	AA	BB	D	E	b	t	H	K	HC	HD	L	X	X1/X2
HJSR1710-4..16	1400	1800	1000	1600	262	2150/2330	200	350	51	14	710	56	1510	2800	4630	1400	1400/990
HJSR1800-4..16	1600	2000	1080	1800	292	2350/2500	220	350	57.1	16	800	56	1700	3100	4880	1500	1500/1090
HJSR1900-4..16	1800	2000/2200	1200	2000	302	2500/2700	250	410	64.6	18	900	66	1912	3600	5240	1600	1600/1188
HJSR11000-4..16	2000	2000/2200	1400	2240	332	2500/2700	280	470	72.1	20	1000	66	2120	3800	5500	1720	1720/1308

Remark:

The size X2 is for the motor below 2000 kW with one T-box only, X1 is for the one above 2000 kW, with two T-boxes.

The size BB differs depending on the output of the motor.