

CONTENTS

	page	
GENERAL INFORMATION	4	
DESIGNATION, KEY TO SYMBOLS	5	
EFFICIENCY		
MECHANICAL SERVICE FACTOR	6	
LOAD CLASSIFICATION	6 – 7	
THERMAL CAPACITY	8 – 9	
SELECTION PROCEDURES	10	
NOMINAL POWER RATING	PA HELICAL SERIES	12
	PB HELICAL SERIES	12
	PC HELICAL SERIES	13
	PD HELICAL SERIES	13
	RHB/RVB BEVEL-HELICAL SERIES	14
	RHC/RVC BEVEL-HELICAL SERIES	14
	RHD/RVD BEVEL-HELICAL SERIES	15
OUTPUT TORQUES	P SERIES	16
	RH/RV SERIES	17
HELICAL UNITS DIMENSIONAL DATA	PA SERIES	18
	PB SERIES	19 – 20
	PC SERIES	21 – 22
	PD SERIES	23 – 24
BEVEL-HELICAL UNITS DIMENSIONAL DATA	RHB SERIES	25
	RVB SERIES	26
	RHC SERIES	27 – 28
	RVC SERIES	29
	RHD SERIES	30 – 31
	RVD SERIES	32
SHAFT ARRANGEMENTS	33	
MOUNTING POSITIONS	33	
ACTUAL RATIOS	34 – 35	
MOTORIZED GEAR UNITS	37 – 43	
SHAFT ENDING (SOLID AND HOLLOW TYPES)	44 – 46	
INSTALLATION	47	
OUTPUT FLANGES	48	
SHAFT-MOUNTED APPLICATIONS	48	
BACKSTOP DEVICES	49	
OVERHUNG LOADS & MOMENTS OF INERTIA	50 – 54	
WEIGHTS AND LUBRICANT QUANTITIES	55	
LUBRICATION	56	



The new design and outstanding innovations offer :

- increased performance
- more sizes
- more competitiveness with the same high reliability

The high power to weight ratio of all units, combined with low volume, enables perfect installation in the most critical situations.

New concepts have been used to improve the **noise level** in a consistent way, by grinding all gears sets, both the helical and the Gleason spiral bevel type gears.

To obtain **higher performance**, particular consideration has been given to efficiency and housing surface area to guarantee a convenient heat dissipation in most cases. When necessary, units can be supplied with:

- fan(s) fitted to high speed shafts
- cooling water coil
- fan and coil together
- external oil cooling system.

GEAR CASES


Gear cases are of rigid close grained grey cast iron construction up to size 110. Fabricated steel cases are available as standard from size 120 up and as optional for smaller sizes.

GEARS

High quality alloy case hardening materials provide long life, wear resistance and fatigue strength. Helical and spiral bevel gears(usually) are ground to high standards and quiet running characteristics. Life and wear calculations (**25.000 hrs** with $f_m = 1$) based on ISO 6336, DIN 3990 and AGMA 2001 recommendations.

DESIGNATION

P	B	30	UB	16	B	S	2
---	---	----	----	----	---	---	---

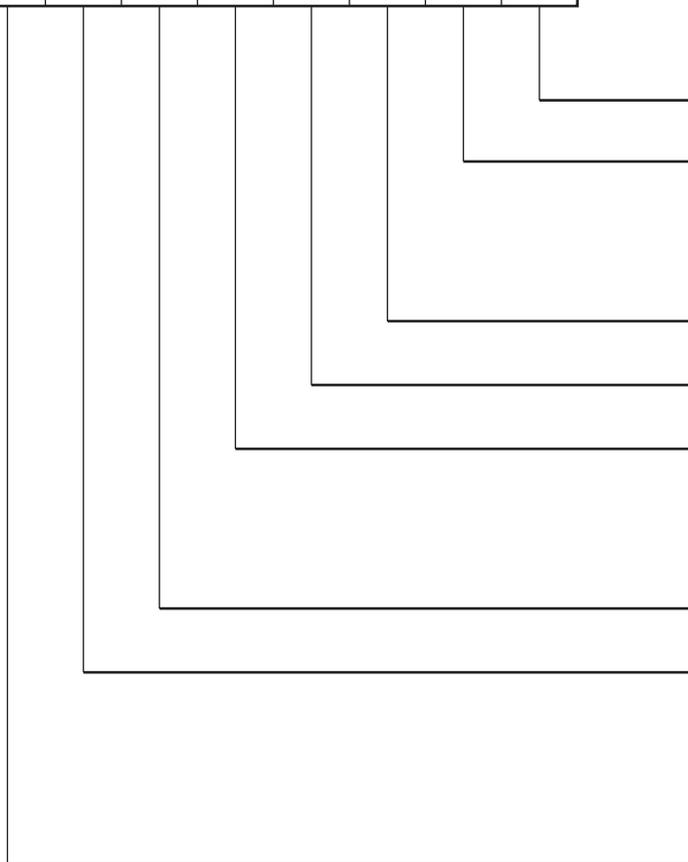

Mounting position

High speed shaft

- S** solid
- PAM** hollow+motor flange
- B** solid+motor flange

Shaft arrangement

Transmission ratio i_N

Output shaft

- S** solid
- C** hollow
- UB** hollow with shrink disc

Size

No. of stages

- A** single reduction
- B** double reduction
- C** triple reduction
- D** quadruple reduction

Type

- P** helical unit
- RH** horizontal bevel-helical unit
- RV** vertical bevel-helical unit

KEY TO SYMBOLS

f_m	mechanical service factor	
i	transmission ratio	
i_N	nominal transmission ratio	
η	efficiency	
f_a	ambient correction factor	
n_1	high speed	min ⁻¹ or rpm
n_2	low speed	min ⁻¹ or rpm
P_t	thermal capacity	kW
P_{tN}	nominal thermal capacity	kW
P_N	nominal power	kW
P	absorbed motor power	kW
t	temperature	°C celsius
T	torque	Nm
T_N	nominal torque	Nm
Fr_1	high speed shaft overhung load	N
Fr_2	low speed shaft overhung load	N
J_1	high speed shaft mass moment of inertia	Kgm ²

EFFICIENCY (η)

99% Single reduction helical unit
 98% Double reduction helical unit
 98% Triple reduction helical unit
 96% Quadruple reduction helical unit

97.5% Double reduction bevel-helical unit
 96.5% Triple reduction bevel-helical unit
 95.5% Quadruple reduction bevel-helical unit

MECHANICAL SERVICE FACTOR f_m

For stop-starts per hour exceeding 5, please refer to us.

Prime Mover	Duration of service (hrs/day)	Load classification		
		Uniform load	Moderate shock	Heavy shock
El. motor, steam turbine, hydraulic motor.	< 3	0.8	1.0	1.5
	3 - 10	1.0	1.25	1.75
	> 10	1.25	1.5	2.0
Multi-cylinder internal combustion engine.	< 3	1.0	1.25	1.75
	3 - 10	1.25	1.5	2.0
	> 10	1.5	1.75	2.25
Single-cylinder internal combustion engine.	< 3	1.25	1.5	2.0
	3 - 10	1.5	1.75	2.5
	> 10	1.75	2.0	2.5

LOAD CLASSIFICATION

- U** Uniform load
- M** Moderate shock
- H** Heavy shock
- *** refer to us

Driven machine	Type of load
Agitators	
pure liquids	U
liquids and solids	M
liquids-variable density	M
Blowers	
centrifugal	U
lobe	M
vane	U
Car pullers	M
Clarifiers	U
Clay working machinery	
brick press	H
briquette machine	H
clay working machinery	M
Compressors	
centrifugal	U
lobe	M
reciprocating	
multi-cylinder	M
single-cylinder	H
Conveyors-uniformly fed	
apron	U
assembly	U
belt	U
bucket	U
chain	U
screw	U
Conveyors-heavy duty	
apron	M
assembly	M
belt	M
bucket	M
chain	M
reciprocating	H
screw	M
shaker	H

Driven machine	Type of load
Cranes	
main hoist	*
bridge travel	*
trolley travel	*
Crushers	
ore	H
stone	H
sugar	H
Dredges	
conveyors	M
cutter head drives	H
pumps	M
screen drive	H
stackers	M
Elevators	
bucket-uniform load	U
bucket-heavy load	M
centrifugal discharge	U
gravity discharge	U
Fans	
centrifugal	U
cooling towers	
induced draft	M
forced draft	*
large, mining	M
large, industrial	M
light, small diameter	U
Feeders	
apron	M
belt	M
disc	U
reciprocating	H
screw	M

Driven machine	Type of load
Food industry	
slicers	M
cereal cooker	U
dough mixer	M
meat grinders	M
Generators	U
Hoists	
heavy duty	H
medium duty	M
Laundry tumblers	M
Lumber industry	
de-barkers	M
burner conveyor	M
chain saw, drag saw	H
chain transfer	H
craneway transfer	H
conveyor	M
slab conveyor	H
conveyor-belt	U
conveyor-chain	M
tipple hoist conveyor	M
tipple hoist drive	M
waste conveyor	
Machine tools	
bending roll	M
punch press-gear driven	H
plate planers	H
tapping machine	H
other machine tools	
main drives	M
auxiliary drives	U
Metal mills	
slitters	M
table conveyors	
non-reversing	M
reversing	*
wire winding machine	M
Mixers	
concrete mixer	M
constant density	U
variable density	M
Oil well pumping	*
Paper mills	
agitators	M
de-barkers-hydraulic	M
de-barkers-mechanical	H
barking drum	H
bleacher	U
calenders	M
conveyors	U
cutters-plates	M

Driven machine	Type of load
cylinders	M
dryers	M
felt stretcher	M
felt wipper	H
jordans	M
Printing press	U
Pumps	
centrifugal	U
proportioning	M
reciprocating	
single acting >2 cylinders	M
single acting <3 cylinders	*
double acting >1 cylinder	M
double acting 1 cylinder	*
rotary,gear, lobe type	U
Rubber and plastics	
crackers	H
refiners	M
rubber calenders	M
films extruders	U
sheets extruders	U
extruders	U
Sand muller	M
Sewage disposal equip.	
bar screeners	U
chemical feeders	U
dewatering screws	M
scum breakers	M
mixers	M
thickeners	M
vacuum filter	M
Screens	
air washing	M
rotary-stone or gravel	U
travelling water intake	M
Sugar industry	
cane and beet knives	M
crushers	M
pulp conveyors	M
Textile industry	
calenders	M
cards	M
dryers	M
dyeing machinery	M
knitting machines	*
looms	M
mangles	M
soapers	M
spinners	M
washers	M



THERMAL CAPACITY

Nominal thermal capacities P_{tN}

The tables below show the values of the thermal capacities under different cooling conditions, viz : natural cooling, fan cooling and coil cooling. Values apply to an ambient temperature of 20°C. For different ambient temperatures, the nominal thermal capacity P_{tN} can be obtained by multiplying the thermal capacity P_t for the selected type of cooling, by the ambient thermal factor f_a . Whenever a high heat dissipation level is required together with high operational reliability, it is recommended to consider the application of a water-oil or air-oil heat exchanger.

$$P_{tN} = P_t \times f_a$$

f_a ambient correction factor

Ambient temperature	w/o auxiliary cooling	Auxiliary cooling
10 °C	1,14	1,04
20 °C	1	1
30 °C	0,86	0,94
40 °C	0,72	0,89
50 °C	0,56	0,83

Thermal capacity (kW)

A - No auxiliary cooling

	n_1	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	
PA	1750	60	77	100	122	155	190	226	289	359	437	547						
	1500	55	72	93	115	148	180	212	271	338	408	505						
	1000	52	68	88	109	140	170	200	256	320	386	477						
	750	51	67	86	107	137	167	195	251	313	377	467						
PB	1750	33	44	57	72	94	116	136	175	223	275	345	429	549	683	835	1045	
	1500	30	40	52	66	86	106	125	163	206	252	316	395	502	630	768	960	
	1000	28	38	49	63	82	100	119	156	197	240	301	378	481	603	732	914	
	750	27	36	47	59	77	95	112	147	185	227	284	356	452	567	691	864	
PC	1750	25	34	44	56	72	89	107	138	177	217	275	349	441	538	678	848	
	1500	23	31	40	51	66	82	98	127	162	199	252	320	405	494	622	778	
	1000	21	29	37	47	61	76	91	118	151	185	234	298	377	459	578	724	
	750	21	28	36	46	59	74	88	114	146	179	227	288	365	445	560	700	
PD	1750	20	26	35	44	57	71	85	111	142	175	223	279	354	457	558	698	
	1500	18	24	32	40	52	65	78	102	130	161	205	256	325	419	512	640	
	1000	17	22	29	37	48	60	72	94	120	148	189	236	299	385	471	589	
	750	16	22	29	36	47	59	70	92	117	145	185	230	293	377	461	576	

	n_1	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
RB	1750	33	44	57	72	94	116	136	175	223	275	345	429	549	683	835	1045
	1500	30	40	52	66	86	106	125	163	206	252	316	395	502	630	768	960
	1000	28	38	49	63	82	100	119	156	197	240	301	378	481	603	732	914
	750	27	36	47	59	77	95	112	147	185	227	284	356	452	567	691	864
RC	1750	25	34	44	56	72	89	107	138	177	217	275	349	441	538	678	848
	1500	23	31	40	51	66	82	98	127	162	199	252	320	405	494	622	778
	1000	21	29	37	47	61	76	91	118	151	185	234	298	377	459	578	724
	750	21	28	36	46	59	74	88	114	146	179	227	288	365	445	560	700
RD	1750	20	26	35	44	57	71	85	111	142	175	223	279	354	457	558	698
	1500	18	24	32	40	52	65	78	102	130	161	205	256	325	419	512	640
	1000	17	22	29	37	48	60	72	94	120	148	189	236	299	385	471	589
	750	16	22	29	36	47	59	70	92	117	145	185	230	293	377	461	576

Thermal capacity (kW)

B - Fan cooling

	n ₁	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	
PA	1750	87	112	145	177	225	276	328	419	521	634	793						
	1500	80	104	135	167	215	261	307	393	490	592	732						
	1000	75	99	128	158	203	247	290	371	464	560	692						
	750	74	97	125	155	199	242	283	364	454	547	677						
PB	1750	48	64	83	104	136	168	197	254	323	399	500	622	796	990	1211	1515	
	1500	44	58	75	96	125	154	181	236	299	365	458	573	728	914	1114	1392	
	1000	41	55	71	91	119	145	173	226	286	348	436	548	697	874	1061	1325	
	750	39	52	68	86	112	138	162	213	268	329	412	516	655	822	1002	1253	
PC	1750	36	49	63	81	104	130	155	201	256	315	398	506	640	781	983	1230	
	1500	33	45	58	74	96	119	142	184	235	289	365	464	587	716	902	1128	
	1000	31	42	54	69	89	111	132	171	218	268	340	432	546	666	839	1049	
	750	30	40	52	67	86	107	128	166	211	260	329	418	529	645	812	1015	

With 2 fans, multiply by 1.2

	n ₁	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
RB	1750	50	66	86	108	141	174	204	263	335	413	518	644	824	1025	1253	1568
	1500	45	60	78	99	129	159	188	245	309	378	474	593	753	945	1152	1440
	1000	42	57	74	95	123	150	179	234	296	360	452	567	722	905	1098	1371
	750	41	54	71	89	116	143	168	221	278	341	426	534	678	851	1037	1296
RC	1750	38	51	65	83	108	134	160	208	265	325	412	523	662	808	1017	1272
	1500	35	47	60	77	99	123	147	191	243	299	378	480	608	741	933	1167
	1000	32	43	56	71	92	114	137	177	226	278	352	446	565	689	868	1085
	750	31	42	54	69	89	111	132	171	219	269	340	432	547	667	840	1050
RD	1750	29	39	52	65	85	106	128	167	213	263	335	419	531	685	837	1046
	1500	27	36	48	60	78	98	117	153	195	242	308	384	488	629	768	960
	1000	25	33	44	55	72	90	108	141	179	222	283	353	449	578	707	883
	750	24	32	43	54	70	88	105	138	176	217	277	346	439	566	691	864

C - Cooling coil

	n ₁	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
PA	1750	87	112	145	177	225	276	328	419	521	634	793					
	1500	80	104	135	167	215	261	307	393	490	592	732					
	1000	75	99	128	158	203	247	290	371	464	560	692					
	750	74	97	125	155	199	242	283	364	454	547	677					
PB	1750	48	64	83	104	136	168	197	254	323	399	500	622	796	990	1211	1515
	1500	44	58	75	96	125	154	181	236	299	365	458	573	728	914	1114	1392
	1000	41	55	71	91	119	145	173	226	286	348	436	548	697	874	1061	1325
	750	39	52	68	86	112	138	162	213	268	329	412	516	655	822	1002	1253
PC	1750	36	49	63	81	104	130	155	201	256	315	398	506	640	781	983	1230
	1500	33	45	58	74	96	119	142	184	235	289	365	464	587	716	902	1128
	1000	31	42	54	69	89	111	132	171	218	268	340	432	546	666	839	1049
	750	30	40	52	67	86	107	128	166	211	260	329	418	529	645	812	1015


	n ₁	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
RB	1750	48	64	83	104	136	168	197	254	323	399	500	622	796	990	1211	1515
	1500	44	58	75	96	125	154	181	236	299	365	458	573	728	914	1114	1392
	1000	41	55	71	91	119	145	173	226	286	348	436	548	697	874	1061	1325
	750	39	52	68	86	112	138	162	213	268	329	412	516	655	822	1002	1253
RC	1750	36	49	63	81	104	130	155	201	256	315	398	506	640	781	983	1230
	1500	33	45	58	74	96	119	142	184	235	289	365	464	587	716	902	1128
	1000	31	42	54	69	89	111	132	171	218	268	340	432	546	666	839	1049
	750	30	40	52	67	86	107	128	166	211	260	329	418	529	645	812	1015
RD	1750	28	38	51	63	82	103	123	161	205	254	324	405	514	662	809	1012
	1500	26	35	46	58	75	94	113	148	189	233	297	371	471	608	742	928
	1000	24	32	43	53	69	87	104	136	173	215	273	342	434	559	683	854
	750	23	31	42	52	68	85	102	133	170	210	268	334	424	547	668	835



SELECTION PROCEDURES

Data required :

- Absorbed motor power P (kW)
- Input speed n_1 (min^{-1})
- Gearbox ratio i_N
- Application f_m

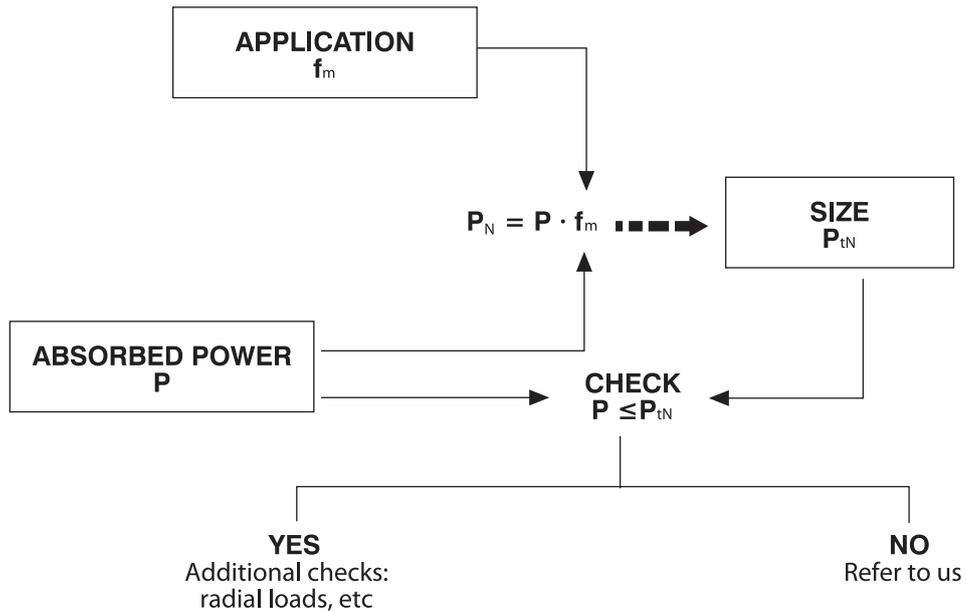

Example:

Helical unit

- $i_N = 5,6$
- $P = 220$ kW at 1500 min^{-1}
- $f_m = 1,75$
- Ambient temperature = 30°C

$$P_N = P \cdot f_m = 220 \times 1,75 = 385 \text{ kW}$$

The unit PA 80 gives 441 kW at 1500 rpm, hence it should be mechanically suitable for the application required. The nominal thermal capacity without auxiliary cooling (see table on page 7) is :

$$P_{tN} = 180 \times 0,86 = 155 \text{ kW}$$

Since this value is lower than power P , the extra heat generated must be dissipated by an auxiliary system with fan, for instance.

The nominal thermal capacity becomes :

$$P_{tN} = 261 \times 0,94 = 245 \text{ kW}$$

Since $P=220$ kW is lower than $P_{tN} = 245$ kW, the unit with one fan is convenient.

In addition to the auxiliary cooling (fan/s, coil and fan+coil), we recommend to consider that a definitive solution to the thermal problem can be achieved by a cooler (oil/water or oil/air if water is not available). For medium to large unit sizes, such cooler is cost effective thus guaranteeing the best reliability.

**HELICAL
UNITS**

**BEVEL-HELICAL
UNITS**

P Series - Helical units - Nominal power rating (kW)

		Size																
PA	i _N	n ₁ n ₂ min ⁻¹	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
			1.12	1500 1000 750	1339 893 670	301 220 165	416 296 229	587 410 321	824 578 447	1212 856 656	1661 1173 901	2424 1702 1312	3385 2381 1836	4709 3316 2550	6679 4695 3619	9723 6847 5273		
1.25	1500 1000 750	1200 800 600	295 214 167	398 299 224	563 417 319	788 584 450	1181 865 662	1610 1183 906	2321 1710 1314	3257 2394 1834	4529 3336 2558	6418 4720 3622	9394 6912 5307					
1.4	1500 1000 750	1071 714 536	286 198 155	389 275 212	548 388 302	772 537 419	1142 800 629	1573 1094 861	2255 1580 1236	3148 2206 1729	4395 3072 2410	6229 4354 3416	9174 6411 5024					
1.6	1500 1000 750	938 625 469	265 190 148	357 258 204	509 366 284	708 519 399	999 732 564	1453 1057 818	2071 1510 1163	2897 2108 1627	4049 2945 2274	5735 4175 3221	8031 5848 4510					
1.8	1500 1000 750	833 556 417	236 181 136	326 248 186	461 349 266	647 485 372	927 689 526	1337 1001 765	1893 1413 1083	2654 1981 1513	3706 2766 2119	5258 3919 3001	7392 5517 4217					
2	1500 1000 750	750 500 375	224 166 124	305 224 172	432 319 243	597 445 342	856 639 487	1250 926 711	1755 1304 994	2452 1822 1390	3431 2549 1947	4860 3611 2760	6867 5102 3901					
2.25	1500 1000 750	667 444 333	205 150 116	282 207 159	394 290 221	553 410 311	793 584 449	1161 856 653	1608 1190 910	2250 1664 1273	3153 2332 1780	4467 3305 2524	6344 4693 3582					
2.5	1500 1000 750	600 400 300	198 141 112	271 189 152	382 272 214	537 380 301	771 544 431	1058 748 593	1571 1100 874	2178 1540 1224	3049 2162 1715	4324 3060 2427	6158 4358 3458					
2.8	1500 1000 750	536 357 268	172 130 101	236 176 138	333 248 195	468 350 271	675 508 392	928 697 540	1368 1015 790	1896 1425 1103	2656 1996 1548	3767 2827 2194	5398 4053 3143					
3.15	1500 1000 750	476 317 238	149 112 87	203 152 119	309 231 181	435 325 254	587 441 343	866 651 507	1169 875 684	1635 1229 959	2471 1857 1450	3504 2630 2054	4691 3522 2748					
3.55	1500 1000 750	423 282 211	137 104 80	188 140 110	265 198 155	373 279 218	545 409 319	749 563 438	1081 809 632	1511 1136 886	2119 1593 1244	3005 2256 1761	4355 3270 2552					
4	1500 1000 750	375 250 188	128 88 68	174 119 93	265 185 145	373 258 201	508 349 274	698 481 378	998 686 538	1397 960 753	2135 1470 1152	3026 2084 1633	4060 2796 2191					
4.5	1500 1000 750	333 222 167	117 80 62	159 108 87	226 155 122	316 218 170	471 323 253	648 446 349	918 631 494	1286 883 692	1806 1241 972	2559 1757 1377	3764 2587 2027					
5	1500 1000 750	300 200 150	96 66 50	131 90 69	186 126 98	262 179 136	394 267 203	540 367 282	760 517 396	1064 724 553	1498 1017 777	2119 1442 1102	3139 2134 1632					
5.6	1500 1000 750	268 179 134	78 54 40	107 73 56	151 104 80	210 144 111	288 197 152	441 302 231	613 422 322	858 590 452	1209 828 634	1712 1174 900	2303 1580 1211					
PB																		
6.3	1500 1000 750	238 159 119	83 57 43	108 76 57	165 113 86	221 153 116	320 220 166	454 331 237	644 443 336	880 605 459	1324 911 691	1796 1236 936	2547 1754 1328	3100 2134 1617	4342 2988 2264	6003 4132 3130	8893 6120 4638	11914 8199 6214
7.1	1500 1000 750	211 141 106	73 50 38	102 71 53	146 101 77	196 135 102	281 194 146	401 277 210	569 392 297	828 570 432	1177 810 614	1587 1092 827	2243 1545 1170	2757 1896 1437	3858 2655 2012	5665 3898 2955	7964 5481 4153	10598 7295 5527
8	1500 1000 750	188 125 94	64 44 33	90 63 48	130 89 69	184 127 97	264 181 138	353 243 187	501 345 265	731 419 386	1043 718 558	1489 1025 785	2102 1448 1108	2440 1680 1286	3418 2352 1800	5032 3463 2651	7094 4882 3738	9967 6858 5251
9	1500 1000 750	167 111 83	56 39 30	81 55 42	116 79 61	165 111 86	235 156 123	315 213 165	446 302 233	652 442 342	936 634 490	1328 900 696	1871 1267 980	2187 1482 1146	3062 2074 1604	4525 3065 2370	6412 4343 3359	8957 6065 4691
10	1500 1000 750	150 100 75	53 36 28	71 48 37	102 69 54	144 97 75	219 148 115	294 199 154	433 282 218	570 386 299	822 557 430	1160 786 607	1627 1102 852	2049 1388 1074	2869 1944 1503	3982 2696 2086	5660 3833 2965	7875 5334 4125
11.2	1500 1000 750	134 89 67	46 31 24	66 45 35	89 60 47	134 90 70	190 128 99	255 173 134	361 244 189	532 360 279	717 486 376	1081 733 566	1512 1024 792	1791 1212 938	2506 1697 1312	3726 2524 1952	4976 3370 2606	7367 4989 3859
12.5	1500 1000 750	120 80 60	44 29 23	58 40 30	84 58 45	117 80 62	165 112 86	240 164 126	340 232 179	467 318 246	679 462 357	949 646 499	1318 897 693	1694 1153 891	2371 1613 1247	3295 2243 1733	4730 3219 2488	6505 4427 3422
14	1500 1000 750	107 71 54	37 25 19	54 37 28	73 50 39	108 74 57	152 103 80	205 140 108	291 198 153	432 295 228	584 398 307	878 598 462	1216 827 639	1458 993 767	2041 1389 1074	3062 2084 1611	4102 2792 2158	6052 4119 3183
16	1500 1000 750	94 63 47	34 24 18	46 31 24	67 47 36	92 64 50	128 89 69	189 131 101	267 186 143	367 255 197	540 375 290	745 517 399	1023 710 548	1346 935 722	1885 1308 1010	2622 1821 1406	3798 2638 2037	5190 3590 2772
18	1500 1000 750	83 56 42	31 22 17	43 29 23	58 40 31	86 60 46	119 83 64	161 111 86	250 173 134	344 238 184	465 322 249	696 483 373	951 660 519	1158 804 620	1770 1227 948	2463 1709 1319	3303 2291 1769	4157 3370 2601
20	1500 1000 750	75 50 38	26 18 14	39 27 20	53 37 28	78 55 41	108 75 57	146 101 77	207 143 108	313 217 164	424 294 223	635 423 333	862 598 452	1054 731 553	1476 1024 774	2256 1565 1183	3027 2100 1588	4449 3087 2334
22.5	1500 1000 750	67 44 33			48 33 25				131 91 69	186 129 97	385 267 202	518 345 271	776 538 407	951 660 498	1331 924 698	1844 1280 967		3636 2522 1909
25	1500 1000 750	60 40 30												692 481 363				

P Series - Helical units - Nominal power rating (kW)

PC	i_N	n_1	n_2	Size															
				10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
22.5		1500	67	25	35		68	100										3130	
		1000	44	17	24		46	68										2125	
		750	33	13	18		35	52										1617	
25		1500	60	22	31	47	65	90	129	176	254	369	520	1044	1410	2015	2955	4097	
		1000	40	15	21	31	43	61	88	120	172	251	353	709	958	1369	2008	2784	
		750	30	11	16	24	33	47	67	91	131	191	269	540	729	1042	1528	2118	
28		1500	54	21	27	41	57	80	115	167	226	329	464	640	935	1331	1793	2639	
		1000	36	14	19	28	39	54	78	113	153	224	315	435	635	904	1218	1793	
		750	27	11	14	21	30	41	60	86	117	170	240	331	483	688	927	1364	
31.5		1500	48	19	26	37	51	76	104	148	200	294	413	569	836	1184	1591	2347	
		1000	32	13	17	25	35	51	70	101	136	199	280	386	568	805	1081	1595	
		750	24	9.7	13	19	26	39	53	77	104	152	213	284	432	612	824	1213	
35.5		1500	42	17	23	33	45	67	92	131	189	261	366	504	746	1051	1498	2087	
		1000	28	11	16	22	31	46	62	89	128	177	249	343	507	714	1017	1418	
		750	21	8.6	12	17	23	35	48	68	98	135	189	261	385	543	774	1079	
40		1500	38	15	20	29	40	59	82	116	166	231	324	474	662	929	1323	1850	
		1000	25	10	14	19	27	40	56	79	113	157	220	322	450	631	898	1256	
		750	18.8	7.5	11	15	21	31	42	60	86	119	167	245	342	480	683	956	
45		1500	33	13	18	26	35	52	72	102	146	204	285	417	586	817	1162	1631	
		1000	22	8.8	12	17	24	35	49	69	99	139	193	283	398	555	789	1108	
		750	16.7	6.8	9.2	13	18	27	37	53	76	105	147	216	303	422	601	843	
50		1500	30	12	17	24	33	45	64	96	137	191	266	365	515	764	1086	1527	
		1000	20	8.2	11	16	22	31	43	65	93	130	181	248	349	519	738	1037	
		750	15	6.3	9	12	17	24	33	49	71	99	137	189	266	395	516	789	
56		1500	27	11	14	21	29	43	59	83	119	167	232	340	481	665	944	1333	
		1000	17.9	7.1	10	14	19	29	40	56	81	113	157	231	327	452	641	905	
		750	13.4	5.5	7.5	11	15	22	31	43	61	86	120	176	249	344	488	689	
63		1500	24	9.8	13	20	27	37	52	77	110	155	215	293	417	617	876	1242	
		1000	15.9	6.7	9.1	13	18	25	35	52	75	106	146	199	284	419	595	844	
		750	11.9	5	7	10	14	19	27	40	57	80	111	151	216	319	453	642	
71		1500	21	8.3	11	17	23	34	48	66	94	134	184	270	387	528	749	1070	
		1000	14	5.7	7.7	11	15	23	32	45	64	91	125	184	263	359	509	727	
		750	10.6	4.4	5.9	9	12	18	25	34	49	69	95	140	200	273	387	553	
80		1500	18.8	7.8	11	16	21	31	41	61	87	123	169	249	329	486	689	988	
		1000	12.5	5.2	7.2	11	14	21	28	41	59	84	115	169	224	330	468	671	
		750	9.4	4	5.4	8	11	16	21	31	45	64	87	129	170	251	356	511	
90		1500	16.7	7.1	9.7	13	19	26	37	56	79	104	155	208	302	445	630	832	
		1000	11	4.8	6.6	8.9	13	18	25	38	54	71	105	141	205	302	428	565	
		750	8.3	3.7	5	6.8	9.9	13	19	29	41	54	80	107	156	230	326	430	
100		1500	15	6.5	8.8	12	17	24	34	50	65	94	140	187	275	405	519	757	
		1000	10	4.3	6	8.1	12	17	23	34	44	64	95	127	187	275	353	515	
		750	7.5	3.3	4.6	6.1	9	13	19	26	33	49	73	97	142	209	268	392	
PD	100	1500	15						25										
		1000	10						17										
		750	7.5						13										
112		1500	13.4	5.7	7.6	11	16	22	30	45	62	87	125	178	244	359	495	694	
		1000	8.9	3.9	5.1	7.4	10	15	20	30	42	59	85	121	165	244	336	471	
		750	6.7	2.9	3.9	5.6	7.9	11	15	23	32	44	64	92	125	184	254	356	
115		1500	12	5	6.8	9.7	14	20	28	40	56	82	111	159	230	320	442	656	
		1000	8	3.4	4.6	6.6	9.3	13	19	27	38	56	76	108	156	217	300	446	
		750	6	2.5	3.5	5	7	10	15	20	28	42	57	81	117	163	226	335	
140		1500	10.7	4.5	6.1	9.2	12	18	25	36	53	74	99	141	205	285	417	588	
		1000	7.1	3.1	4.1	6.2	8.3	12	17	24	36	50	67	95	139	193	282	398	
		750	5.4	2.3	3.1	4.7	6.2	8.9	13	18	27	37	50	71	104	144	212	299	
160		1500	9.4	4	5.5	7.7	11	16	23	32	44	62	88	125	182	253	350	497	
		1000	6.3	2.6	3.7	5.2	7.3	10	15	21	30	42	59	84	122	170	235	334	
		750	4.7	2	2.8	3.9	5.5	7.8	11	16	22	31	44	63	92	127	177	251	
180		1500	8.3	3.6	4.9	6.9	9.6	14	20	28	42	55	78	110	161	223	329	442	
		1000	5.6	2.4	3.3	4.6	6.4	9.2	13	19	28	37	52	73	108	149	220	295	
		750	4.2	1.8	2.5	3.5	4.8	6.9	10	14	21	28	39	55	81	112	165	222	
200		1500	7.5	3.2	4.4	6.5	9	13	18	24	37	52	73	103	142	196	291	416	
		1000	5	2.1	2.9	4.3	6	8.5	12	16	24	35	49	68	95	130	194	278	
		750	3.8	1.6	2.2	3.3	4.5	6.4	8.8	12	18	26	36	51	71	98	145	208	
225		1500	6.7	2.9	3.9	5.7	7.8	11	16	23	32	46	64	89	133	182	253	366	
		1000	4.5	1.9	2.6	3.8	5.2	7.4	11	15	21	31	42	59	88	122	169	244	
		750	3.3	1.4	1.9	2.9	3.9	5.6	8.2	11	16	23	32	44	66	91	127	183	
250		1500	6	2.6	3.6	5	7.3	10	14	21	30	40	59	82	115	170	236	320	
		1000	4	1.7	2.4	3.3	4.9	6.9	9.5	14	20	27	39	55	77	113	157	213	
		750	3	1.3	1.8	2.5	3.7	5.2	7.1	11	15	20	30	41	57	85	118	160	
280		1500	5.4	2.3	3.2	4.7	6.3	8.8	13	18	26	37	51	70	107	146	203	298	
		1000	3.6	1.5	2.1	3.1	4.2	5.9	8.8	12	17	25	34	47	71	97	135	199	
		750	2.7	1.1	1.6	2.3	3.1	4.3	6.6	9.1	13	19	25	35	53	73	101	149	
315		1500	4.8	2.1	2.7	4	5.8	8.1	11	17	24	32	47	65	91	134	187	256	
		1000	3.2	1.4	1.8	2.7	3.9	5.4	7.5	11	16	21	31	43	61	90	125	171	
		750	2.4	1.1	1.4	2	2.9	4	5.6	8.4	12	16	23	32	46	67	93	128	
355		1500	4.2																

RH • RV Series - Bevel-helical units - Nominal power rating (kW)

		Size															
i _N	n ₁ / n ₂ min ⁻¹	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
		RHB RVB															
5	1500	300	75	107	147	207	287	401	573	814	1186	1698	2363				
	1000	200	50	74	100	140	193	272	388	553	805	1153	1606				
	750	150	39	55	77	107	148	207	296	420	612	878	1221				
5.6	1500	268	73	106	146	209	287	400	571	812	1186	1698	2363				
	1000	179	51	73	99	141	193	273	389	551	805	1154	1606				
	750	134	38	55	76	107	148	207	295	419	612	877	1222				
6.3	1500	238	74	108	147	209	285	401	572	814	1187	1697	2363				
	1000	159	51	75	100	141	193	273	388	553	807	1152	1606				
	750	119	38	55	76	107	148	207	295	420	613	877	1222				
7.1	1500	211	68	99	134	192	262	369	526	747	1092	1561	2175				
	1000	141	51	72	99	141	194	272	388	552	805	1152	1605				
	750	106	38	55	76	108	148	207	295	420	612	877	1221				
8	1500	188	64	85	123	174	249	348	497	703	996	1413	2051				
	1000	125	47	64	93	129	185	260	370	524	742	1052	1528				
	750	94	37	51	74	103	148	206	295	418	592	839	1218				
9	1500	167	63	86	124	173	225	350	502	702	993	1410	1825				
	1000	111	45	60	85	120	156	243	347	487	688	977	1265				
	750	83	33	45	65	91	119	185	264	371	524	743	962				
10	1500	150	47	60	110	154	181	244	343	485	888	1262	1465				
	1000	100	32	41	75	105	123	166	233	330	603	857	995				
	750	75	24	32	57	80	94	126	177	251	459	652	757				
11.2	1500	134	37	48	66	91	144	194	271	382	525	740	1163				
	1000	89	25	32	44	63	98	131	184	259	357	503	790				
	750	67	19	25	34	48	74	100	140	197	271	383	601				
12.5	1500	120	33	46	64	91	125	177	250	357	517	731	993				
	1000	80	23	32	44	62	85	120	170	243	352	497	675				
	750	60	17	24	33	47	65	91	129	185	268	378	513				
14	1500	107	33	47	64	91	126	177	250	357	517	730	992				
	1000	71	22	32	43	62	86	121	170	243	351	497	675				
	750	54	17	24	33	47	65	92	129	185	267	378	513				
16	1500	94	32	42	59	82	121	171	241	341	467	657	956				
	1000	63	21	29	39	56	82	115	163	231	316	445	647				
	750	47	17	22	30	42	62	88	124	176	241	339	493				
18	1500	83	25	32	44	61	96	130	181	254	348	490	766				
	1000	56	17	22	29	42	65	88	123	173	236	333	520				
	750	42	13	16	22	32	49	77	94	131	180	253	396				
20	1500	75	26	35	50	71	101	137	194	283	406	576	810	1114	1560	2323	
	1000	50	20	26	37	53	75	102	144	211	303	429	604	831	1162	1732	
	750	38	15	20	29	41	59	79	112	164	236	334	471	648	906	1350	
22.5	1500	67	26	35	49	70	99	143	203	279	403	567	794	1167	1641	2289	
	1000	44	18	24	33	48	67	98	148	190	274	385	539	792	1114	1555	
	750	33	13	18	25	36	51	74	105	144	209	293	411	604	849	1184	
25	1500	60	22	32	46	66	92	125	177	260	377	529	740	1021	1430	2137	
	1000	40	15	22	31	44	63	85	120	177	256	359	502	693	971	1451	
	750	30	11	17	24	34	48	65	91	135	195	274	383	528	740	1106	
28	1500	54	21	28	40	56	79	116	164	226	329	458	636	945	1329	1849	
	1000	36	14	19	27	38	54	79	112	153	223	311	432	642	903	1256	
	750	27	11	15	21	29	41	60	85	117	170	237	329	489	688	957	
31.5	1500	48	18	26	35	53	73	99	140	209	284	424	587	807	1133	1718	
	1000	32	12	17	23	35	50	68	95	142	193	288	398	548	770	1167	
	750	24	9.2	13	18	27	38	51	73	108	147	220	304	417	586	889	
35.5	1500	42	16	22	32	44	68	91	130	178	262	360	540	743	1042	1457	
	1000	28	11	15	22	30	46	62	88	121	178	245	366	505	708	989	
	750	21	8.4	11	16	23	35	47	67	92	136	186	279	385	539	754	
40	1500	38	15	20	29	41	56	84	118	163	242	330	450	682	954	1337	
	1000	25	10	14	20	28	38	57	80	111	164	224	306	463	648	908	
	750	18.8	7.7	10	15	21	29	43	61	84	125	171	233	353	494	692	
45	1500	33	14	18	27	37	51	76	108	148	221	300	407	622	869	1216	
	1000	22	9	12	18	25	34	52	73	101	150	204	276	422	590	826	
	750	16.7	7	9.5	14	19	26	39	56	77	114	155	211	322	449	629	
50	1500	30	12	17	23	34	49	66	94	129	175	261	360	537	750	1045	
	1000	20	8	11	16	23	33	45	64	88	119	178	245	365	510	710	
	750	15	6.2	8.6	12	17	25	34	49	67	91	135	186	278	388	541	
56	1500	27	11	14	21	30	41	61	86	119	161	240	330	492	690	960	
	1000	17.9	7.4	9.7	15	20	28	41	59	80	109	163	224	334	469	652	
	750	13.4	5.7	7.4	11	15	21	32	45	61	83	124	171	254	357	497	
63	1500	24	10	13	18	27	38	51	79	109	148	220	300	611	575	881	
	1000	15.9	6.7	8.8	12	19	26	35	54	74	100	150	204	279	390	598	
	750	11.9	5.2	6.8	9.4	14	19	26	41	56	76	114	155	213	298	456	
71	1500	21	8.2	12	17	22	34	46	65	99	135	201	272	373	520	801	
	1000	14	5.6	8	11	15	23	31	44	67	91	136	184	253	353	544	
	750	10.6	4.2	6.1	8.6	12	18	24	34	51	70	104	141	193	269	414	
80	1500	18.8				20	31	41	58	90	122	181	244			726	
	1000	12.5				14	21	28	40	61	83	123	166			493	
	750	9.4				10	16	21	30	46	63	94	126			376	

RHC
RVC

P Series - Helical units - Output torques TN_2 (Nm)

Size

i_N	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
PA 1.12	2300	3200	4600	6400	9100	12800	18300	25600	36500	51800	73100					
	1.25	2600	3500	5100	7200	10200	14300	20500	28600	40900	57900	81800				
	1.4	2700	3700	5400	7500	10800	15100	21600	30200	43100	61100	86200				
1.6	2900	4000	5700	8000	11400	16000	22800	31900	45600	64600	91200					
	1.8	3000	4100	6000	8400	11900	16700	23900	33400	47800	67700	95500				
	2	3100	4300	6200	8700	12400	17400	24800	34700	49600	70300	99300				
2.25	3300	4500	6400	9000	12900	18000	25800	36100	51500	73000	103000					
	2.5	3400	4600	6600	9300	13200	18500	26500	37100	53000	75000	105900				
	2.8	3500	4800	6900	9600	13700	19200	27500	38400	54900	77800	109800				
3.15	3500	4800	6900	9700	13800	19300	27600	38700	55300	78300	110500					
	3.55	3500	4800	6900	9700	13800	19300	27600	38700	55300	78300	110500				
	4	3500	4800	7000	9700	13900	19500	27800	38900	55600	78800	111200				
4.5	3500	4900	7000	9800	14000	19600	28000	39200	56000	79300	112000					
	5	3100	4300	6200	8600	12300	17300	24700	34500	49300	69900	98700				
	5.6	2800	3900	5600	7800	11200	15600	22300	31300	44600	63300	89300				





PB 6.3	3300	4500	6500	9100	13000	18200	26000	36400	52000	73600	103900	123900	175000	248200	349000	488500
	7.1	3300	4500	6500	9100	13000	18200	26000	36400	52000	73600	103900	124700	176100	249000	351600
	8	3300	4600	6600	9200	13100	18400	26300	36800	52500	74400	105000	126800	179000	253100	357000
9	3400	4600	6600	9300	13300	18600	26500	37100	53000	75100	106100	12900	182100	257400	363300	506500
	10	3400	4600	6600	9300	13300	18600	26500	37100	53000	75100	106100	129400	182700	259100	365100
	11.2	3400	4600	6600	9300	13300	18600	26500	37100	53000	75100	106100	130400	184000	260000	367700
12.5	3400	4700	6800	9500	13500	18900	27100	37900	54100	75100	108200	133500	188400	267200	376900	525700
	14	3400	4700	6800	9500	13500	18900	27100	37900	54100	76700	108200	134500	189900	268200	379700
	16	3500	4800	6900	9700	13800	19300	27600	38600	55200	76700	110300	137700	194400	275700	388000
18	3600	4900	7000	9800	14100	19700	28100	39400	56200	78100	112500	141700	199100	282300	399300	555800
	20	3500	4800	6900	9600	13800	19300	27500	38600	55100	79700	110200	139400	196900	277800	392900
	22.5			6900			19300	27500	38600	55100	78000	110200	139600	197200	278200	392900
25											110200					
28																
31.5																

PC 18																
	20															
	22.5	3500	4800		9600	14000									445400	
25	3500	4800	7000	9700	14100	19500	27800	39700	55800	78000	112800	157900	222600	317300	446700	623500
	28	3600	4900	7000	9800	14100	19600	28000	40000	56200	79100	112800	158400	224100	319200	449700
	31.5	3600	4900	7100	9800	14200	19800	28300	40200	56500	79600	113400	159300	224700	321900	451700
35.5	3600	4900	7100	9900	14300	19900	28400	40500	56800	80100	114100	160200	226100	322100	454700	634500
	40	3600	5000	7100	10000	14300	20000	28600	40600	57200	80600	114500	161200	227500	325200	457700
	45	3700	5000	7200	10100	14400	20200	28800	40800	57600	81100	115300	162100	228900	326600	461000
50	3700	5000	7200	10100	14500	20300	28900	41100	57800	81700	116100	163300	230500	327600	462000	645900
	56	3700	5100	7300	10200	14600	20400	29100	41300	58200	81900	116500	164300	231300	330300	465300
	63	3700	5100	7300	10200	14700	20500	29200	41600	58400	82600	117400	165000	233200	331400	467300
71	3800	5100	7400	10300	14800	20600	29500	41700	58900	82900	117900	166200	233900	334200	471300	658400
	80	3800	5100	7400	10400	14800	20800	29800	42100	59100	83600	118400	166800	235900	335600	473300
	90	3800	5200	7500	10400	15000	20900	29800	42300	59700	83900	119600	168300	236900	337300	477700
100	3800	5200	7500	10400		20900	29800	42500	59700	84300	119600	169100	238100	340000	479700	667900
	112															
	125															

PD 100					15000											
	112	3800	5200	7500	10500	15000	21000	29900	42500	59900	84300	120000	170000	239600	339900	479800
	125	3800	5200	7500	10500	15000	21000	29900	42800	59700	84800	120000	169600	239600	339700	477900
140	3800	5200	7500	10500	15000	20900	29900	42800	59700	84800	120000	169600	239500	338700	478000	668800
	160	3800	5200	7500	10500	15000	21000	29900	42700	59900	84800	120000	169500	239600	339800	479200
	180	3800	5200	7500	10500	15000	20900	29900	42800	59900	84900	120000	170000	239600	338600	479000
200	3800	5200	7500	10500	15000	21000	30000	42600	59900	84800	120000	170000	240000	340000	479000	670000
	225	3800	5200	7500	10500	15000	21000	30000	42800	60000	84900	120000	170000	240000	340000	480000
	250	3800	5200	7500	10500	15000	21000	30000	43100	60000	85000	120000	170000	240000	340000	480000
280	3800	5200	7500	10500	15000	21000	30000	43300	60000	85000	120000	170000	240000	340000	480000	670000
	315	3800	5200	7500	10500	15000	21000	30000	43600	60000	85000	120000	170000	240000	340000	480000
	355	3800	5200	7500	10500	15000	21000	30000	43800	60000	85000	120000	170000	240000	340000	480000
400	3800	5200	7500	10500	15000	21000	30000	44200	60000	85000	120000	170000	240000	340000	480000	670000
	450	3800	5200	7500	10500	21000	30000	44400	60000	85000	120000	170000	240000	340000	480000	670000
	500	3800	5200	7500	10500	21000	30000	44600	60000	85000	120000	170000	240000	340000	480000	670000

HELICAL UNITS





PA series single reduction

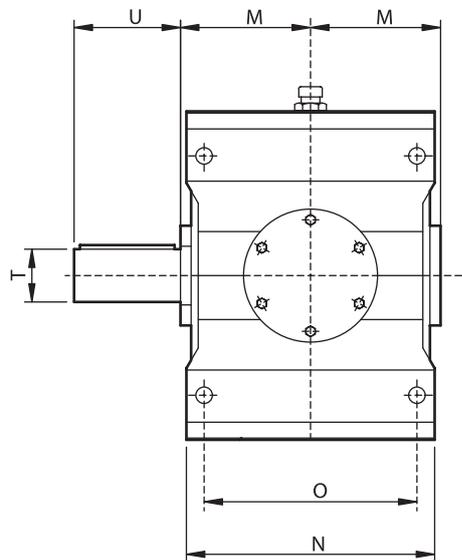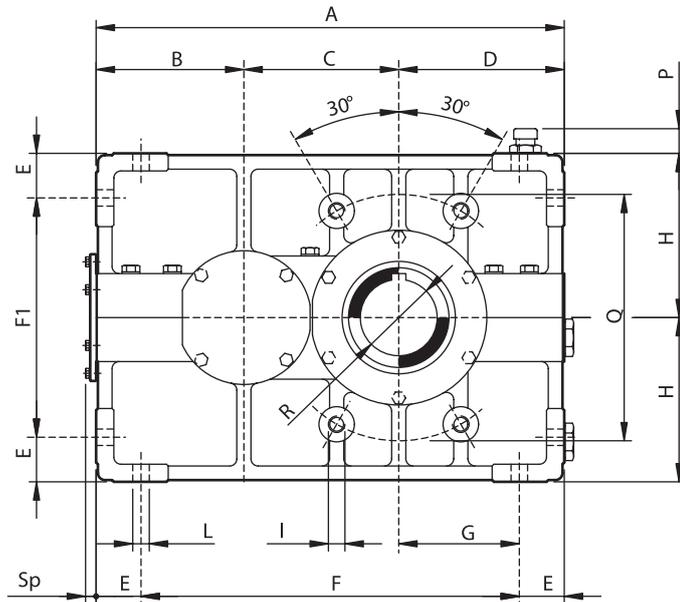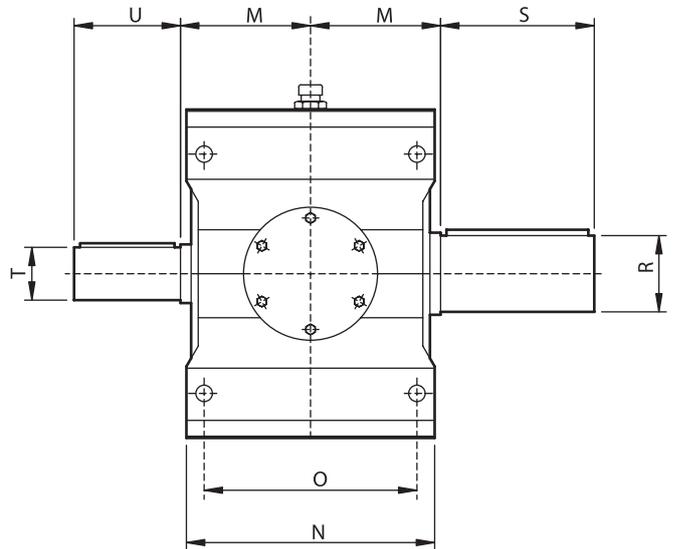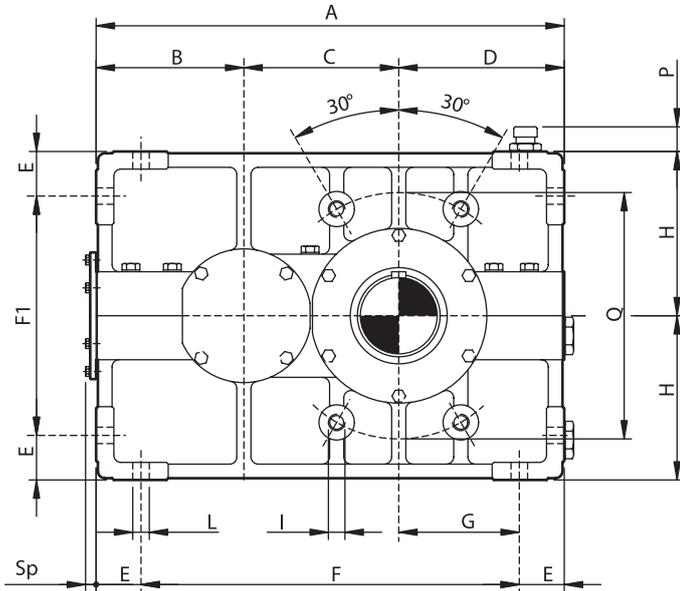

Size	iN 1.12-2.5																	iN 2.8-5.6					
	A	B	C	D	E	F	F1	G	H	I	L	M	N	O	P	Q	R	S	T	U	T	U	Sp
10	396	125	131	140	38	320	204	102	140	M16	14	115	210	180	20	210	65	110	45	90	35	70	13
20	450	140	150	160	42	366	236	118	160	M18	16	135	235	200	22	240	80	140	50	100	40	80	16
30	510	160	170	180	46	418	268	134	180	M20	18	145	260	220	22	270	90	160	55	110	45	90	17
40	570	180	190	200	52	466	296	148	200	M22	20	160	295	250	22	300	100	180	70	140	55	110	18
50	641	200	216	225	57	527	336	168	225	M24	22	170	325	275	22	340	110	200	75	150	60	120	22
60	715	225	240	250	62	591	376	188	250	M27	25	190	360	300	22	380	120	210	85	170	70	140	23
70	792	250	262	280	72	648	416	208	280	M30	27	225	415	350	25	430	140	250	90	180	80	160	25
80	895	280	300	315	80	735	470	235	315	M33	30	250	455	385	25	490	160	280	100	200	85	170	26
90	1010	315	340	355	87	836	536	268	355	M36	33	280	535	460	25	560	170	300	130	260	100	200	29
100	1135	355	380	400	93	949	614	307	400	M39	36	310	600	520	25	640	200	350	150	300	110	220	30
110	1282	400	432	450	100	1082	700	350	450	M42	39	375	710	620	25	730	220	390	160	320	130	260	32

HELICAL UNITS

PB series double reduction

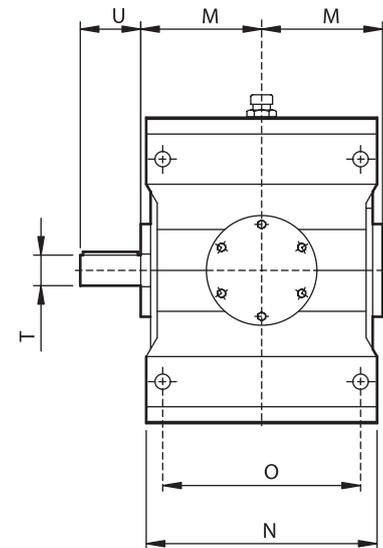
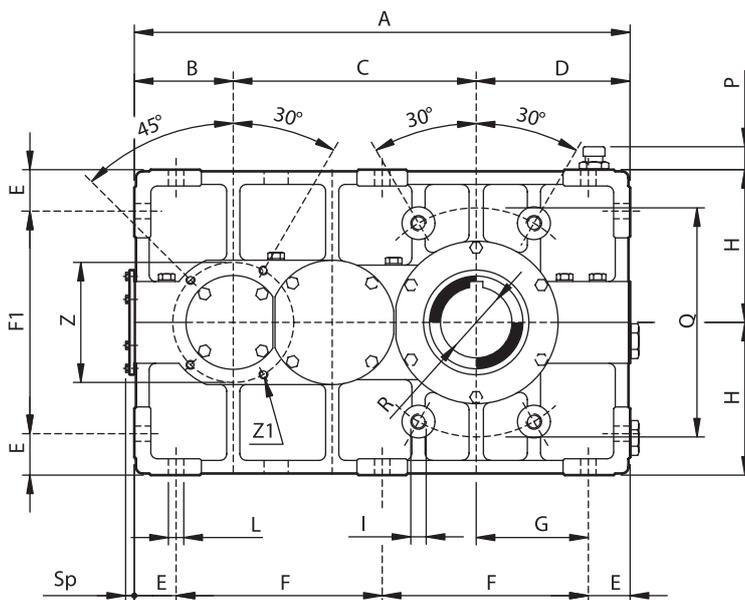
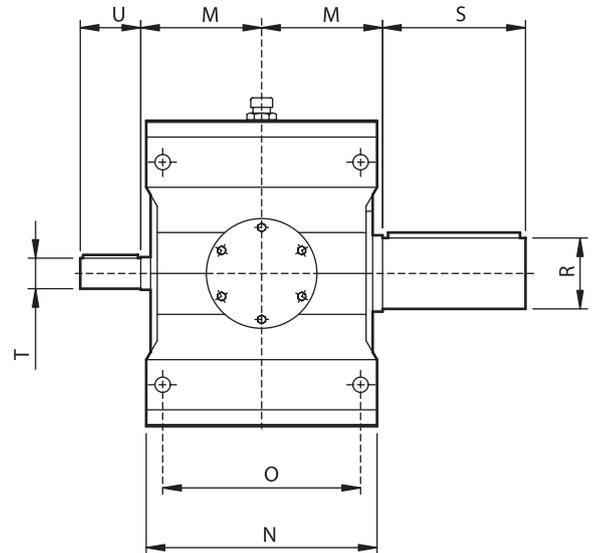
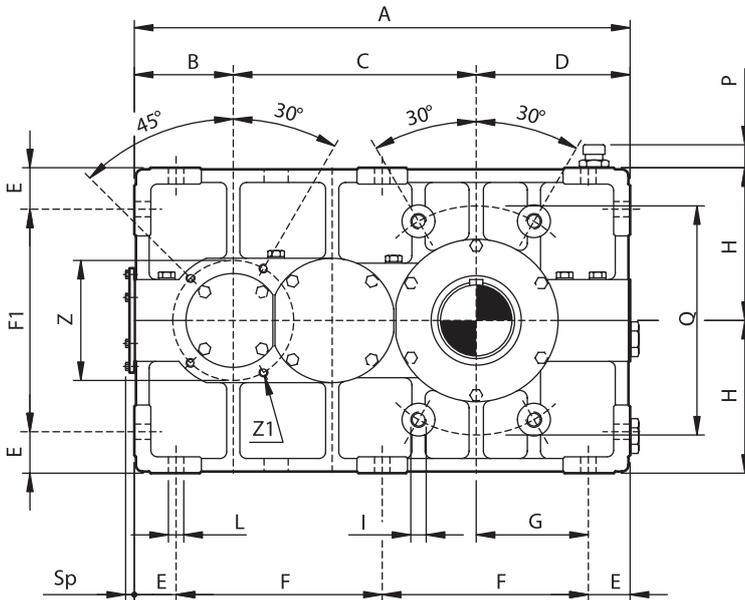


iN 6.3-11.2 iN 12.5-20

Size	A	B	C	D	E	F	F1	G	H	I	L	M	N	O	P	Q	R	S	T	U	T	U	Z	Z1	Sp
10	451	90	221	140	38	187,5	204	102	140	M16	14	115	210	180	20	210	65	110	28	55	24	50	110	M8	11
20	510	100	250	160	42	213	236	118	160	M18	16	135	235	200	22	240	80	140	32	65	28	55	125	M10	11
30	574	112	282	180	46	241	268	134	180	M20	18	145	260	220	22	270	90	160	35	70	32	65	140	M12	12
40	640	125	315	200	52	268	296	148	200	M22	20	160	295	250	22	300	100	180	45	90	35	70	160	M14	13
50	721	140	356	225	57	303,5	336	168	225	M24	22	170	325	275	22	340	110	200	50	100	40	80	175	M16	16
60	810	160	400	250	62	343	376	188	250	M27	25	190	360	300	22	380	120	210	55	110	45	90	200	M16	17
70	902	180	442	280	72	379	416	208	280	M30	27	225	415	350	25	430	140	250	70	140	55	110	220	M18	18
80	1015	200	500	315	80	427,5	470	235	315	M33	30	250	455	385	25	490	160	280	75	150	60	120	250	M20	22
90	1145	225	565	355	87	485,5	536	268	355	M36	33	280	535	460	25	560	170	300	85	170	70	140	275	M22	23
100	1280	250	630	400	93	547	614	307	400	M39	36	310	600	520	25	640	200	350	90	180	80	160	310	M24	25
110	1442	280	712	450	100	621	700	350	450	M42	39	375	710	620	25	730	220	390	100	200	85	170	350	M27	26

HELICAL UNITS





PB series double reduction

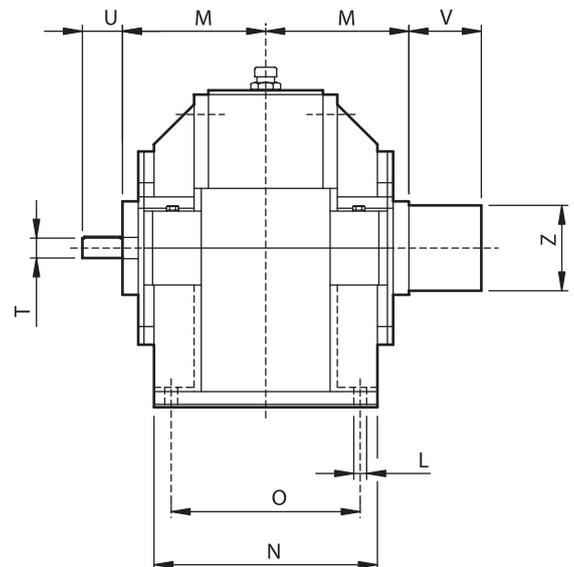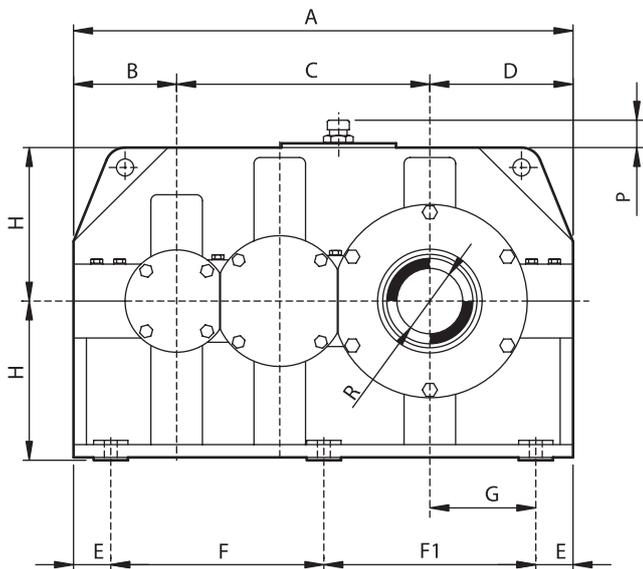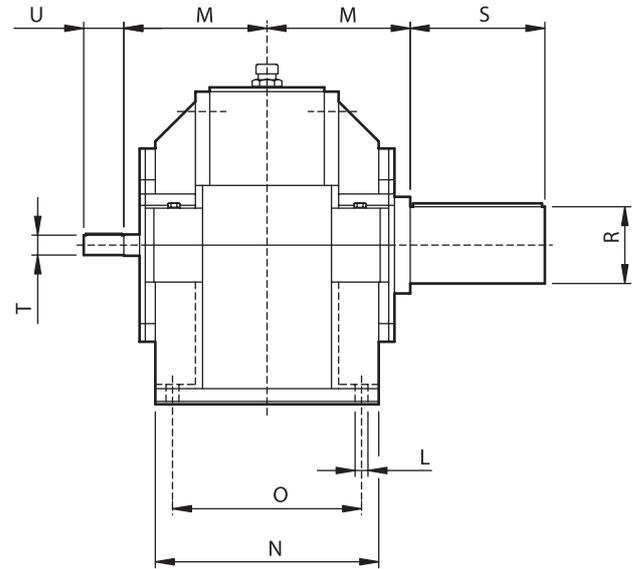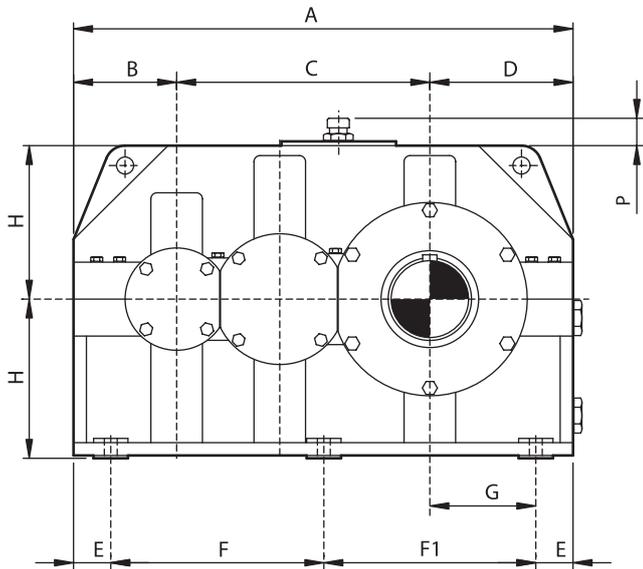

Size	iN 6.3-11.2																	iN 12.5-20				
	A	B	C	D	E	F	F1	G	H	L	M	N	O	P	R	S	T	U	T	U	V	Z
120	1565	315	800	450	110	665	680	340	500	42	420	700	590	33	240	410	130	260	100	200	175	300
130	1739	355	884	500	125	739	750	375	560	45	480	780	660	35	270	470	150	300	110	220	190	340
140	1960	400	1000	560	150	840	820	410	630	48	505	850	720	37	300	500	160	320	130	260	205	380
150	2210	450	1130	630	170	950	920	460	710	52	565	930	790	40	340	550	180	360	140	280	235	420
160	2470	500	1260	710	200	1050	1020	510	800	56	630	1020	870	43	380	630	190	380	160	320	260	460

HELICAL UNITS





PC series triple reduction

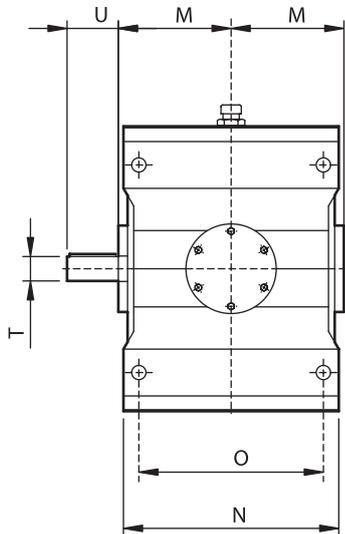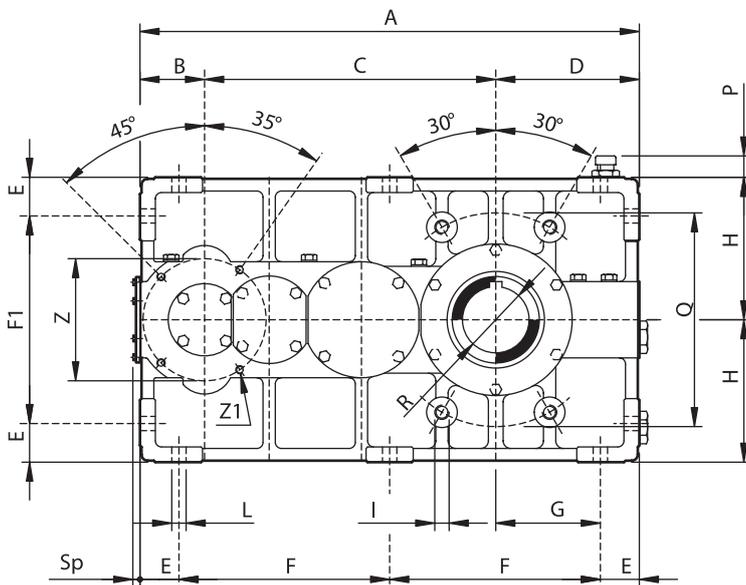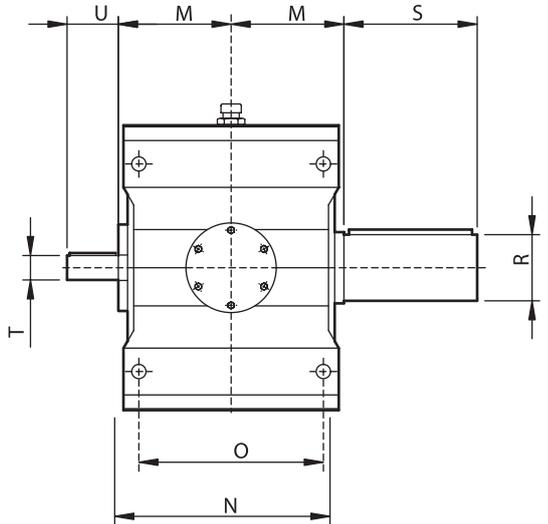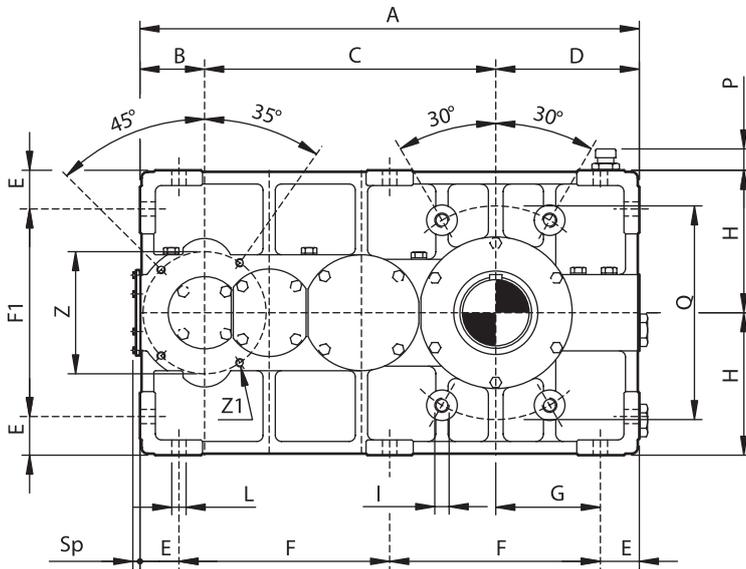

Size	A	B	C	D	E	F	F1	G	H	I	L	M	N	O	P	Q	R	S	T	U	Z	Z1	Sp
10	487	63	284	140	38	205,5	204	102	140	M16	14	115	210	180	20	210	65	110	24	50	120	M8	10
20	550	70	320	160	42	233	236	118	160	M18	16	135	235	200	22	240	80	140	24	50	130	M10	10
30	622	80	362	180	46	265	268	134	180	M20	18	145	260	220	22	270	90	160	28	55	150	M12	11
40	695	90	405	200	52	295,5	296	148	200	M22	20	160	295	250	22	300	100	180	28	55	170	M12	11
50	781	100	456	225	57	333,5	336	168	225	M24	22	170	325	275	22	340	110	200	32	65	185	M12	11
60	874	112	512	250	62	375	376	188	250	M27	25	190	360	300	22	380	120	210	35	70	210	M14	12
70	972	125	567	280	72	414	416	208	280	M30	27	225	415	350	25	430	140	250	45	90	235	M14	13
80	1095	140	640	315	80	467,5	470	235	315	M33	30	250	455	385	25	490	160	280	50	100	260	M16	16
90	1240	160	725	355	87	533	536	268	355	M36	33	280	535	460	25	560	170	300	55	110	290	M16	17
100	1390	180	810	400	93	602	614	307	400	M39	36	310	600	520	25	640	200	350	70	140	320	M18	18
110	1562	200	912	450	100	681	700	350	450	M42	39	375	710	620	25	730	220	390	75	150	350	M18	22

HELICAL UNITS





PC series triple reduction

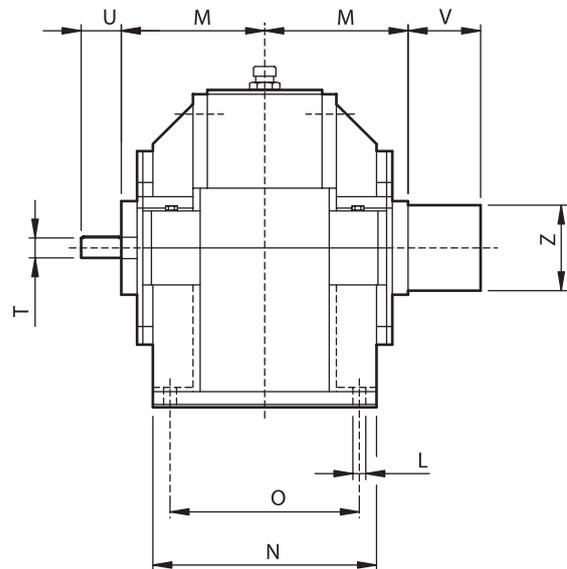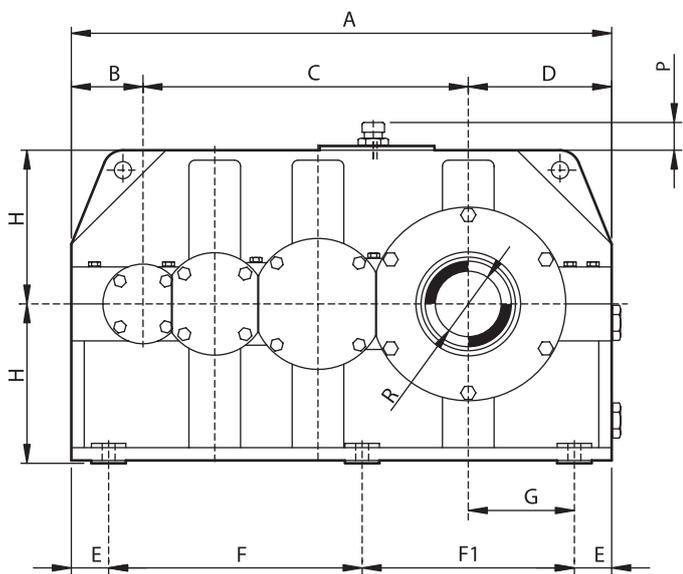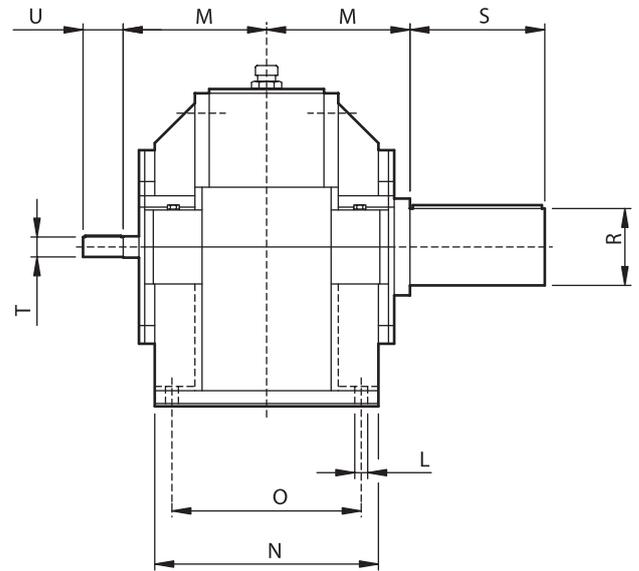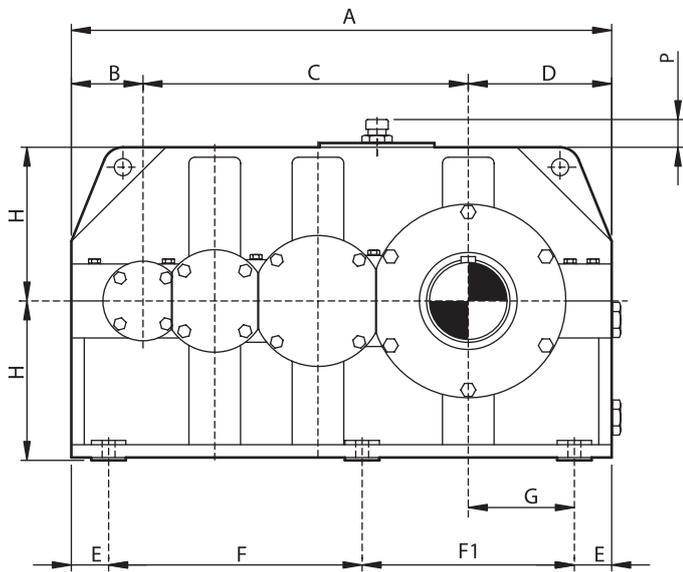

Size	A	B	C	D	E	F	F1	G	H	L	M	N	O	P	R	S	T	U	V	Z
120	1700	225	1025	450	110	800	680	340	500	42	420	700	590	33	240	410	85	170	175	300
130	1884	250	1134	500	125	884	750	375	560	45	480	780	660	35	270	470	90	180	190	340
140	2120	280	1280	560	150	1000	820	410	630	48	505	850	720	37	300	500	100	200	205	380
150	2395	315	1450	630	170	1135	920	460	710	52	565	930	790	40	340	550	130	260	235	420
160	2685	355	1620	710	200	1265	1020	510	800	56	630	1020	870	43	380	630	150	300	260	460

HELICAL UNITS



PD series quadruple reduction

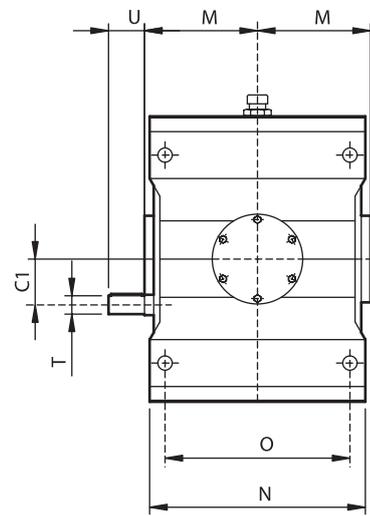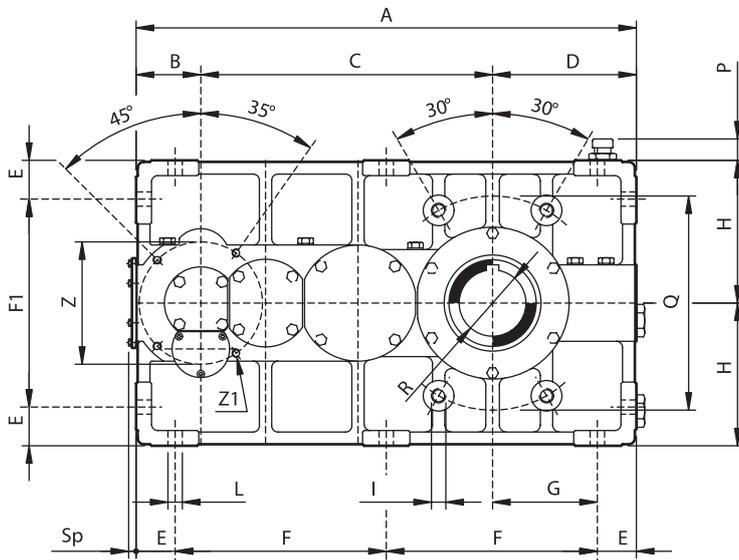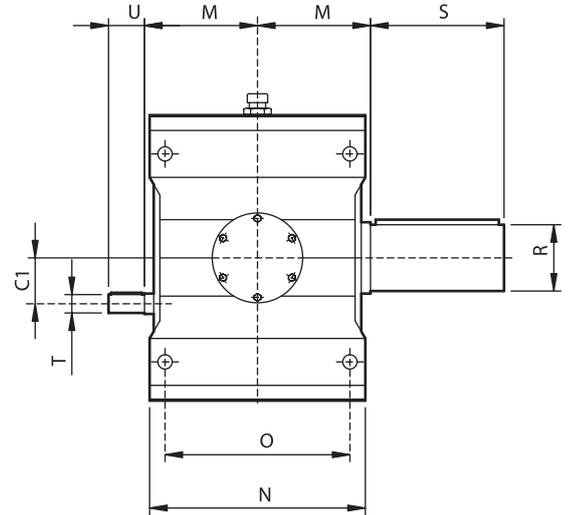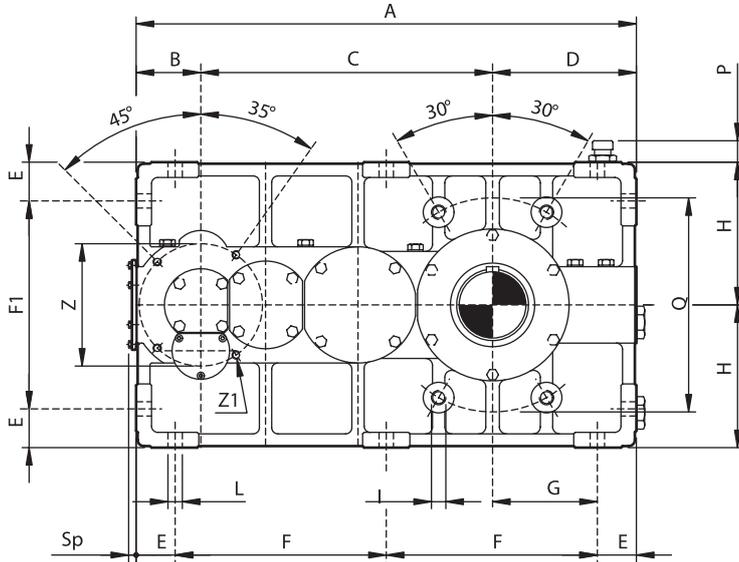

Size	A	B	C	C1	D	E	F	F1	G	H	I	L	M	N	O	P	Q	R	S	T	U	Z	Z1	Sp
10	487	63	284	45	140	38	205,5	204	102	140	M16	14	115	210	180	20	210	65	110	18	35	120	M8	10
20	550	70	320	50	160	42	233	236	118	160	M18	16	135	235	200	22	240	80	140	18	35	130	M10	10
30	622	80	362	56	180	46	265	268	134	180	M20	18	145	260	220	22	270	90	160	24	50	150	M12	11
40	695	90	405	63	200	52	295,5	296	148	200	M22	20	160	295	250	22	300	100	180	24	50	170	M12	11
50	781	100	456	70	225	57	333,5	336	168	225	M24	22	170	325	275	22	340	110	200	24	50	185	M12	11
60	874	112	512	80	250	62	375	376	188	250	M27	25	190	360	300	22	380	120	210	28	55	210	M14	12
70	972	125	567	90	280	72	414	416	208	280	M30	27	225	415	350	25	430	140	250	28	55	235	M14	13
80	1095	140	640	100	315	80	467,5	470	235	315	M33	30	250	455	385	25	490	160	280	32	65	260	M16	16
90	1240	160	725	112	355	87	533	536	268	355	M36	33	280	535	460	25	560	170	300	35	70	290	M16	17
100	1390	180	810	125	400	93	602	614	307	400	M39	36	310	600	520	25	640	200	350	45	90	320	M18	18
110	1562	200	912	140	450	100	681	700	350	450	M42	39	375	710	620	25	730	220	390	50	100	350	M18	22

HELICAL UNITS


PD series quadruple reduction

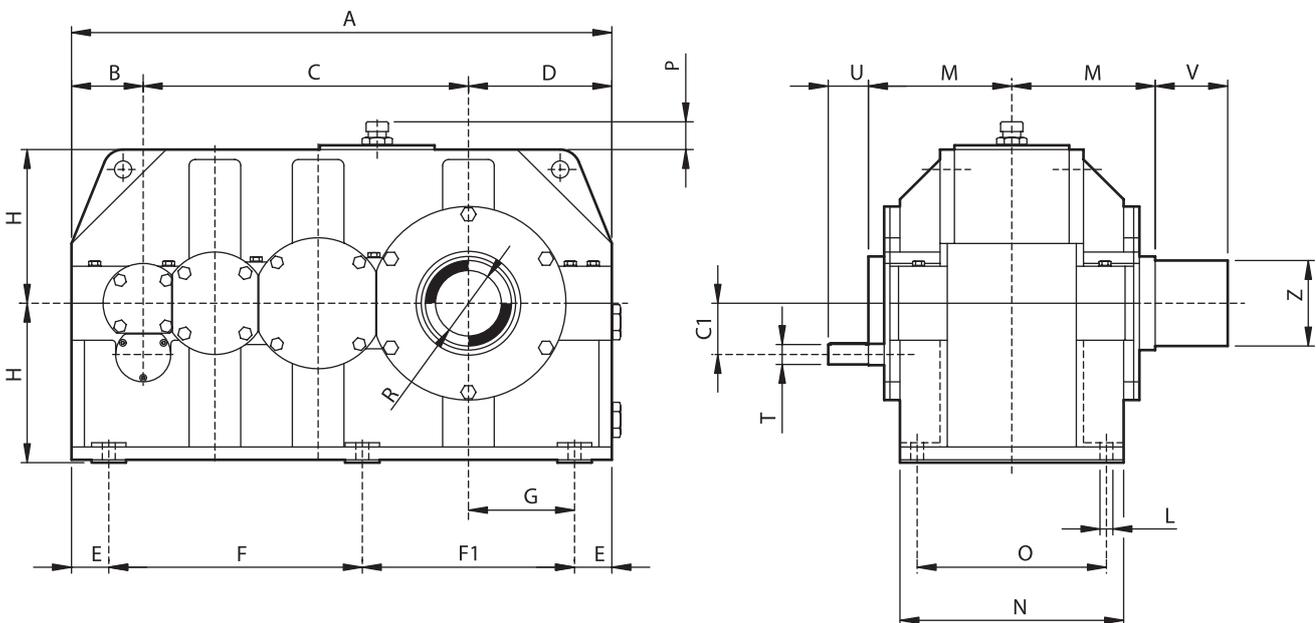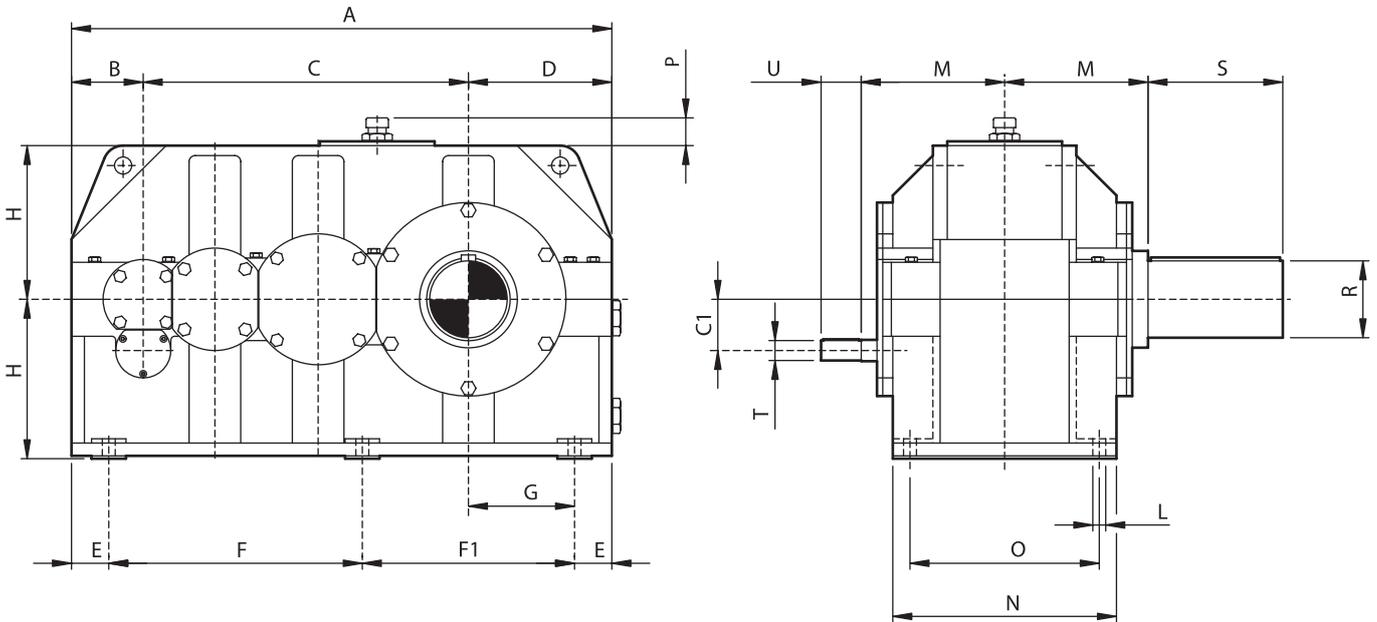

Size	A	B	C	C1	D	E	F	F1	G	H	L	M	N	O	P	R	S	T	U	V	Z
120	1700	225	1025	160	450	110	800	680	340	500	42	420	700	590	33	240	410	55	110	175	300
130	1884	250	1134	180	500	125	884	750	375	560	45	480	780	660	35	270	470	70	140	190	340
140	2120	280	1280	200	560	150	1000	820	410	630	48	505	850	720	37	300	500	75	150	205	380
150	2395	315	1450	225	630	170	1135	920	460	710	52	565	930	790	40	340	550	85	170	235	420
160	2685	355	1620	250	710	200	1265	1020	510	800	56	630	1020	870	43	380	630	90	180	260	460

BEVEL-HELICAL UNITS





RHB series double reduction

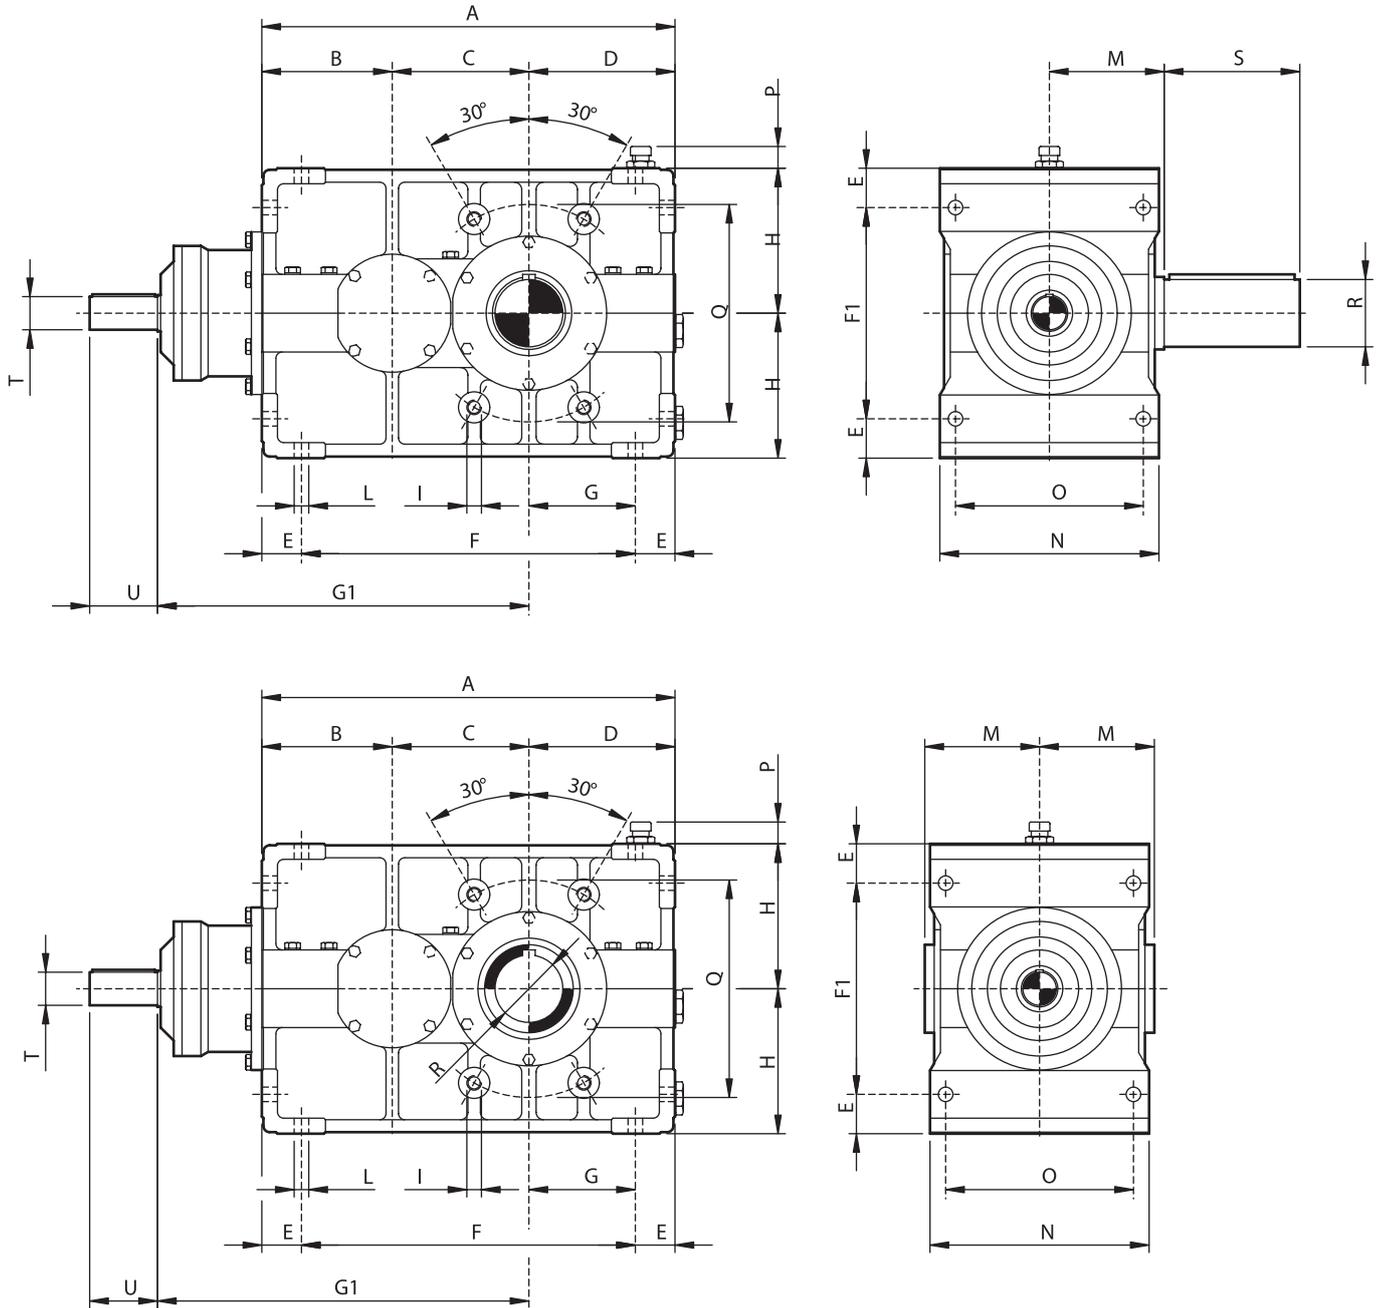

	iN 5-11.2																	iN 12.5-18					
Size	A	B	C	D	E	F	F1	G	G1	H	I	L	M	N	O	P	Q	R	S	T	U	T	U
10	396	125	131	140	38	320	204	102	356	140	M16	14	115	210	180	20	210	65	110	35	70	32	65
20	450	140	150	160	42	366	236	118	400	160	M18	16	135	235	200	22	240	80	140	40	80	35	70
30	510	160	170	180	46	418	268	134	450	180	M20	18	145	260	220	22	270	90	160	45	90	40	80
40	570	180	190	200	52	466	296	148	505	200	M22	20	160	295	250	22	300	100	180	50	100	45	90
50	641	200	216	225	57	527	336	168	571	225	M24	22	170	325	275	22	340	110	200	55	110	50	100
60	715	225	240	250	62	591	376	188	640	250	M27	25	190	360	300	22	380	120	210	60	120	55	110
70	792	250	262	280	72	648	416	208	712	280	M30	27	225	415	350	25	430	140	250	70	140	60	120
80	895	280	300	315	80	735	470	235	800	315	M33	30	250	455	385	25	490	160	280	80	160	70	140
90	1010	315	340	355	87	836	536	268	900	355	M36	33	280	535	460	25	560	170	300	90	180	80	160
100	1135	355	380	400	93	949	614	307	1010	400	M39	36	310	600	520	25	640	200	350	100	200	90	180
110	1282	400	432	450	100	1082	700	350	1142	450	M42	39	375	710	620	25	730	220	390	110	220	100	200

BEVEL-HELICAL UNITS


RVB series double reduction

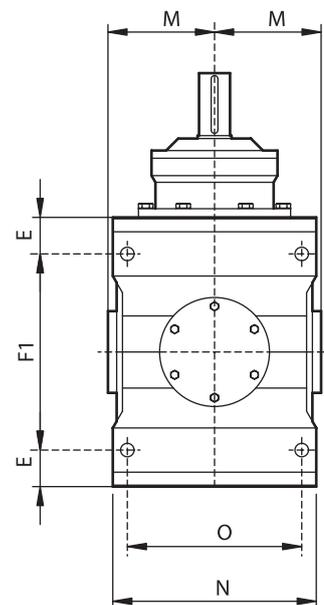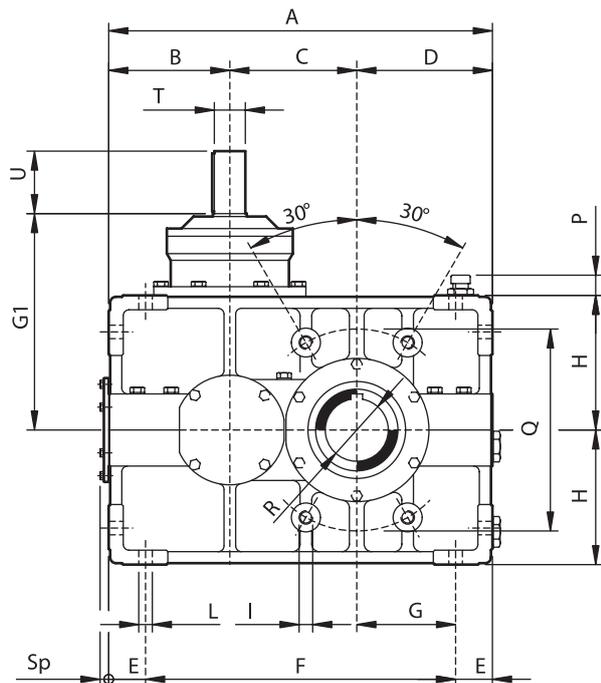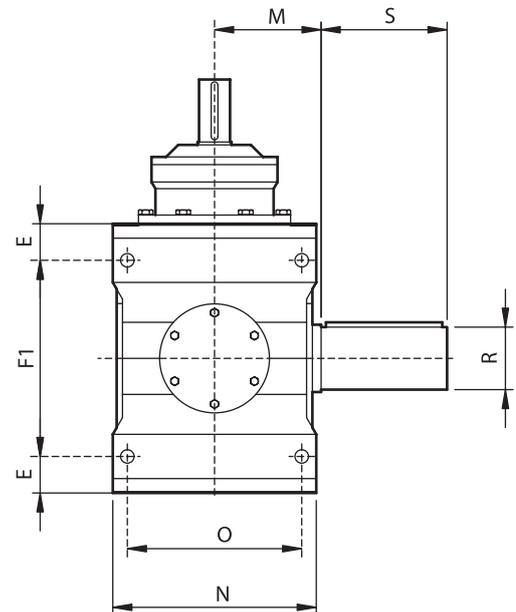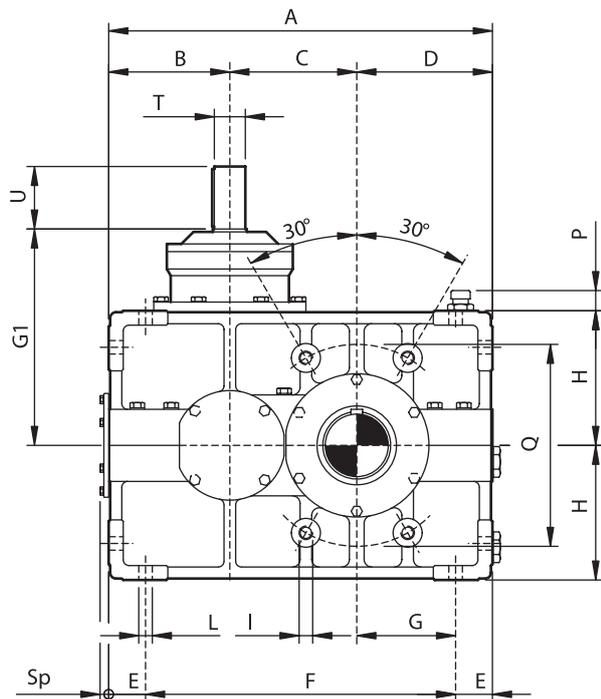

Size	iN 5-11.2																			iN 12.5-18				
	A	B	C	D	E	F	F1	G	G1	H	I	L	M	N	O	P	Q	R	S	T	U	T	U	Sp
10	396	125	131	140	38	320	204	102	225	140	M16	14	115	210	180	20	210	65	110	35	70	32	65	13
20	450	140	150	160	42	366	236	1118	250	160	M18	16	135	235	200	22	240	80	140	40	80	35	70	16
30	510	160	170	180	46	418	268	134	280	180	M20	18	145	260	220	22	270	90	160	45	90	40	80	17
40	570	180	190	200	52	466	296	148	315	200	M22	20	160	295	250	22	300	100	180	50	100	45	90	18
50	641	200	216	225	57	527	336	168	355	225	M24	22	170	325	275	22	340	110	200	55	110	50	100	22
60	715	225	240	250	62	591	376	188	400	250	M27	25	190	360	300	22	380	120	210	60	120	55	110	23
70	792	250	262	280	72	648	416	208	450	280	M30	27	225	415	350	25	430	140	250	70	140	60	120	25
80	895	280	300	315	80	735	470	235	500	315	M33	30	250	455	385	25	490	160	280	80	160	70	140	26
90	1010	315	340	355	87	836	536	268	560	355	M36	33	280	535	460	25	560	170	300	90	180	80	160	29
100	1135	355	380	400	93	949	614	307	630	400	M39	36	310	600	520	25	640	200	350	100	200	90	180	30
110	1282	400	432	450	100	1082	700	350	710	450	M42	39	375	710	620	25	730	220	390	110	220	100	200	32

BEVEL-HELICAL UNITS



RHC series triple reduction

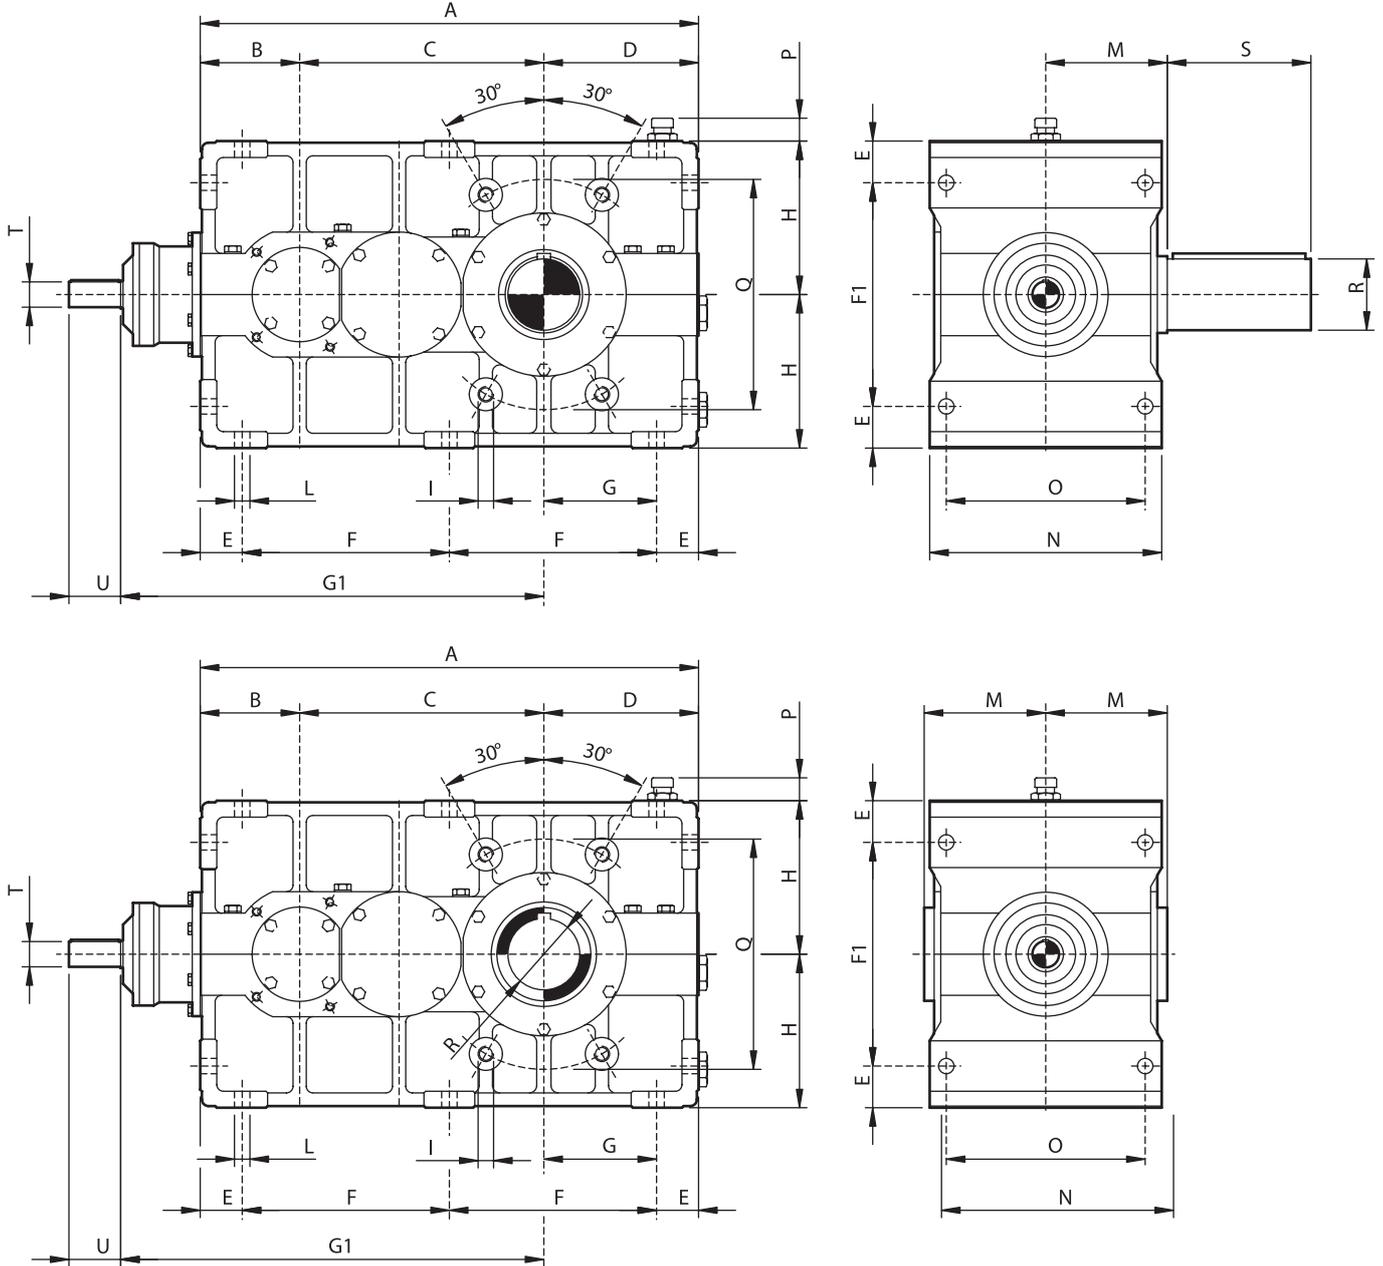

Size	iN 20-45																			iN 50-71			
	A	B	C	D	E	F	F1	G	G1	H	I	L	M	N	O	P	Q	R	S	T	U	T	U
10	451	90	221	140	38	187,5	204	102	381	140	M16	14	115	210	180	20	210	65	110	24	50	22	45
20	510	100	250	160	42	213	236	118	430	160	M18	16	135	235	200	22	240	80	140	28	55	24	50
30	574	112	282	180	46	241	268	134	482	180	M20	18	145	260	220	22	270	90	160	32	65	28	55
40	640	125	315	200	52	268	296	148	540	200	M22	20	160	295	250	22	300	100	180	35	70	32	65
50	721	140	356	225	57	303,5	336	168	606	225	M24	22	170	325	275	22	340	110	200	40	80	35	70
60	810	160	400	250	62	343	376	188	680	250	M27	25	190	360	300	22	380	120	210	45	90	40	80
70	902	180	442	280	72	379	416	208	757	280	M30	27	225	415	350	25	430	140	250	50	100	45	90
80	1015	200	500	315	80	427,5	470	235	855	315	M33	30	250	455	385	25	490	160	280	55	110	50	100
90	1145	225	565	355	87	485,5	536	268	965	355	M36	33	280	535	460	25	560	170	300	60	120	55	110
100	1280	250	630	400	93	547	614	307	1080	400	M39	36	310	600	520	25	640	200	350	70	140	60	120
110	1442	280	712	450	100	621	700	350	1212	450	M42	39	375	710	620	25	730	220	390	80	160	70	140

BEVEL-HELICAL UNITS





RHC series triple reduction

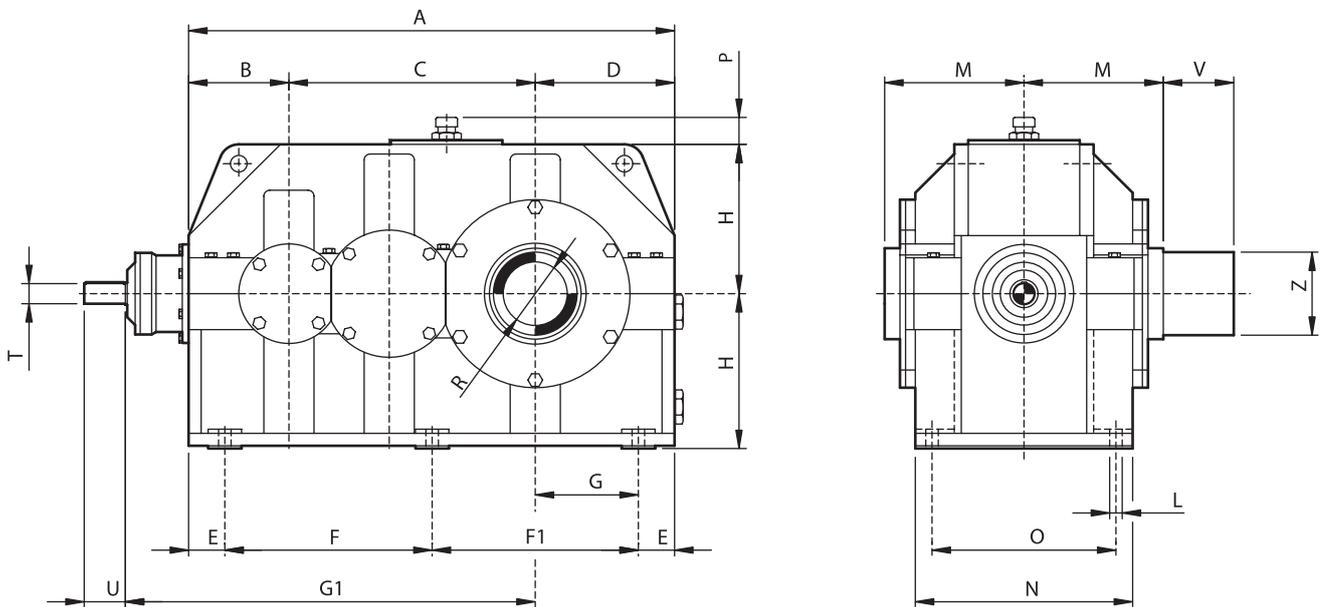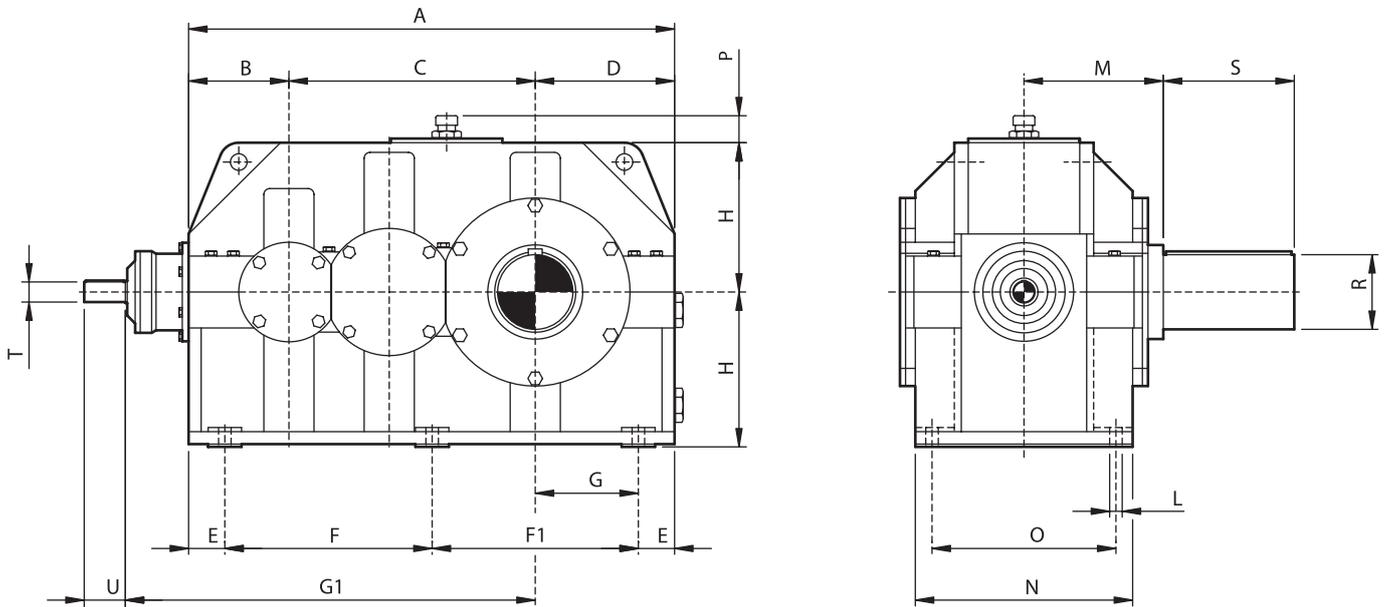

Size	iN 20-45																	iN 50-71					
	A	B	C	D	E	F	F1	G	G1	H	L	M	N	O	P	R	S	T	U	T	U	V	Z
120	1565	315	800	450	110	665	680	340	1360	500	42	420	700	590	33	240	410	90	180	80	160	175	300
130	1739	355	884	500	125	739	750	375	1514	560	45	480	780	660	35	270	470	100	200	90	180	190	340
140	1960	400	1000	560	150	840	820	410	1710	630	48	505	850	720	37	300	500	110	220	100	200	205	380

BEVEL-HELICAL UNITS



RVC series triple reduction

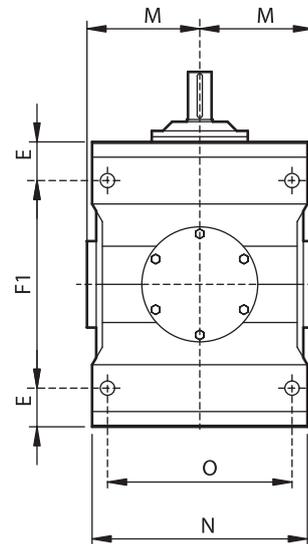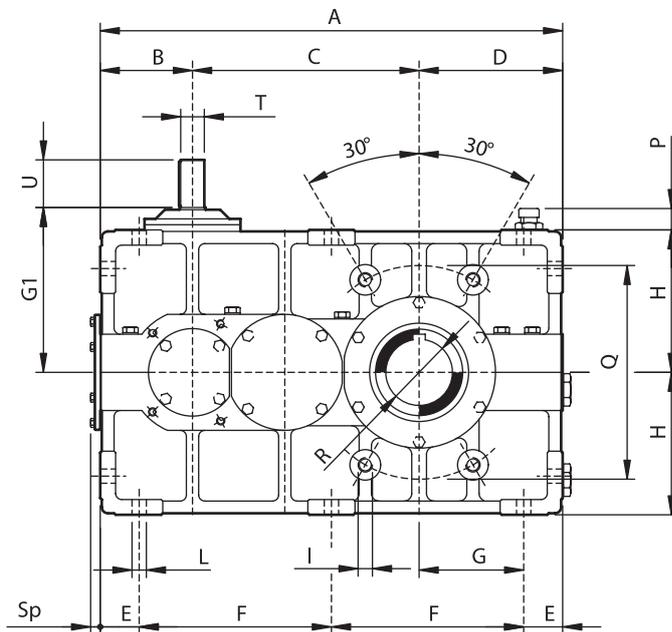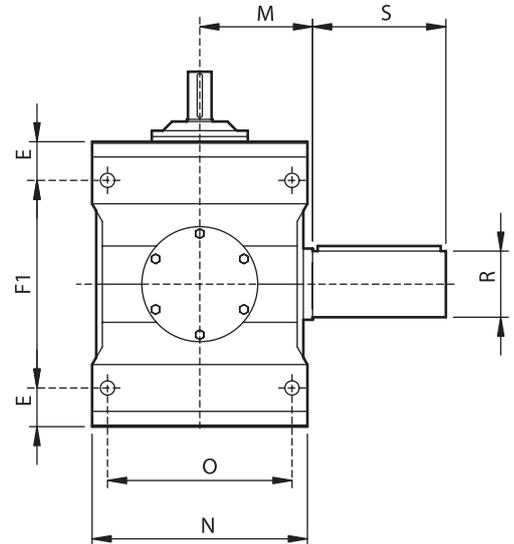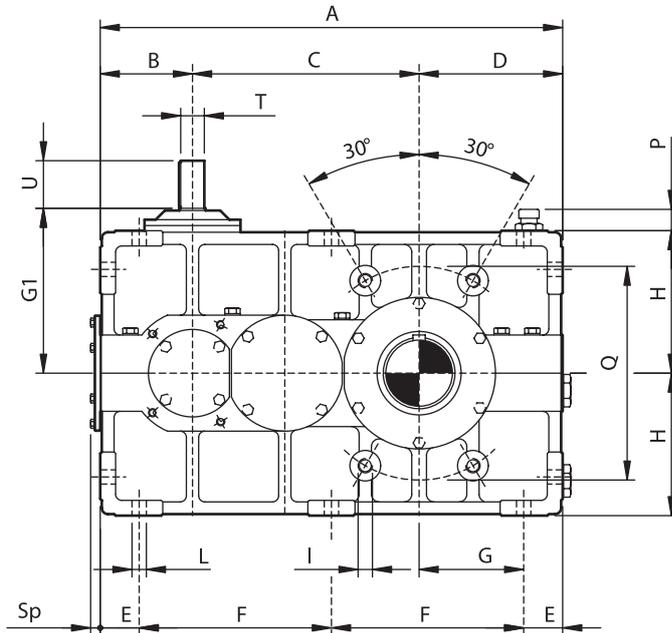

Size																	iN 20-45		iN 50-71		Sp			
	A	B	C	D	E	F	F1	G	G1	H	I	L	M	N	O	P	Q	R	S	T		U	T	U
10	451	90	221	140	38	187,5	204	102	160	140	M16	14	115	210	180	20	210	65	110	24	50	22	45	11
20	510	100	250	160	42	213	236	118	180	160	M18	16	135	235	200	22	240	80	140	28	55	24	50	11
30	574	112	282	180	46	241	268	134	200	180	M20	18	145	260	220	22	270	90	160	32	65	28	55	12
40	640	125	315	200	52	268	296	148	225	200	M22	20	160	295	250	22	300	100	180	35	70	32	65	13
50	721	140	356	225	57	303,5	336	168	250	225	M24	22	170	325	275	22	340	110	200	40	80	35	70	16
60	810	160	400	250	62	343	376	188	280	250	M27	25	190	360	300	22	380	120	210	45	90	40	80	17
70	902	180	442	280	72	379	416	208	315	280	M30	27	225	415	350	25	430	140	250	50	100	45	90	18
80	1015	200	500	315	80	427,5	470	235	355	315	M33	30	250	455	385	25	490	160	280	55	110	50	100	22
90	1145	225	565	355	87	485,5	536	268	400	355	M36	33	280	535	460	25	560	170	300	60	120	55	110	23
100	1280	250	630	400	93	547	614	307	450	400	M39	36	310	600	520	25	640	200	350	70	140	60	120	25
110	1442	280	712	450	100	621	700	350	500	450	M42	39	375	710	620	25	730	220	390	80	160	70	140	26

BEVEL-HELICAL UNITS





RHD series quadruple reduction

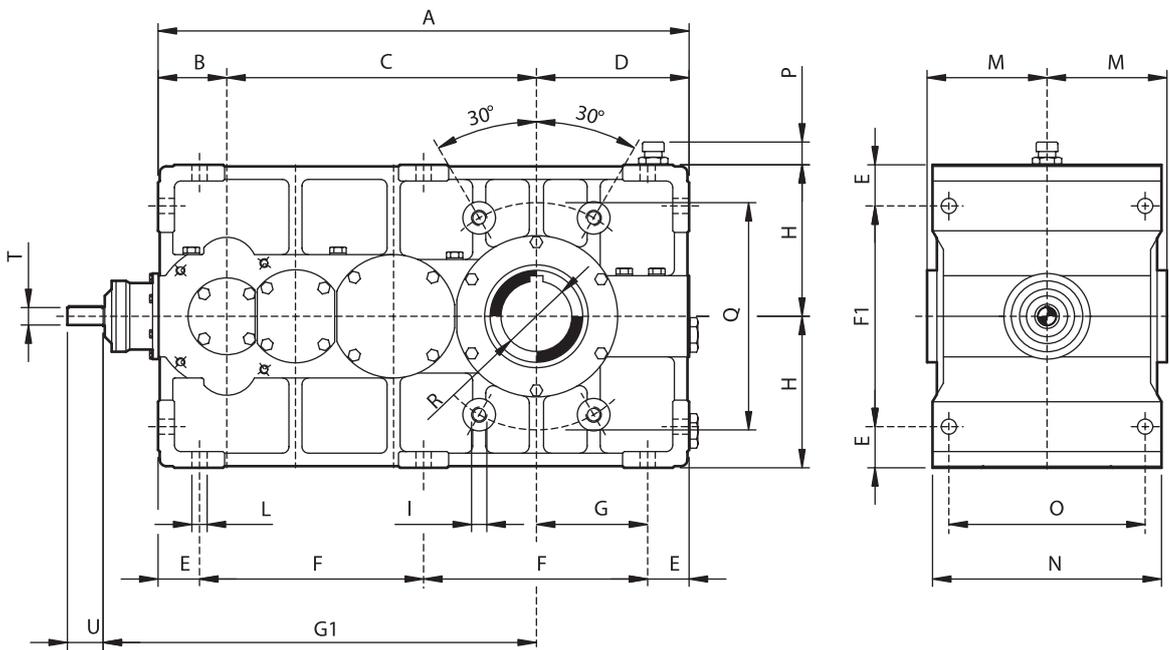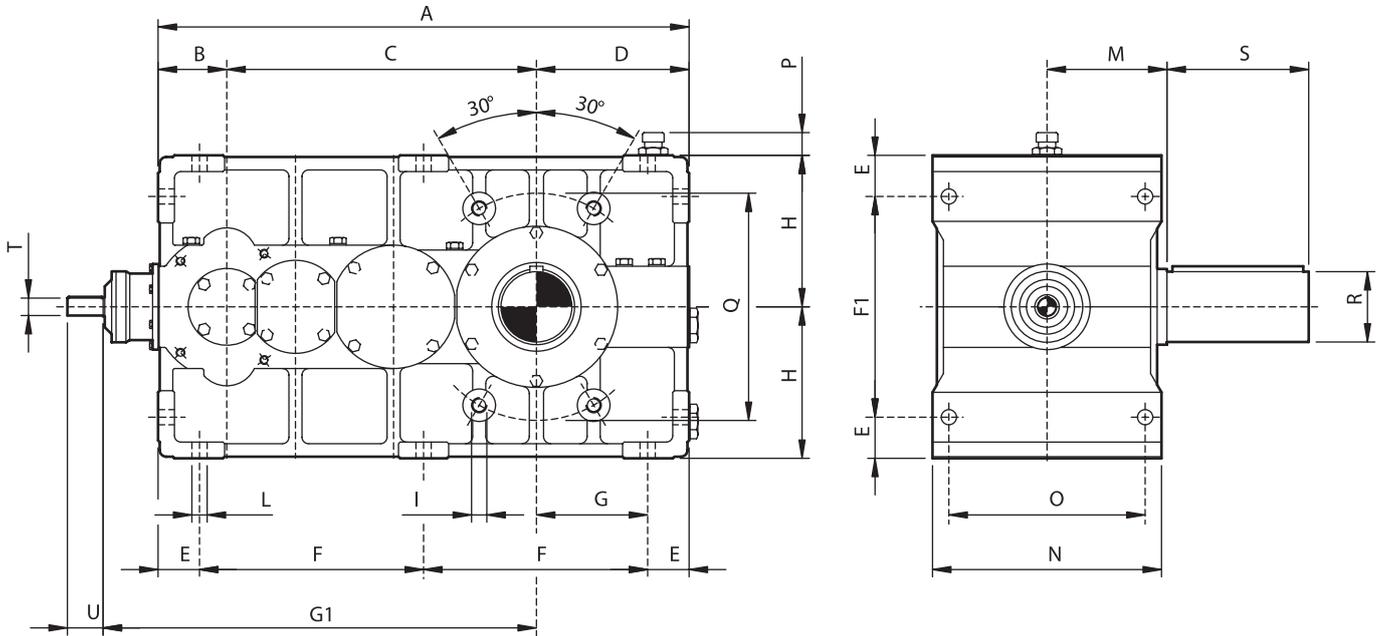

Size	in 80-225																	in 250-355					
	A	B	C	D	E	F	F1	G	G1	H	I	L	M	N	O	P	Q	R	S	T	U	T	U
10	487	63	284	140	38	205,5	204	102	396	140	M16	14	115	210	180	20	210	65	110	20	40	20	40
20	550	70	320	160	42	233	236	118	445	160	M18	16	135	235	200	22	240	80	140	20	40	20	40
30	622	80	362	180	46	265	268	134	502	180	M20	18	145	260	220	22	270	90	160	22	45	20	40
40	695	90	405	200	52	295,5	296	148	565	200	M22	20	160	295	250	22	300	100	180	24	50	22	45
50	781	100	456	225	57	333,5	336	168	636	225	M24	22	170	325	275	22	340	110	200	28	55	24	50
60	874	112	512	250	62	375	376	188	712	250	M27	25	190	360	300	22	380	120	210	32	65	28	55
70	972	125	567	280	72	414	416	208	792	280	M30	27	225	415	350	25	430	140	250	35	70	32	65
80	1095	140	640	315	80	467,5	470	235	890	315	M33	30	250	455	385	25	490	160	280	40	80	35	70
90	1240	160	725	355	87	533	536	268	1005	355	M36	33	280	535	460	25	560	170	300	45	90	40	80
100	1390	180	810	400	93	602	614	307	1125	400	M39	36	310	600	520	25	640	200	350	50	100	45	90
110	1562	200	912	450	100	681	700	350	1247	450	M42	39	375	710	620	25	730	220	390	55	110	50	100

BEVEL-HELICAL UNITS





RHD series quadruple reduction

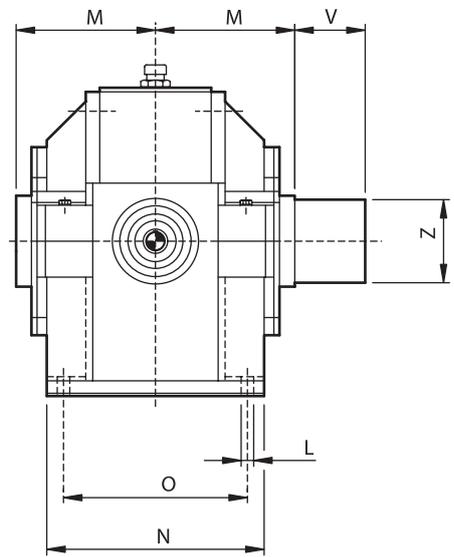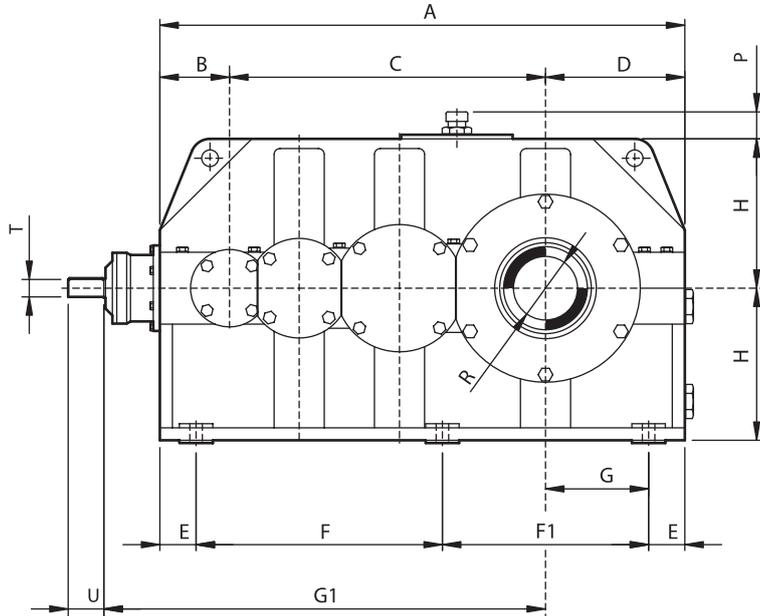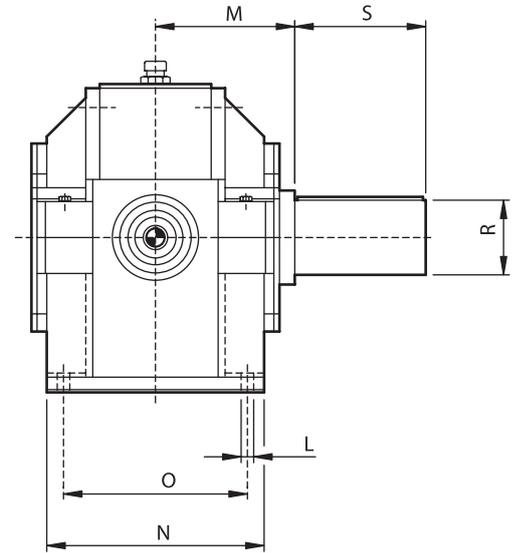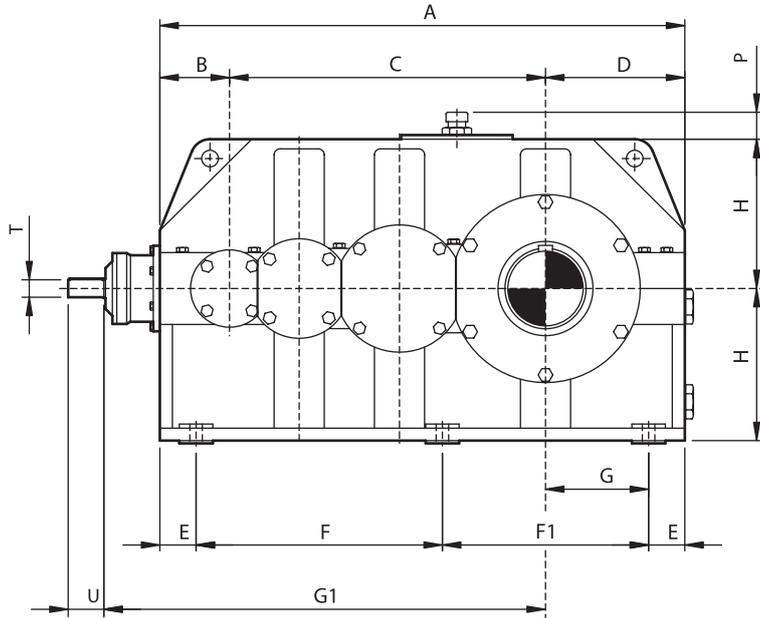

Size	iN 80-225																	iN 250-355					
	A	B	C	D	E	F	F1	G	G1	H	L	M	N	O	P	R	S	T	U	T	U	V	Z
120	1700	225	1025	450	110	800	680	340	1425	500	42	420	700	590	33	240	410	60	120	55	110	175	300
130	1884	250	1134	500	125	884	750	375	1584	560	45	480	780	660	35	270	470	70	140	60	120	190	340
140	2120	280	1280	560	150	1000	820	410	1780	630	48	505	850	720	37	300	500	80	160	70	140	205	380
150	2395	315	1450	630	170	1135	920	460	2010	710	52	565	930	790	40	340	550	90	180	80	160	235	420
160	2685	355	1620	710	200	1265	1020	510	2250	800	56	630	1020	870	43	380	630	100	200	90	180	260	460

BEVEL-HELICAL UNITS

RVD series quadruple reduction

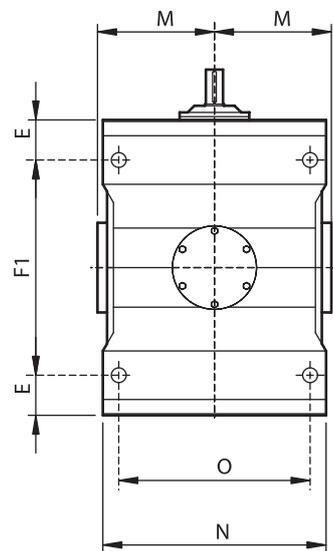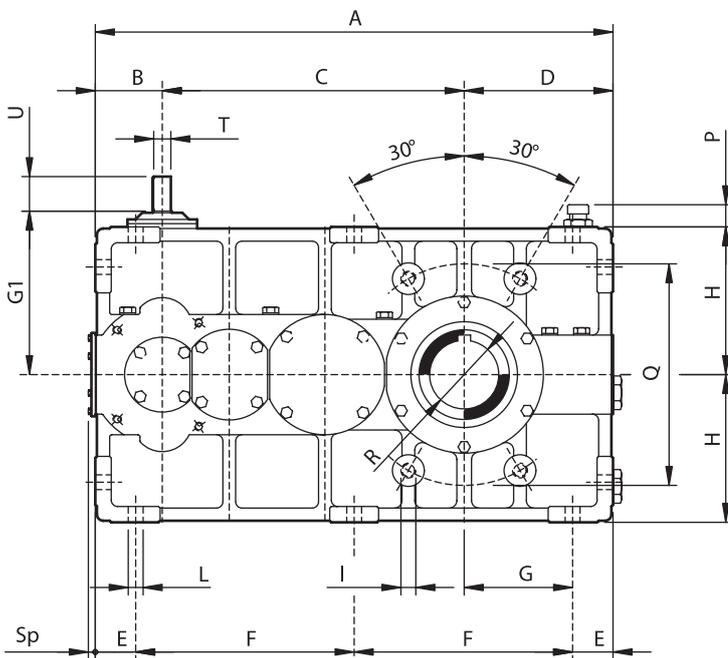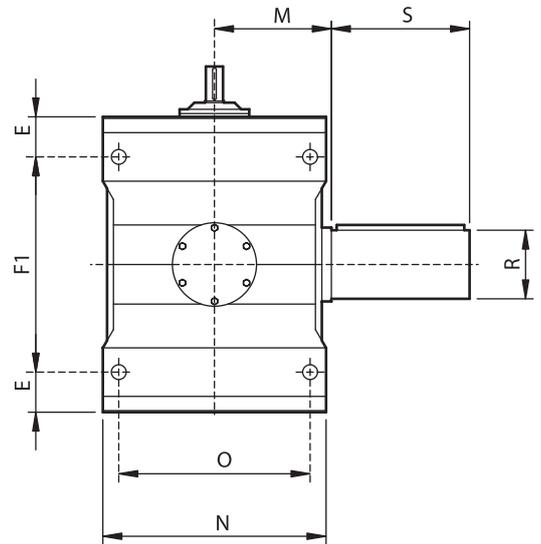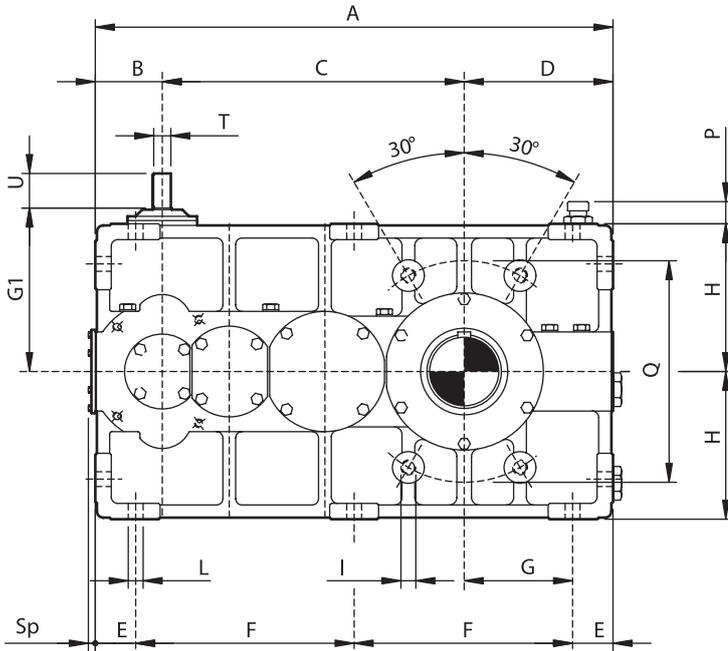

Size	in 80-225																	in 250-355						
	A	B	C	D	E	F	F1	G	G1	H	I	L	M	N	O	P	Q	R	S	T	U	T	U	Sp
10	487	63	284	140	38	205,5	204	102	160	140	M16	14	115	210	180	20	210	65	110	20	40	20	40	10
20	550	70	320	160	42	233	236	118	180	160	M18	16	135	235	200	22	240	80	140	20	40	20	40	10
30	622	80	362	180	46	265	268	134	200	180	M20	18	145	260	220	22	270	90	160	22	45	20	40	11
40	695	90	405	200	52	295,5	296	148	225	200	M22	20	160	295	250	22	300	100	180	24	50	22	45	11
50	781	100	456	225	57	333,5	336	168	250	225	M24	22	170	325	275	22	340	110	200	28	55	24	50	11
60	874	112	512	250	62	375	376	188	280	250	M27	25	190	360	300	22	380	120	210	32	65	28	55	12
70	972	125	567	280	72	414	416	208	315	280	M30	27	225	415	350	25	430	140	250	35	70	32	65	13
80	1095	140	640	315	80	467,5	470	235	355	315	M33	30	250	455	385	25	490	160	280	40	80	35	70	16
90	1240	160	725	355	87	533	536	268	400	355	M36	33	280	535	460	25	560	170	300	45	90	40	80	17
100	1390	180	810	400	93	602	614	307	450	400	M39	36	310	600	520	25	640	200	350	50	100	45	90	18
110	1562	200	912	450	100	681	700	350	500	450	M42	39	375	710	620	25	730	220	390	55	110	50	100	22

SHAFT ARRANGEMENT

<p>PA - PC</p>	
<p>PB - PD</p>	
<p>RH - RV</p>	

MOUNTING POSITION

<p>P</p>	
<p>RH</p>	
<p>RV</p>	

▼ Breather plug

● Level plug

▲ Drain plug

P Series - Helical units - Actual ratios

PA	i _N	Size															
		10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
1.12 1.25 1.4	1.118	1.118	1.147	1.147	1.111	1.139	1.118	1.118	1.147	1.147	1.111	1.118	1.118	1.147	1.147	1.111	1.118
	1.25	1.25	1.281	1.281	1.235	1.265	1.25	1.25	1.281	1.281	1.235	1.25	1.25	1.281	1.281	1.235	1.25
	1.4	1.4	1.433	1.433	1.375	1.406	1.4	1.4	1.433	1.433	1.375	1.4	1.4	1.433	1.433	1.375	1.4
1.6 1.8 2	1.571	1.571	1.607	1.607	1.621	1.567	1.571	1.571	1.607	1.607	1.621	1.567	1.571	1.571	1.607	1.607	1.621
	1.769	1.769	1.808	1.808	1.815	1.75	1.769	1.769	1.808	1.808	1.815	1.75	1.769	1.769	1.808	1.808	1.815
	2	2	2.042	2.042	2.04	1.962	2	2	2.042	2.042	2.04	1.962	2	2	2.042	2.042	2.04
2.25 2.5 2.8	2.273	2.273	2.318	2.318	2.3	2.208	2.273	2.273	2.318	2.318	2.3	2.208	2.273	2.273	2.318	2.318	2.3
	2.429	2.429	2.476	2.476	2.455	2.5	2.429	2.429	2.476	2.476	2.455	2.5	2.429	2.429	2.476	2.476	2.455
	2.789	2.789	2.842	2.842	2.8	2.85	2.789	2.789	2.842	2.842	2.8	2.85	2.789	2.789	2.842	2.842	2.8
3.15 3.55 4	3.235	3.235	3.056	3.056	3.222	3.053	3.235	3.235	3.056	3.056	3.222	3.053	3.235	3.235	3.056	3.056	3.222
	3.5	3.5	3.563	3.563	3.471	3.529	3.5	3.5	3.563	3.563	3.471	3.529	3.5	3.5	3.563	3.563	3.471
	4.143	4.143	3.867	3.867	4.067	4.133	4.143	4.143	3.867	3.867	4.067	4.133	4.143	4.143	3.867	3.867	4.067
4.5 5 5.6	4.538	4.538	4.615	4.615	4.429	4.5	4.538	4.538	4.615	4.615	4.429	4.5	4.538	4.538	4.615	4.615	4.429
	5	5	5.083	5.083	4.846	4.923	5	5	5.083	5.083	4.846	4.923	5	5	5.083	5.083	4.846
	5.545	5.545	5.636	5.636	5.909	5.417	5.545	5.545	5.636	5.636	5.909	5.417	5.545	5.545	5.636	5.636	5.909

PB 6.3 7.1 8	6.321	6.484	6.154	6.429	6.397	6.268	6.321	6.484	6.154	6.429	6.397	6.268	6.321	6.484	6.154	6.429
	7.157	6.892	6.923	7.278	7.263	7.096	7.157	6.892	6.923	7.278	7.263	7.096	7.157	6.892	6.923	7.278
	8.131	7.806	7.811	7.754	7.75	8.063	8.131	7.806	7.811	7.754	7.75	8.063	8.131	7.806	7.811	7.754
9 10 11.2	9.283	8.88	8.846	8.829	8.857	9.205	9.283	8.88	8.846	8.829	8.857	9.205	9.283	8.88	8.846	8.829
	9.941	10.158	10.170	10.110	9.949	9.857	9.941	10.158	10.070	10.110	10.186	9.857	9.941	10.158	10.070	10.110
	11.466	10.892	11.538	10.846	10.955	11.368	11.466	10.392	11.538	10.846	10.955	11.368	11.466	10.392	11.538	10.846
12.5 14 16	12.355	12.607	12.389	12.564	12.765	12.25	12.355	12.607	12.389	12.564	12.765	12.25	12.355	12.607	12.389	12.564
	14.466	13.615	14.389	13.575	13.839	14.344	14.466	13.615	14.389	13.575	13.839	14.344	14.466	13.615	14.389	13.575
	15.733	16.036	15.577	16	16.449	15.6	15.733	16.036	15.577	16	16.449	15.6	15.733	16.036	15.577	16
18 20 22.5	17.181	17.505	18.462	17.473	18.055	18.692	17.181	17.505	18.462	17.473	18.055	18.682	17.181	17.505	18.462	17.473
	20.801	19.201	20.237	19.172	19.929	20.625	20.801	19.201	20.237	19.172	19.929	20.625	20.801	19.201	20.237	19.172
			22.308			22.909	23.105	23.517	22.308	23.497	22.909	23.105	23.517			23.497
25 28 31.5																24.8

PC 18 20 22.5	22.751	22.503	23.137	22.42													22.984
	25.655	25.415	24.399	24.566	25.243	24.492	25.655	25.415	24.399	24.566	25.243	24.492	25.655	25.415	24.399	24.566	25.243
	27.257	28.744	27.513	27.719	28.469	27.5	27.257	28.744	27.513	27.719	28.469	27.5	27.257	28.744	27.513	27.719	28.469
25 28 31.5	30.817	30.593	31.071	31.339	30.262	30.938	30.817	32.584	31.071	31.339	32.192	30.938	30.817	32.584	31.071	31.339	32.192
	34.946	34.734	35.178	35.538	34.277	34.904	34.946	34.734	35.178	35.538	34.277	34.904	34.946	34.734	35.178	35.538	34.277
	39.794	39.596	39.968	40.468	38.991	39.531	39.794	39.596	39.968	40.468	38.991	39.531	39.794	39.596	39.968	40.468	38.991
35.5 40 45	45.565	45.385	45.629	46.337	44.602	45	45.565	45.385	45.629	46.337	44.602	45	45.565	45.385	45.629	46.337	44.602
	48.883	48.713	48.864	49.712	51.395	51.563	48.883	48.713	48.864	49.712	51.395	51.563	48.883	48.713	48.864	49.712	51.395
	56.626	56.479	56.356	57.585	55.357	55.362	56.626	56.479	56.356	57.585	55.357	55.362	56.626	56.479	56.356	57.585	55.357
50 56 63	61.18	61.047	60.726	62.217	64.768	64.301	61.18	61.047	60.726	62.217	64.768	64.301	61.18	61.047	60.726	62.217	64.768
	72.111	72.01	71.106	73.333	70.414	69.609	72.111	72.01	71.106	73.333	70.414	69.609	72.111	72.01	71.106	73.333	70.414
	78.748	78.667	77.333	80.082	76.867	82.5	78.748	78.667	77.333	80.082	76.867	82.5	78.748	78.667	77.333	80.082	76.867
71 80 90	86.405	86.347	92.663	87.87	93	90.433	86.405	86.347	92.663	87.87	93	90.433	86.405	86.347	92.663	87.87	93
	95.339	95.308	102.24	96.955		99.688	95.339	105.9	102.24	96.955	103.27	99.688	95.34	105.9	102.24	96.955	
	100 112 125																


PD 100 112 125				98.813													
	110.01	114.93	114.64	112.59	111.6	115.77	110.72	113.75	114.64	112.59	111.6	115.77	110.72	113.75	114.64	112.59	111.6
	127.12	128.07	128.63	127.04	126.21	12295	124.93	128.17	121.41	127.04	126.21	12295	124.93	128.17	121.41	127.04	126.21
140 160 180	140.2	142.96	136.32	143.64	143.08	138.85	141.24	136.15	136.32	143.64	143.08	138.85	141.24	136.15	136.32	143.64	143.08
	163	159.98	162.83	162.88	162.75	157.2	160.17	163.93	162.83	162.88	162.75	157.2	160.17	163.93	162.83	162.88	162.75
	180.82	179.62	184.04	185.48	186	178.61	182.39	174.73	184.04	185.48	186	178.61	182.39	174.73	184.04	185.48	186
200 225 250	201.27	202.53	195.97	198.32	199.29	203.91	208.84	199.28	195.97	198.32	199.29	203.91	208.84	199.28	195.97	198.32	199.29
	225	229.6	223.08	227.84	230.05	218.36	224.05	228.74	223.08	227.84	230.05	218.36	224.05	228.74	223.08	227.84	230.05
	252.86	245.08	255.61	244.94	248	251.84	240.86	245.79	255.61	244.94	248	251.84	240.86	245.79	255.61	244.94	248
280 315 355	286.02	280.91	274.44	285.16	290.63	271.37	280.41	285.92	274.44	285.16	290.63	271.37	280.41	285.92	274.44	285.16	290.63
	305.09	325.17	318.76	309.04	316.2	317.75	303.89	309.75	318.76	309.04	316.2	317.75	303.89	309.75	318.76	309.04	316.2
	349.58	351.45	345.07	367.04	345.43	345.58	360.93	367.62	345.07	367.04	345.43	345.58	360.93	367.62	345.07	367.04	345.43
400 450 500	405.19	415.27	408.97	402.74	418.5	414.09	396.02	403.22	408.97	402.74	418.5	414.09	396.02	403.22	408.97	402.74	418.5
	438.56	454.54	448.3	444.38		456.9	436.97	444.77	448.30	444.38	465	456.90	436.97	444.77	448.30	444.38	465
	520.7	500.37	494.18			507.5	485.36	493.87	494.18	493.59	520.8	507.5	485.36	493.87	494.18	493.59	520.8

MOTORIZED GEAR UNITS



Gear units are available as standard assemblies with IEC metric B5 flanged motors as well as NEMA C-face motors. Normally the gearbox and motor shafts are connected by flexible couplings, but other more compact and special solutions can be supplied.

MOTORIZED GEAR UNITS


Helical unit PB series

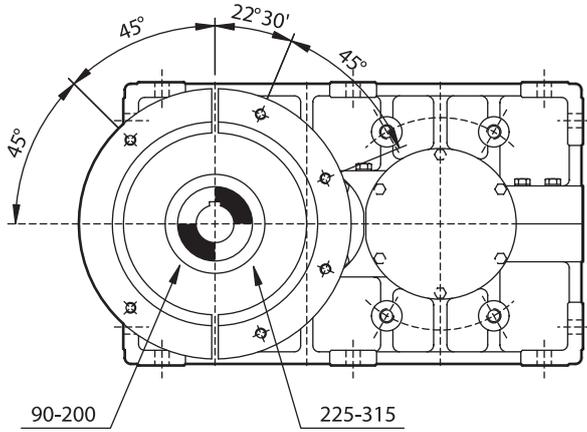

BC Type

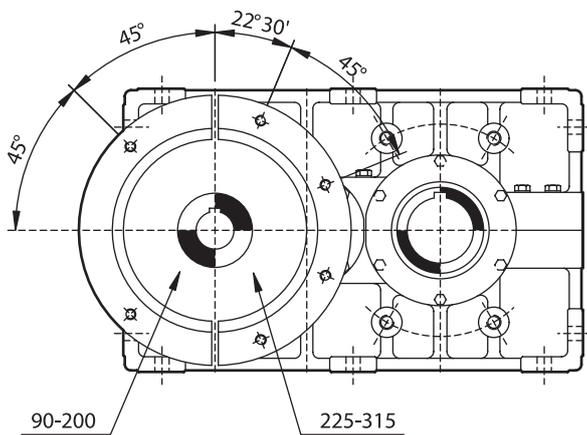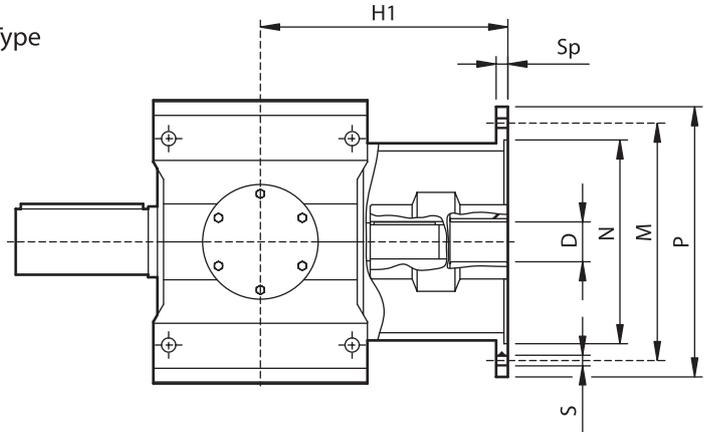

PAM Type

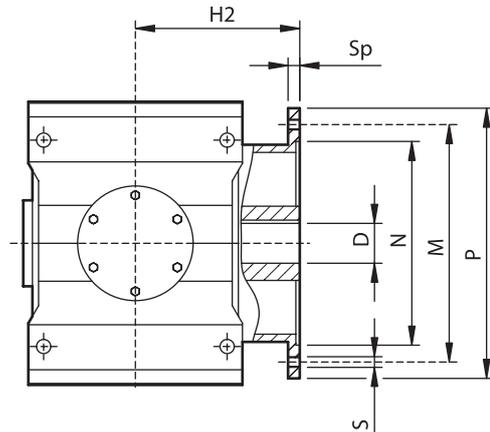


Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
10	90	24	165	130	200	M10	12	224	130
	100-112	28	215	180	250	M12	14	234	140
	132	38	265	230	300	M12	16	254	160
	160	42	300	250	350	M16	18	284	190
	180	48	300	250	350	M16	18	284	190
20	100-112	28	215	180	250	M12	14	264	145
	132	38	265	230	300	M12	16	284	165
	160	42	300	250	350	M16	18	314	195
	180	48	300	250	350	M16	18	314	195
	200	55	350	300	400	M16	20	314	195
30	100-112	28	215	180	250	M12	14	279	160
	132	38	265	230	300	M12	16	299	180
	160	42	300	250	350	M16	18	329	210
	180	48	300	250	350	M16	18	329	210
	200	55	350	300	400	M16	20	329	210
40	225	60	400	350	450	M16	20	359	240
	132	38	265	230	300	M12	16	334	180
	160	42	300	250	350	M16	18	364	210
	180	48	300	250	350	M16	18	364	210
	200	55	350	300	400	M16	20	364	210
50	225	60	400	350	450	M16	20	394	240
	250	65	500	450	550	M16	20	394	240
	132	38	265	230	300	M12	16	354	200
	160	42	300	250	350	M16	18	384	230
	180	48	300	250	350	M16	18	384	230
	200	55	350	300	400	M16	20	384	230
	225	60	400	350	450	M16	20	414	260
250	65	500	450	550	M16	20	414	260	
90	280	75	500	450	550	M16	20	414	260

Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
60	160	42	300	250	350	M16	18	414	220
	180	48	300	250	350	M16	18	414	220
	200	55	350	300	400	M16	20	414	220
	225	60	400	350	450	M16	20	444	250
	250	65	500	450	550	M16	20	444	250
70	280	75	500	450	550	M16	20	444	250
	160	42	300	250	350	M16	18	479	245
	180	48	300	250	350	M16	18	479	245
	200	55	350	300	400	M16	20	479	245
	225	60	400	350	450	M16	20	509	275
80	250	65	500	450	550	M16	20	509	275
	280	75	500	450	550	M16	20	509	275
	200	55	350	300	400	M16	20	514	275
	225	60	400	350	450	M16	20	544	305
	250	65	500	450	550	M16	20	544	305
90	280	75	500	450	550	M16	20	544	305
	315	80	600	550	660	M20	24	574	335
	200	55	350	300	400	M16	20	564	320
	225	60	400	350	450	M16	20	594	350
	250	65	500	450	550	M16	20	594	350
90	280	75	500	450	550	M16	20	594	350
	315	80	600	550	660	M20	24	624	380



All dimensions refer to IEC frame size motors

MOTORIZED GEAR UNITS


Helical unit PC series

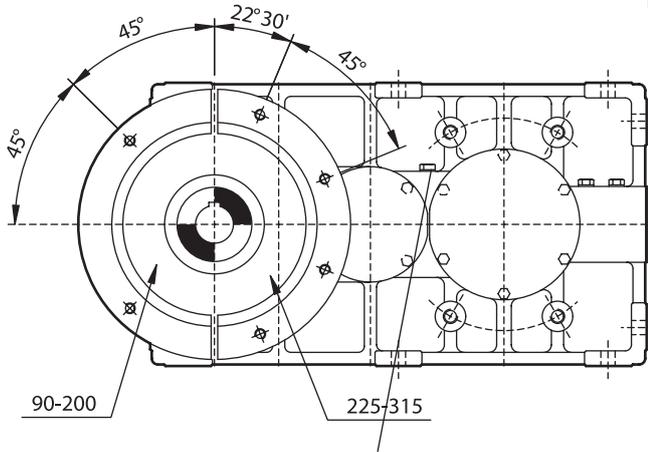

BC Type

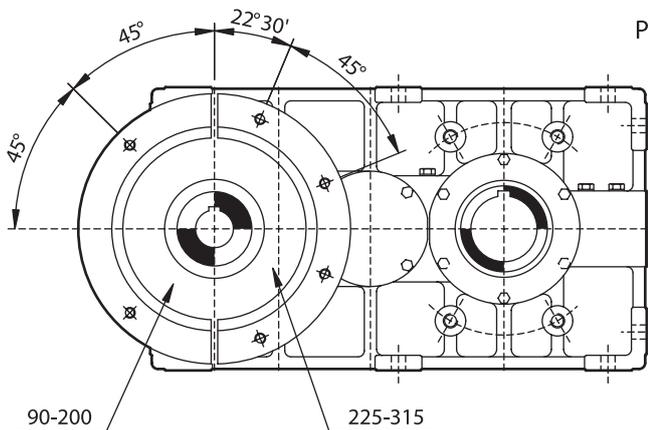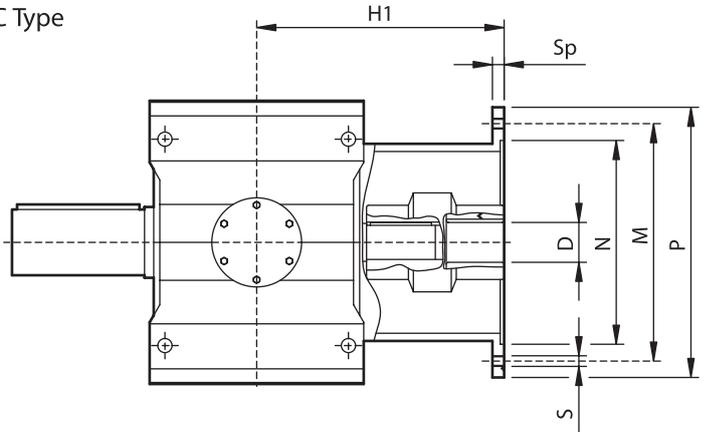

PAM Type

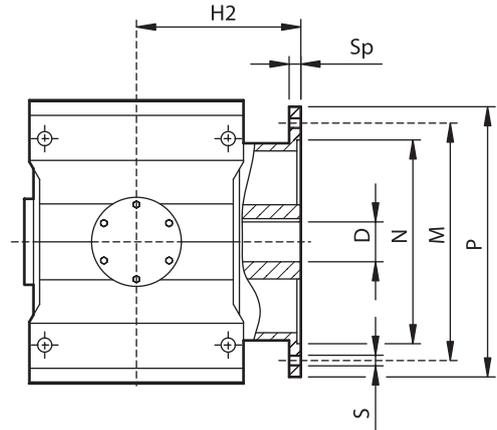


Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
10	90	24	165	130	200	M10	12	219	125
	100-112	28	215	180	250	M12	14	229	135
	132	38	265	230	300	M12	16	249	
	160	42	300	250	350	M16	18	279	
	180	48	300	250	350	M16	18	279	
20	100-112	28	215	180	250	M12	14	249	140
	132	38	265	230	300	M12	16	269	
	160	42	300	250	350	M16	18	299	
	180	48	300	250	350	M16	18	299	
30	200	55	350	300	400	M16	20	299	
	100-112	28	215	180	250	M12	14	264	155
	132	38	265	230	300	M12	16	284	175
	160	42	300	250	350	M16	18	314	
	180	48	300	250	350	M16	18	314	
40	200	55	350	300	400	M16	20	314	
	225	60	400	350	450	M16	20	344	
	132	38	265	230	300	M12	16	229	175
	160	42	300	250	350	M16	18	329	205
	180	48	300	250	350	M16	18	329	
50	200	55	350	300	400	M16	20	329	
	225	60	400	350	450	M16	20	359	
	250	65	500	450	550	M16	20	359	
	132	38	265	230	300	M12	16	319	195
	160	42	300	250	350	M16	18	349	225
	180	48	300	250	350	M16	18	349	225

Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
60	132	38	265	230	300	M12	16	344	215
	160	42	300	250	350	M16	18	374	245
	180	48	300	250	350	M16	18	374	245
	200	55	350	300	400	M16	20	374	245
	225	60	400	350	450	M16	20	404	
	250	65	500	450	550	M16	20	404	
70	280	75	500	450	550	M16	20	404	
	160	42	300	250	350	M16	18	429	245
	180	48	300	250	350	M16	18	429	245
	200	55	350	300	400	M16	20	429	245
	225	60	400	350	450	M16	20	459	275
80	250	65	500	450	550	M16	20	459	
	280	75	500	450	550	M16	20	459	
	180	48	300	250	350	M16	18	464	270
	200	55	350	300	400	M16	20	464	270
	225	60	400	350	450	M16	20	494	300
90	250	65	500	450	550	M16	20	494	300
	280	75	500	450	550	M16	20	494	
	200	55	350	300	400	M16	20	504	315
	225	60	400	350	450	M16	20	534	345
	250	65	500	450	550	M16	20	534	345
	280	75	500	450	550	M16	20	534	345

All dimensions refer to IEC frame size motors

MOTORIZED GEAR UNITS

Helical unit PD series

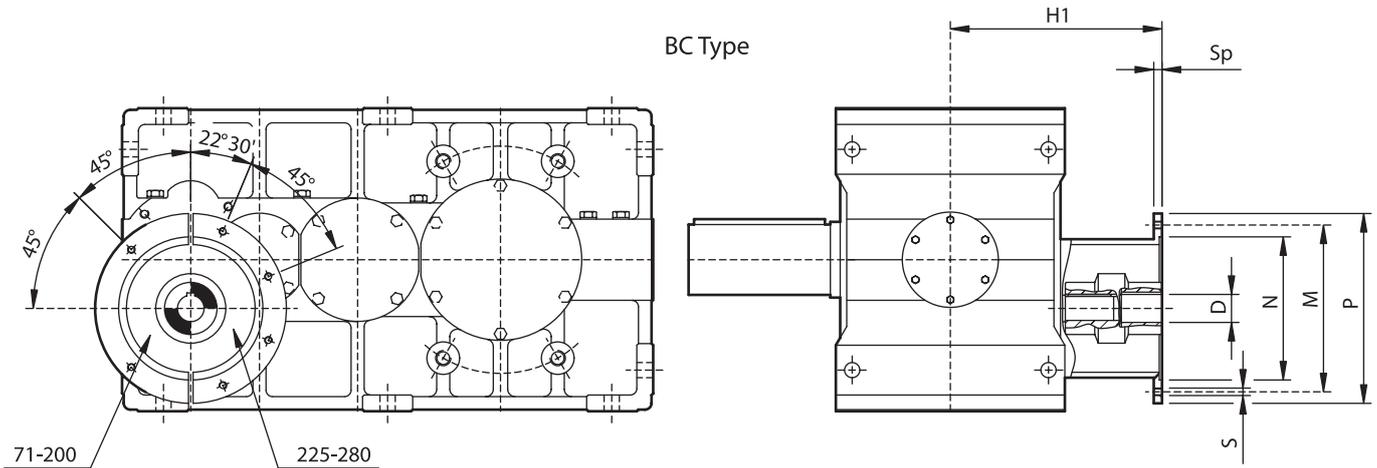

Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1
10	71	14	130	110	160	M8	12	184
	80	19	165	130	200	M10	12	194
	90	24	165	130	200	M10	12	204
	100-112	28	215	180	250	M12	14	214
	132	38	265	230	300	M12	16	234
20	80	19	165	130	200	M10	12	214
	90	24	165	130	200	M10	12	224
	100-112	28	215	180	250	M12	14	234
	132	38	265	230	300	M12	16	254
30	80	19	165	130	200	M10	12	239
	90	24	165	130	200	M10	12	249
	100-112	28	215	180	250	M12	14	259
	132	38	265	230	300	M12	16	279
40	160	42	300	250	350	M16	18	309
	90	24	165	130	200	M10	12	264
	100-112	28	215	180	250	M12	14	274
50	132	38	265	230	300	M12	16	294
	160	42	300	250	350	M16	18	324
	100-112	28	215	180	250	M12	14	284
	132	38	265	230	300	M12	16	304
50	160	42	300	250	350	M16	18	334
	180	48	300	250	350	M16	18	334


All dimensions refer to IEC frame size motors

Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1
60	100-112	28	215	180	250	M12	14	309
	132	38	265	230	300	M12	16	329
	160	42	300	250	350	M16	18	359
	180	48	300	250	350	M16	18	359
	200	55	350	300	400	M16	20	359
70	100-112	28	215	180	250	M12	14	344
	132	38	265	230	300	M12	16	364
	160	42	300	250	350	M16	18	394
	180	48	300	250	350	M16	18	394
	200	55	350	300	400	M16	20	394
	225	60	400	350	450	M16	20	424
80	132	38	265	230	300	M12	16	399
	160	42	300	250	350	M16	18	429
	180	48	300	250	350	M16	18	429
	200	55	350	300	400	M16	20	429
	225	60	400	350	450	M16	20	459
90	250	65	500	450	550	M16	20	459
	132	38	265	230	300	M12	16	434
	160	42	300	250	350	M16	18	464
	180	48	300	250	350	M16	18	464
	200	55	350	300	400	M16	20	464
	225	60	400	350	450	M16	20	494
	250	65	500	450	550	M16	20	494
	280	75	500	450	550	M16	20	494


MOTORIZED GEAR UNITS

Bevel-helical units RHB/RVB series

RHB

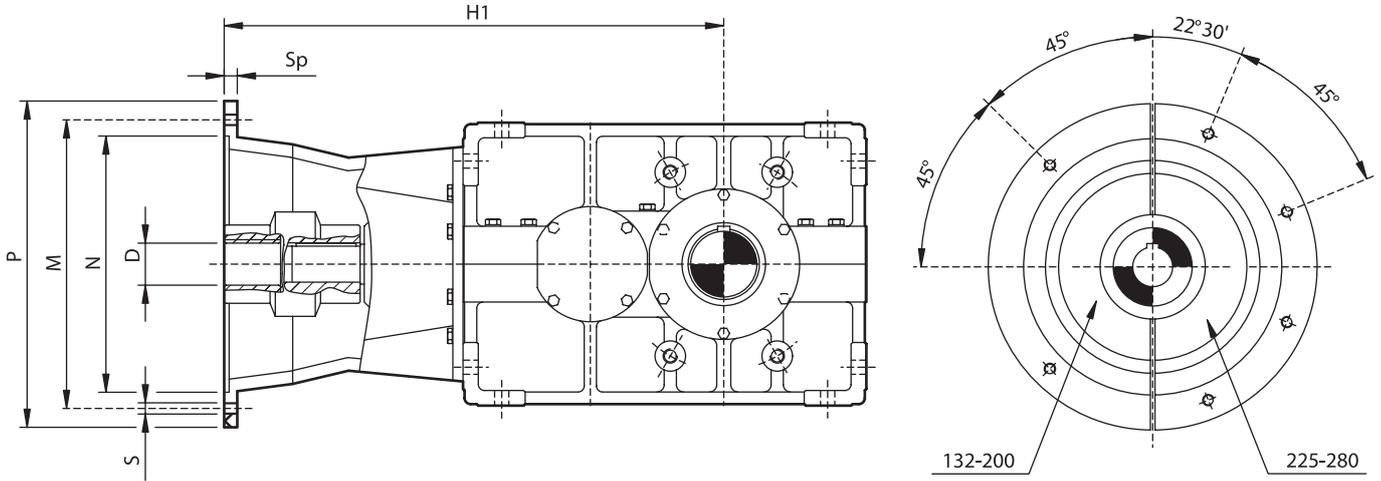

RVB


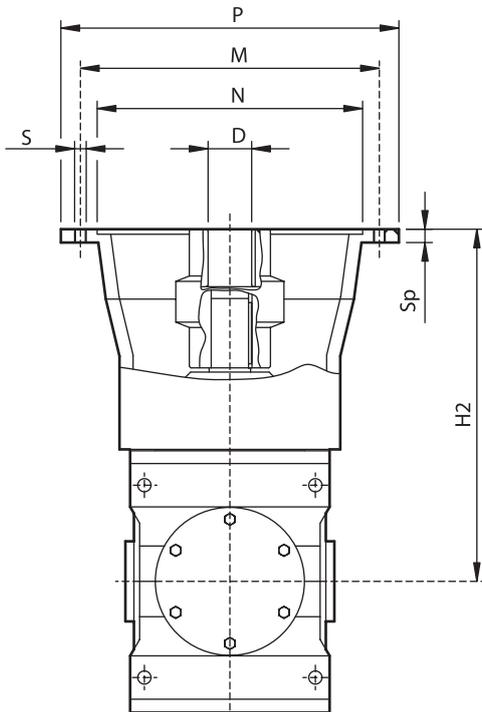


Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
10	132	38	265	230	300	M12	16	510	379
	160	42	300	250	350	M16	18	540	409
	180	48	300	250	350	M16	18	540	409
	200	55	350	300	400	M16	20	540	409
20	132	38	265	230	300	M12	16	564	414
	160	42	300	250	350	M16	18	594	444
	180	48	300	250	350	M16	18	594	444
	200	55	350	300	400	M16	20	594	444
	225	60	400	350	450	M16	20	624	474
30	160	42	300	250	350	M16	18	654	484
	180	48	300	250	350	M16	18	654	484
	200	55	350	300	400	M16	20	654	484
	225	60	400	350	450	M16	20	684	514
	250	65	500	450	550	M16	20	684	514
40	160	42	300	250	350	M16	18	719	529
	180	48	300	250	350	M16	18	719	529
	200	55	350	300	400	M16	20	719	529
	225	60	400	350	450	M16	20	749	559
	250	65	500	450	550	M16	20	749	559
50	160	42	300	250	350	M16	18	795	579
	180	48	300	250	350	M16	18	795	579
	200	55	350	300	400	M16	20	795	579
	225	60	400	350	450	M16	20	825	609
	250	65	500	450	550	M16	20	825	609
60	280	75	500	450	550	M16	20	825	609
	200	55	350	300	400	M16	20	874	634
	225	60	400	350	450	M16	20	904	664
	250	65	500	450	550	M16	20	904	664
	280	75	500	450	550	M16	20	904	664
70	200	55	350	300	400	M16	20	966	704
	225	60	400	350	450	M16	20	996	734
	250	65	500	450	550	M16	20	996	734
	280	75	500	450	550	M16	20	996	734
80	200	55	350	300	400	M16	20	1074	774
	225	60	400	350	450	M16	20	1104	804
	250	65	500	450	550	M16	20	1104	804
	280	75	500	450	550	M16	20	1104	804
90	200	55	350	300	400	M16	20	1194	854
	225	60	400	350	450	M16	20	1224	884
	250	65	500	450	550	M16	20	1224	884
	280	75	500	450	550	M16	20	1224	884

All dimensions refer to IEC frame size motors

MOTORIZED GEAR UNITS

Bevel-helical units RHC/RVC series

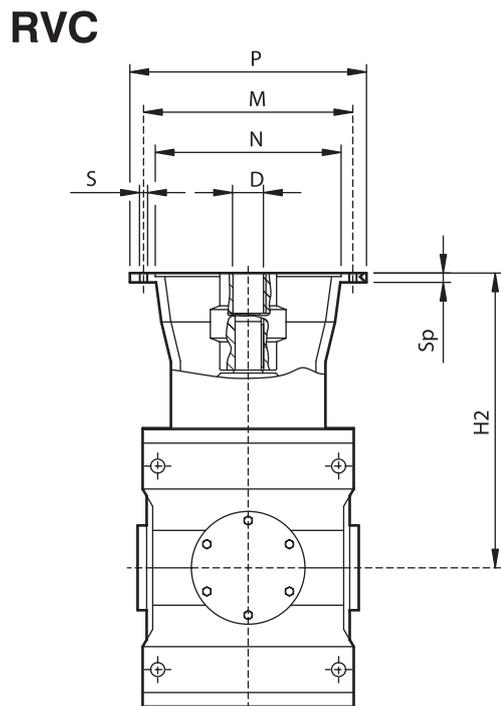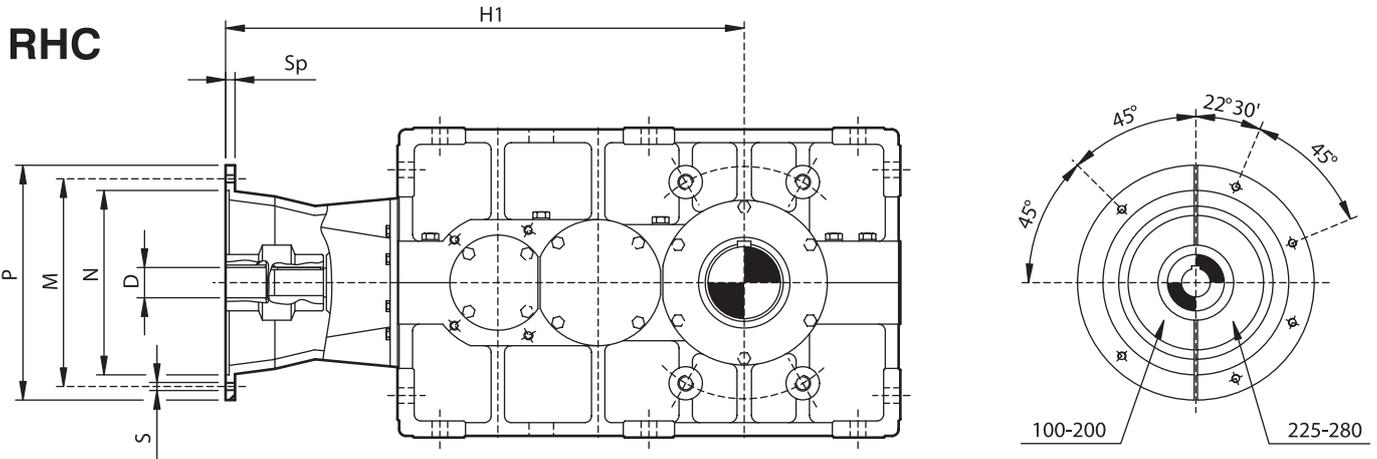


Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
10	100-112	28	215	180	250	M12	14	495	274
	132	38	265	230	300	M12	16	515	294
	160	42	300	250	350	M16	18	545	324
	180	48	300	250	350	M16	18	545	324
20	100-112	28	215	180	250	M12	14	549	299
	132	38	265	230	300	M12	16	569	319
	160	42	300	250	350	M16	18	599	349
	180	48	300	250	350	M16	18	599	349
	200	55	350	300	400	M16	20	599	349
30	132	38	265	230	300	M12	16	631	349
	160	42	300	250	350	M16	18	661	379
	180	48	300	250	350	M16	18	661	379
	200	55	350	300	400	M16	20	661	379
	225	60	400	350	450	M16	20	691	409
40	132	38	265	230	300	M12	16	694	379
	160	42	300	250	350	M16	18	724	409
	180	48	300	250	350	M16	18	724	409
	200	55	350	300	400	M16	20	724	409
	225	60	400	350	450	M16	20	754	439
50	250	65	500	450	550	M16	20	754	439
	160	42	300	250	350	M16	18	800	444
	180	48	300	250	350	M16	18	800	444
	200	55	350	300	400	M16	20	800	444
	225	60	400	350	450	M16	20	830	474
60	250	65	500	450	550	M16	20	830	474
	280	75	500	450	550	M16	20	830	474
	180	48	300	250	350	M16	18	884	484
	200	55	350	300	400	M16	20	884	484
	225	60	400	350	450	M16	20	914	514
70	250	65	500	450	550	M16	20	914	514
	280	75	500	450	550	M16	20	914	514
	200	55	350	300	400	M16	20	971	529
	225	60	400	350	450	M16	20	1001	559
80	250	65	500	450	550	M16	20	1001	559
	280	75	500	450	550	M16	20	1001	559
	225	60	400	350	450	M16	20	1109	609
90	250	65	500	450	550	M16	20	1109	609
	280	75	500	450	550	M16	20	1109	609
90	250	65	500	450	550	M16	20	1229	664
	280	75	500	450	550	M16	20	1229	664


All dimensions refer to IEC frame size motors

MOTORIZED GEAR UNITS

Bevel-helical units RHD/RVD series

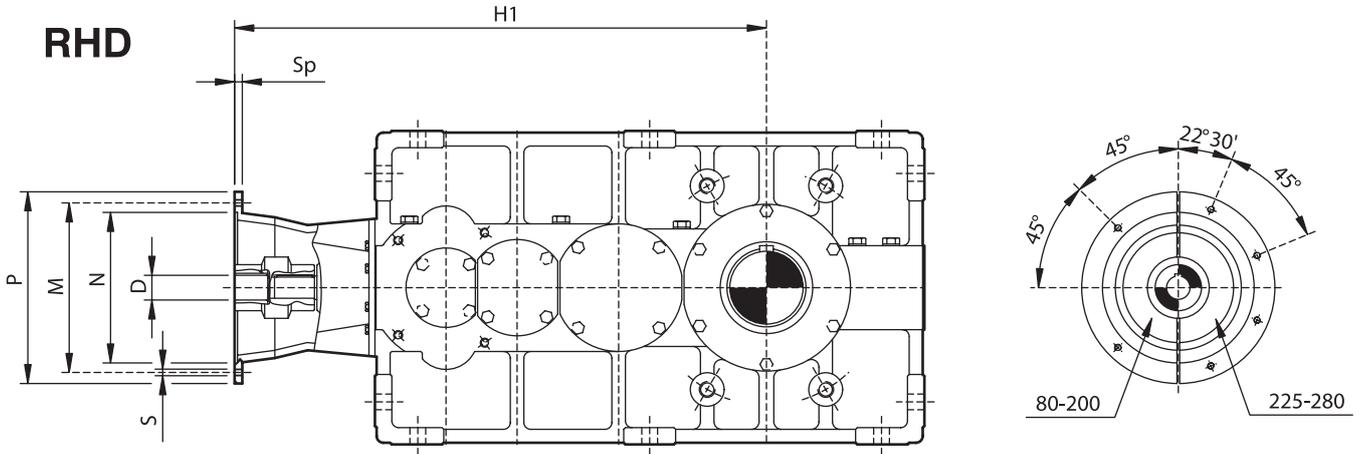


RVD

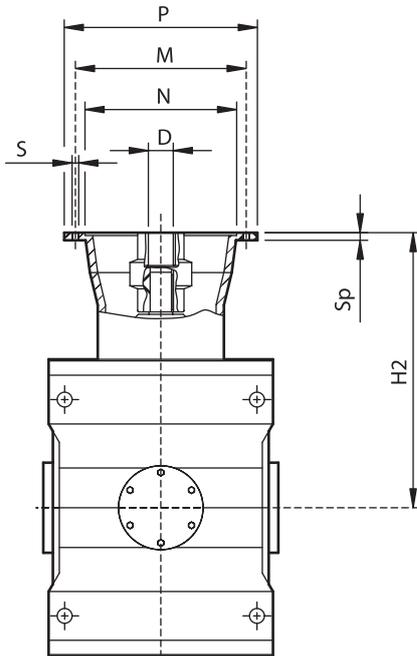

Unit Size	Motor IEC	D H7	M	N	P	S	Sp	H1	H2
10	80	19	165	130	200	M10	12	475	239
	90	24	165	130	200	M10	12	485	249
	100-112	28	215	180	250	M12	14	495	259
20	90	24	165	130	200	M10	12	539	274
	100-112	28	215	180	250	M12	14	549	284
	132	38	265	230	300	M12	16	569	304
30	90	24	165	130	200	M10	12	601	299
	100-112	28	215	180	250	M12	14	611	309
	132	38	265	230	300	M12	16	631	329
40	160	42	300	250	350	M16	18	661	359
	100-112	28	215	180	250	M12	14	679	339
	132	38	265	230	300	M12	16	699	359
50	160	42	300	250	350	M16	18	729	389
	100-112	28	215	180	250	M12	14	755	369
	132	38	265	230	300	M12	16	775	389
60	160	42	300	250	350	M16	18	805	419
	180	48	300	250	350	M16	18	805	419
	100-112	28	215	180	250	M12	14	841	409
70	132	38	265	230	300	M12	16	861	429
	160	42	300	250	350	M16	18	891	459
	180	48	300	250	350	M16	18	891	459
80	200	55	350	300	400	M16	20	891	459
	132	38	265	230	300	M12	16	946	469
	160	42	300	250	350	M16	18	976	499
90	180	48	300	250	350	M16	18	976	499
	200	55	350	300	400	M16	20	976	499
	225	60	400	350	450	M16	20	1006	529
80	132	38	265	230	300	M12	16	1054	519
	160	42	300	250	350	M16	18	1084	549
	180	48	300	250	350	M16	18	1084	549
90	200	55	350	300	400	M16	20	1084	549
	225	60	400	350	450	M16	20	1114	579
	250	65	500	450	550	M16	20	1114	579
90	160	42	300	250	350	M16	18	1209	604
	180	48	300	250	350	M16	18	1209	604
	200	55	350	300	400	M16	20	1209	604
90	225	60	400	350	450	M16	20	1239	634
	250	65	500	450	550	M16	20	1239	634
	280	75	500	450	550	M16	20	1239	634

All dimensions refer to IEC frame size motors

SHAFT ENDING

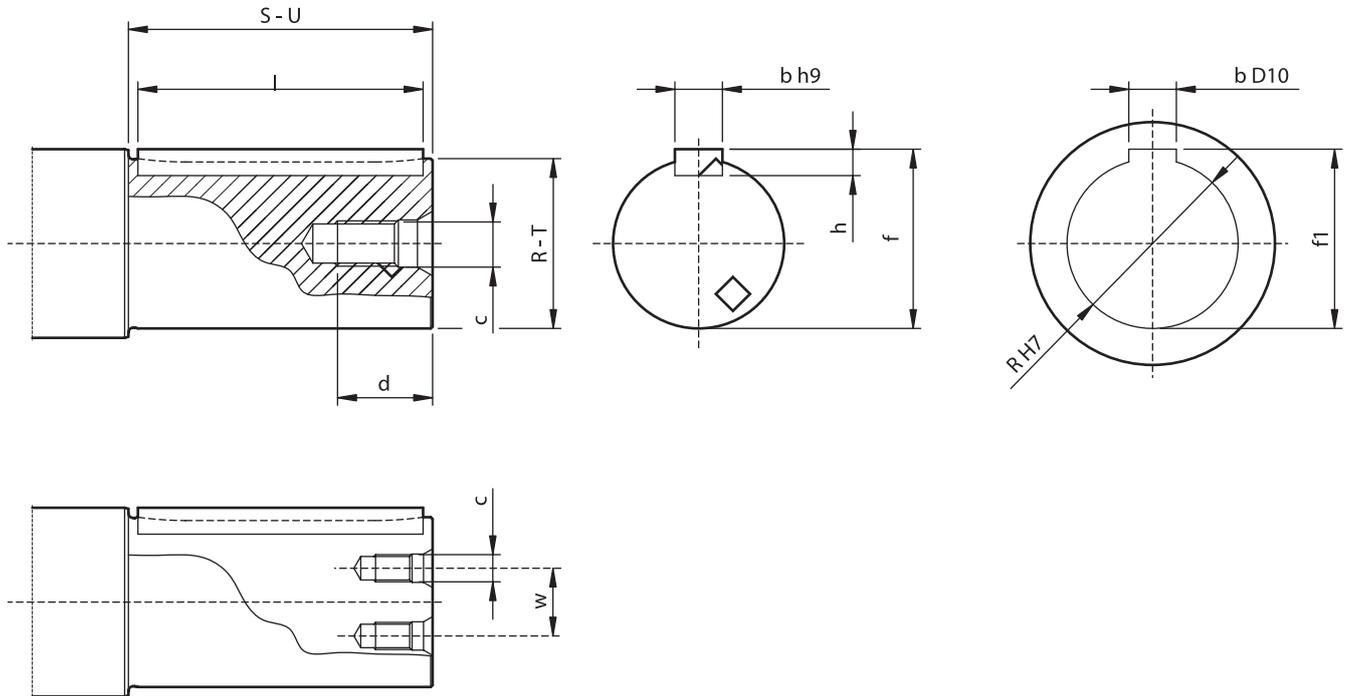


Tapped holes on top according to DIN 332
Keys according to UNI 6604-69

R-T	S-U a11	c	d	w	Key			f	f1
					b	h	l		
15 j6	30	M6	16		6	6	25	17,5	
18 j6	35	M6	16		6	6	30	20,5	
20 j6	40	M6	16		6	6	35	22,5	
22 j6	45	M6	16		6	6	40	24,5	
24 j6	50	M8	19		8	7	45	27	
28 j6	55	M8	19		8	7	50	31	
32 k6	65	M10	22		10	8	60	35	
35 k6	70	M10	22		10	8	60	38	
40 k6	80	M10	22		12	8	70	43	
45 k6	90	M10	22		14	9	80	48,5	
50 k6	100	M12	28		14	9	90	53,5	
55 m6	110	M12	28		16	10	100	59	
60 m6	120	M12	28		18	11	110	64	
65 m6	110	M16	36		18	11	100	69	69,4
70 m6	140	M16	36		20	12	125	74,5	
75 m6	150	M16	36		20	12	125	79,5	
80 m6	140	M16	36		22	14	125	85	
80 m6	160	M16	36		22	14	140	85	85,4
85 m6	170	M16	36		22	14	140	90	
90 m6	160	M16	36		25	14	140	95	95,4
90 m6	180	M16	36		25	14	160	95	
100 m6	180	M20	42		28	16	160	106	106,4
100 m6	200	M20	42		28	16	180	106	
110 m6	200	M20	42		28	16	180	116	116,4
110 m6	22	M20	42		28	16	200	116	
120 m6	210	M20	42		32	18	180	127	127,4
130 m6	260	M20	42		32	18	220	137	
140 m6	250	M24	50		36	20	220	148	148,4
140 m6	280	M24	50		36	20	250	148	
150 m6	300	M24	50		36	20	280	158	
160 m6	280	M24	50		40	22	250	169	169,4
160 m6	320	M24	50		40	22	280	169	
170 m6	300	M24	50		40	22	280	179	179,4
180 m6	360	M24	50		45	25	320	190	
190 m6	380	M30	64		45	25	360	200	
200 m6	350	M30	64		45	25	320	210	210,4
220 m6	390	M30	64		50	28	360	231	231,4
240 m6	410	2 off M30	64	150	56	32	360	252	
270 m6	470	2 off M30	64	150	63	32	400	282	
300 m6	500	2 off M30	64	180	70	36	450	314	
340 m6	550	2 off M30	64	180	80	40	500	355	
380 m6	630	2 off M30	64	210	90	45	550	397	

SHAFT ENDING


Hollow shaft with keyway

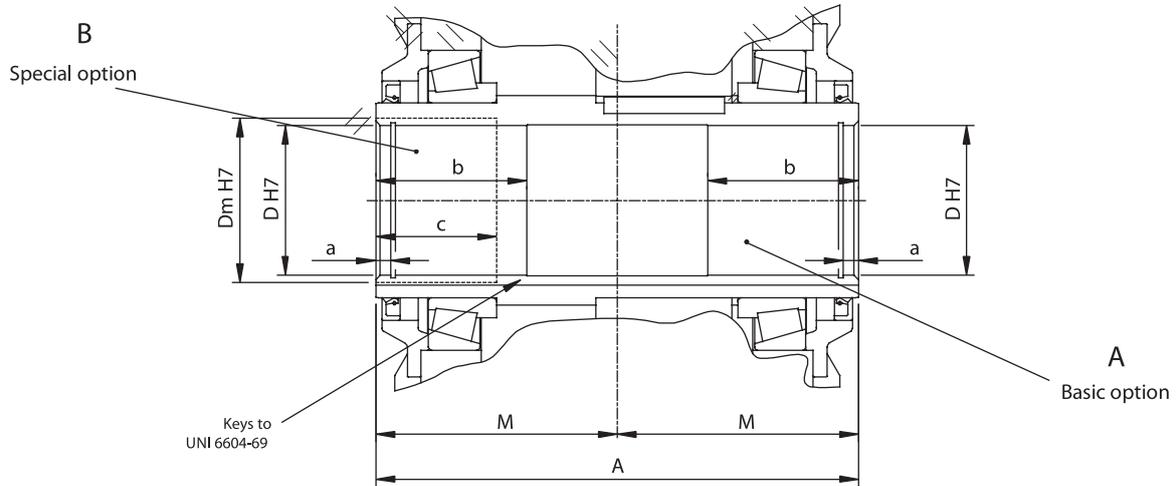


Size	10	20	30	40	50	60	70	80	90	100	110
A	230	270	290	320	340	380	450	500	560	620	750
D	65	80	90	100	110	120	140	160	170	200	220
Dm	70	90	100	110	120	130	155	175	185	215	235
M	115	135	145	160	170	190	225	250	280	310	375
a	7	8	9	10	11	12	14	16	18	20	22
b	65	80	90	100	110	120	140	160	170	200	220
c	56	70	80	90	100	110	125	140	160	180	200

Driven machine shaft end

Option A

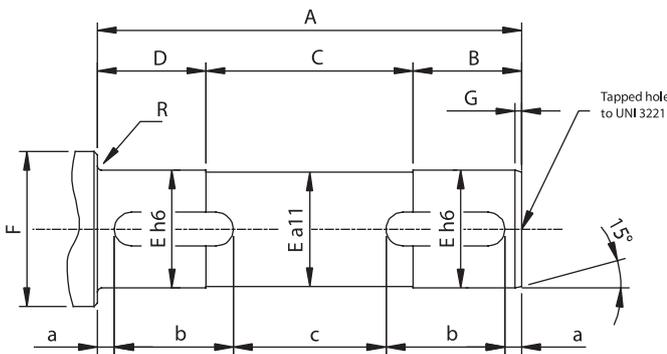

Option B

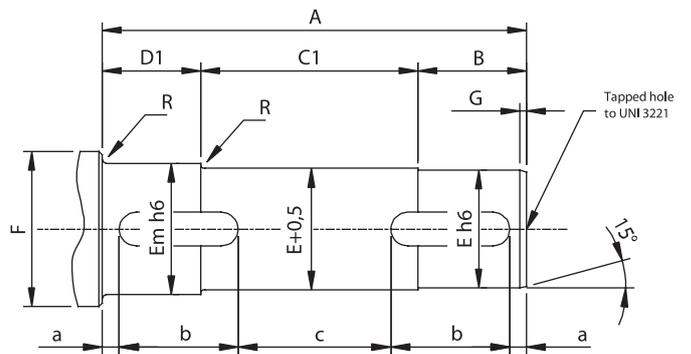


Keys dimensioned on E to UNI 6604

Size	10	20	30	40	50	60	70	80	90	100	110
A	212	250	265	295	310	350	415	460	515	570	695
B	50	65	70	80	85	95	110	125	130	155	170
C	97	105	105	115	115	135	165	175	215	215	305
C1	108	117	117	127	127	147	182	197	227	237	327
D	65	80	90	100	110	120	140	160	170	200	220
D1	54	68	78	88	98	108	123	138	158	178	198
E	65	80	90	100	110	120	140	160	170	200	220
Em	70	90	100	110	120	130	155	175	185	215	235
F	83	97	107	122	135	145	175	195	205	235	255
G	3	3,5	4	4,5	5	5,5	6	7	8	9	10
R	2	2,2	2,5	2,8	3	3,5	4	4,5	5	5,5	6
a	5	5	5	5	8	8	8	8	10	10	10
b	60	80	90	100	110	110	125	150	160	180	200
c	82	80	75	85	74	114	149	144	175	190	275

SHAFT ENDING


Hollow shaft with shrink disc

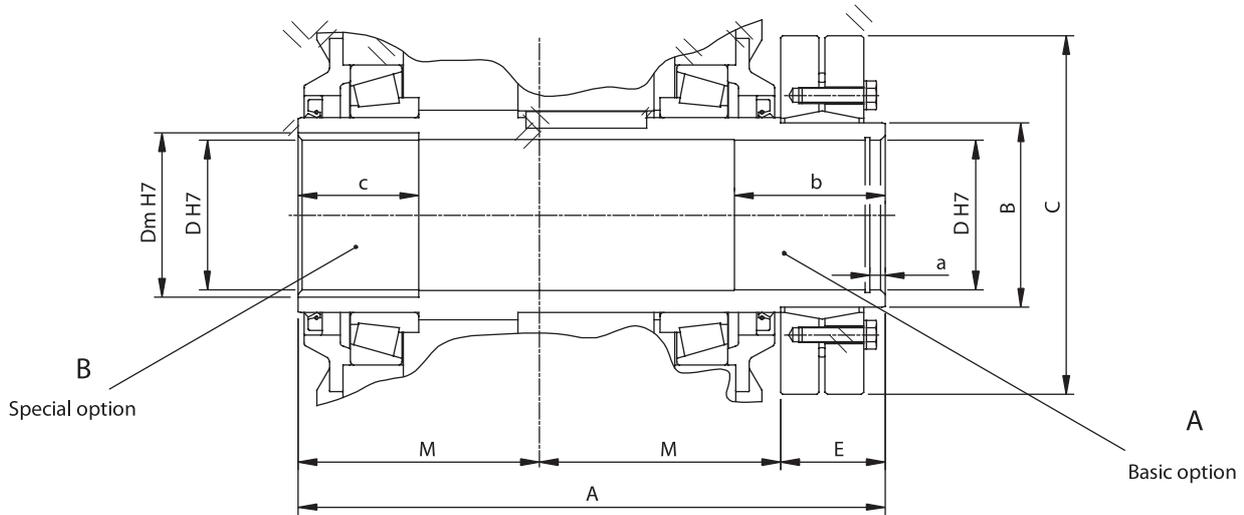


Size	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
A	278	333	366	396	429	476	564	614	694	770	914	1015	1150	1215	1365	1520
B	80	100	120	130	155	165	185	200	220	260	280	300	340	380	420	460
C	145	170	215	215	265	290	330	350	370	430	460	485	570	645	690	770
D	65	80	90	100	110	120	140	160	170	200	220	240	270	300	340	380
Dm	70	90	100	110	120	130	155	175	185	215	235	260	290	320	360	400
E	48	63	76	76	89	96	114	114	134	150	164	175	190	205	235	260
M	115	135	145	160	170	190	225	250	280	310	375	420	480	505	565	630
a	7	8	9	10	11	12	14	16	18	20	22	25	28	31	35	40
b	65	80	90	100	110	120	140	160	170	200	220	240	270	300	340	380
c	56	70	80	90	100	110	125	140	160	180	200	225	250	280	310	350

Driven machine shaft end

Option A

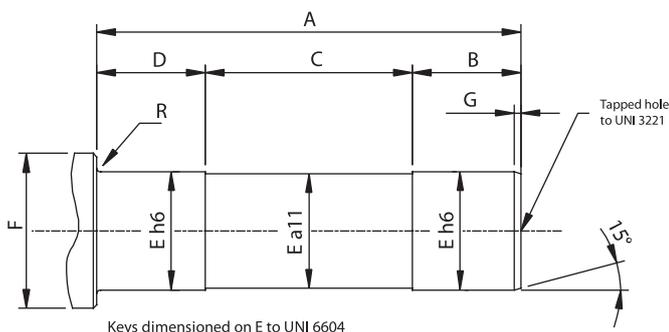


Option B

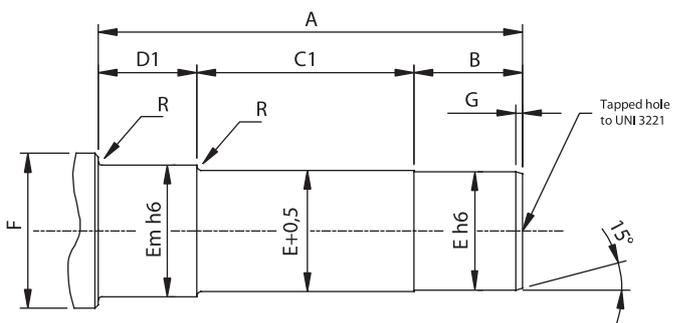


Size	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
A	260	313	341	371	399	446	529	574	649	720	859	955	1085	1140	1280	1425
B	50	65	70	80	85	95	110	125	130	155	170	185	210	230	260	290
C	145	168	181	191	204	231	279	289	349	365	469	530	605	610	680	755
C1	156	180	193	203	216	243	296	311	361	387	491	548	628	633	713	788
D	65	80	90	100	110	120	140	160	170	200	220	240	270	300	340	380
D1	54	68	78	88	98	108	123	138	158	178	198	222	247	277	307	347
E	65	80	90	100	110	120	140	160	170	200	220	240	270	300	340	380
Em	70	90	100	110	120	130	155	175	185	215	235	260	290	320	360	400
F	83	97	107	122	135	145	175	195	205	235	255	290	320	350	390	430
G	3	3,5	4	4,5	5	5,5	6	7	8	9	10	11	12	14	16	18
R	2	2,2	2,5	2,8	3	3,5	4	4,5	5	5,5	6	6,5	7	8	9	10

INSTALLATION


Mounting

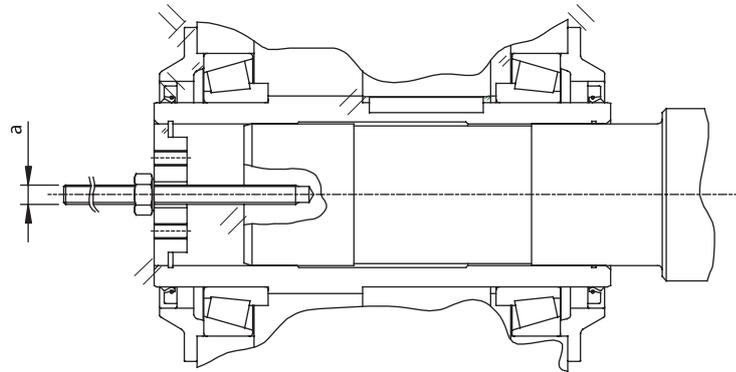

Fixing

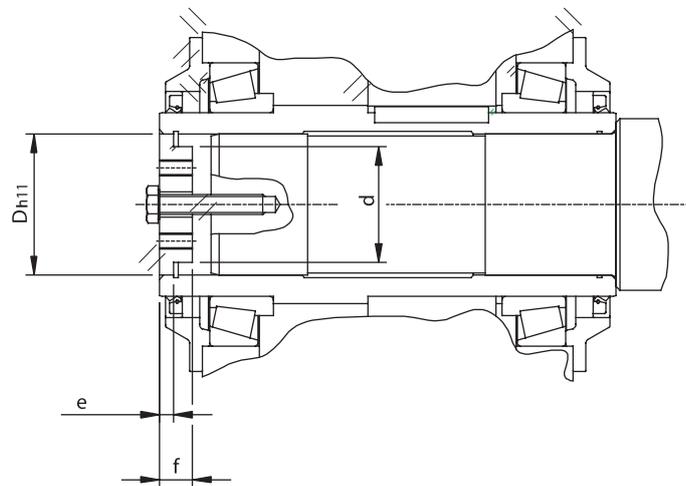


Removing

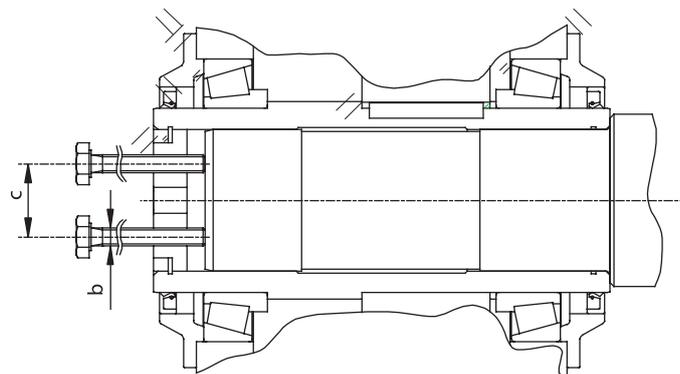

Size	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
a	M16	M16	M16	M20	M20	M20	M24	M24	M24	M30	M30	M30	M30	M36	M36	M36
b	M10	M12	M14	M14	M16	M16	M18	M18	M20	M20	M24	M24	M24	M24	M30	M30
c	37	48	55	60	65	75	95	105	115	140	155	165	190	210	235	260
Ø D	65	80	90	100	110	120	140	160	170	200	220	240	270	300	340	380
Ø d	52	66	74	82	90	100	120	136	148	172	190	205	230	255	290	320
e	7	8	9	10	11	12	14	16	18	20	22	25	28	32	35	40
f	16	18	20	22	25	28	32	36	40	45	50	55	60	70	80	90
Circlip	I 65	I 80	I 90	I 100	I 110	I 120	I 140	I 160	I 170	I 200	I 220	I 240	I 270	I 300	I 340	I 380


OUTPUT FLANGES

Flanged gearbox output casing normally allows direct assembly to the driven machine. Special designs, as well as B5 standard patterns (see dimensional data sheet), are available.

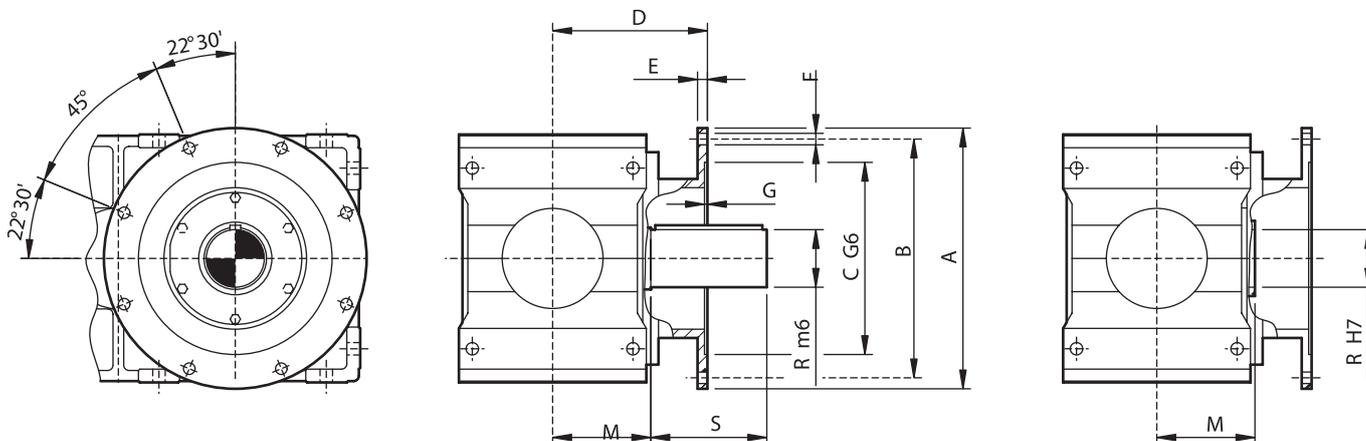

Size	Ø A	Ø B	Ø C	D	E	Ø F	G	M	Ø R	S
10	300	265	230	170	14	18	5	115	65	110
20	300	265	230	185	14	20	5	135	80	140
30	350	300	250	210	16	22	6	145	90	160
40	400	350	300	225	16	22	6	160	100	180
50	450	400	350	245	16	24	6	170	110	200
60	550	500	450	270	18	27	7	190	120	210
70	550	500	450	300	20	30	7	225	140	250
80	660	600	550	350	22	33	7	250	16	280
90	660	600	550	390	22	36	7	280	170	300
100	ON REQUEST									
110	ON REQUEST									



SHAFT-MOUNTED APPLICATIONS

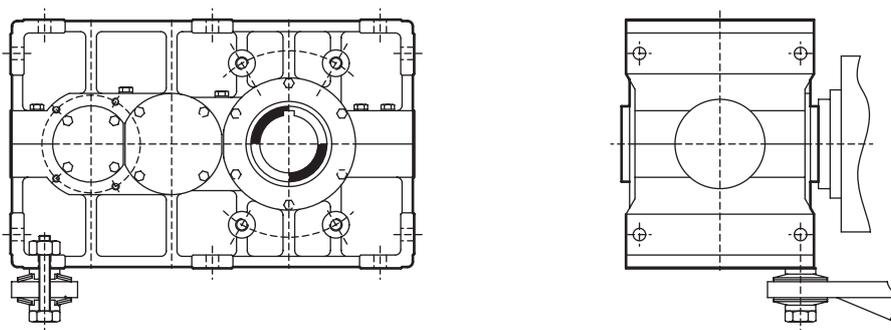

All units can be supplied with elastic constraint, semi-flexible and rigid reaction arrangement.

BACKSTOP DEVICES

Holdbacks can be fitted to all gear units. They are located externally on helical pinion shaft as shown in the diagrams below.

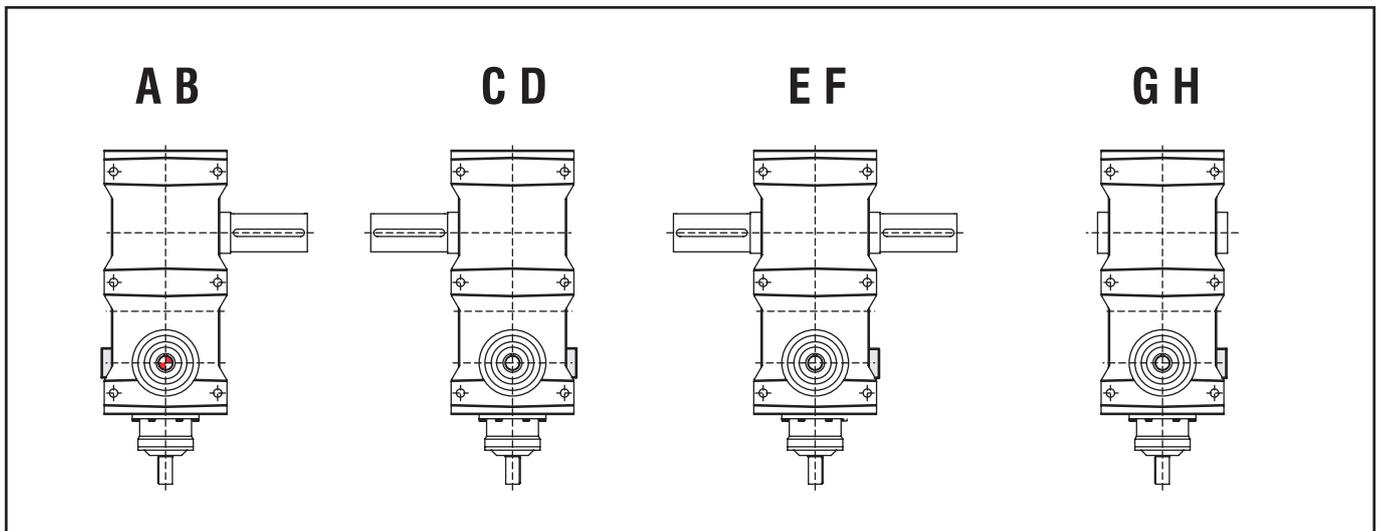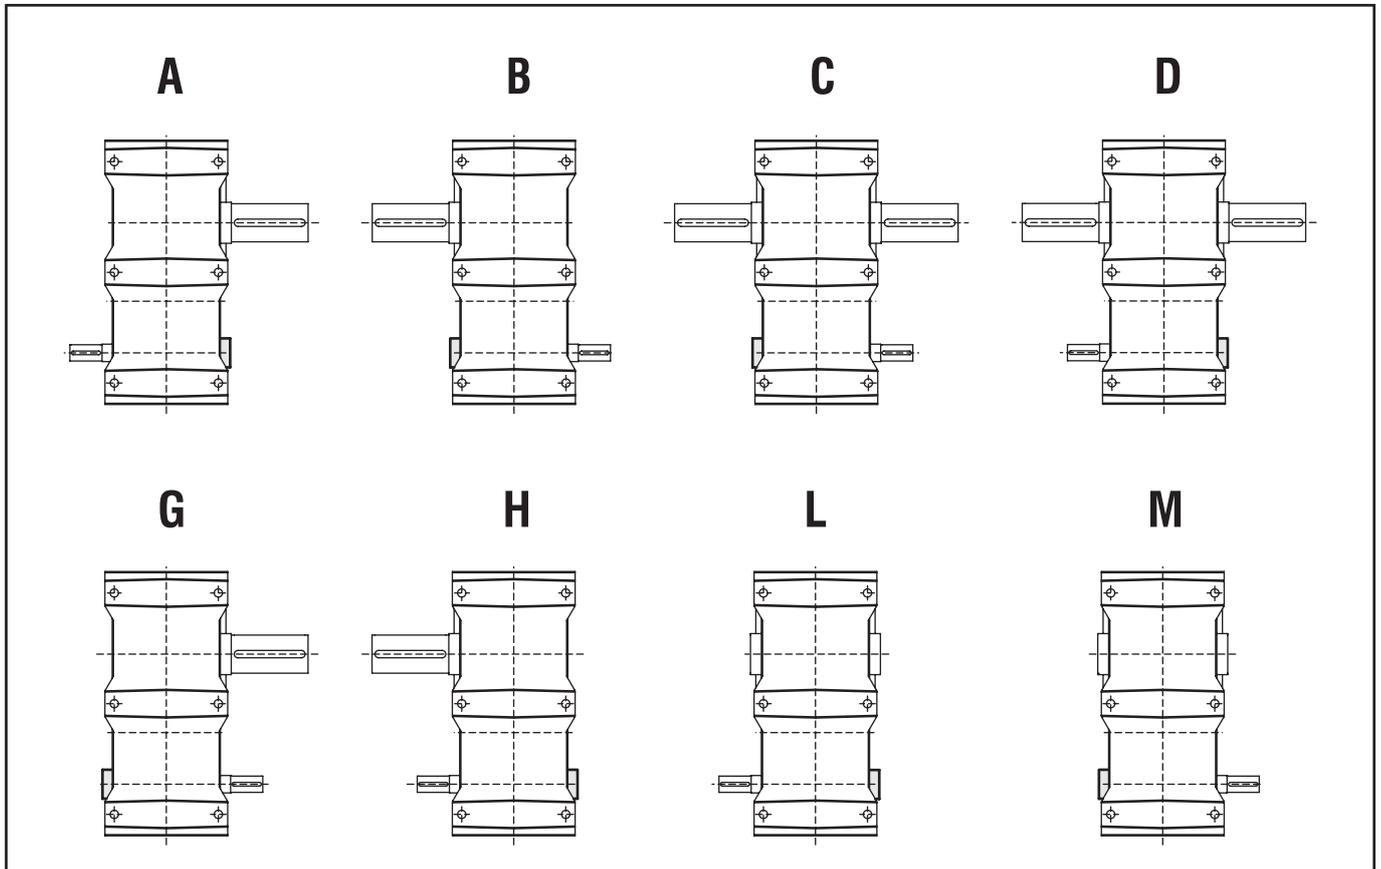



OVERHUNG LOADS

Whenever transmission components, generating radial loads, are fitted on input and output shafts, it is necessary to check that the values of such loads are compatible with the gearbox capacity.

In the table below, maximum admissible overhung loads on high speed shaft Fr1 and on the low speed shaft Fr2 are shown, having as reference the load operating at the middle of the shaft ends (dimensions U and S of relevant dimensional tables).

- a) if acting at 0.25 U or S from the gearbox side, multiply such values by 2.
- b) if acting at 0.75 U or S from the gearbox side, multiply such values by 0.67.

When overhung load is less than 20% of admissible load shown in the table, no check is required.

Along with overhung load, a **thrust load** of 20% of overhung load is acceptable. For higher value, please refer to us.

Roughly overhung loads can be obtained by using the following formula :

$$Fr = k \cdot \frac{T}{D}$$

T (Nm) : torque

D (mm) : pitch circle diameter of the driving or driven component

Where k :

1. 2000 for chain drive
2. 2100 for gear drive
3. 3000 for cog belt drive
4. 5000 for V-belt drive

MASS MOMENTS OF INERTIA

The mass moments of inertia J_1 refer to the high speed shaft of a standard gearbox without fan.

The mass moments of inertia J_2 refer to the low speed shaft and are given by the following formula :

$$J_2 = J_1 \cdot i_r^2$$

i_r : actual ratio

HELICAL GEAR UNITS

Overhung loads Fr_1, Fr_2 - Mass Moment of Inertia J_1

		Size																	
		i_n	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	
PA	1.12	Fr_1	N	on request															
		Fr_2	N	14400	22000	28800	35500	42700	49400	69800	85700	112900	147800	156400					
		J_1	kgm ²	0,0300	0,0530	0,0941	0,1667	0,2969	0,5232	0,8987	1,6120	2,8570	4,9945	8,8947					
	1.25	Fr_1	N	on request															
		Fr_2	N	13900	21400	27500	34600	42000	47800	68900	83200	109000	145800	153900					
		J_1	kgm ²	0,0270	0,0477	0,0847	0,1502	0,2675	0,4714	0,8097	1,4523	2,5739	4,4996	8,0131					
	1.4	Fr_1	N	on request															
		Fr_2	N	13600	20900	26600	33500	41500	47400	67900	80300	106100	143300	150300					
		J_1	kgm ²	0,0243	0,0430	0,0763	0,1353	0,2410	0,4246	0,7295	1,3084	2,3188	4,0537	7,2191					
	1.6	Fr_1	N	on request															
		Fr_2	N	13500	20800	25500	33100	40600	46000	66500	77100	104400	141300	149100					
		J_1	kgm ²	0,0217	0,0383	0,0682	0,1208	0,2151	0,3792	0,6512	1,1682	2,0704	3,6194	6,4458					
	1.8	Fr_1	N	on request															
		Fr_2	N	12600	19600	24900	32600	39800	45100	65500	75300	102200	139500	147800					
		J_1	kgm ²	0,0194	0,0343	0,0608	0,1078	0,1921	0,3385	0,5815	1,0430	1,8486	3,2316	5,7552					
	2	Fr_1	N	5200	6700	9200	13500	14500	22100	27900	34000	46300	55500	67900					
		Fr_2	N	12400	19200	24100	31700	39200	44100	64300	71500	100000	137300	146600					
J_1		kgm ²	0,0173	0,0306	0,0543	0,0963	0,1716	0,3023	0,5192	0,9313	1,6505	2,8853	5,1385						
2.25	Fr_1	N	5500	7000	9500	14000	15100	23100	29000	35400	48200	57800	70300						
	Fr_2	N	11800	18200	23400	31000	38300	42900	63100	67700	98100	135200	145400						
	J_1	kgm ²	0,0154	0,0273	0,0484	0,0858	0,1527	0,2691	0,4622	0,8292	1,4695	2,5690	4,5751						
2.5	Fr_1	N	4400	5700	8100	11600	12600	19900	26800	31300	40100	46300	60500						
	Fr_2	N	10400	16100	21600	30100	36400	38800	56700	66000	87500	125400	144200						
	J_1	kgm ²	0,0138	0,0245	0,0433	0,0770	0,1370	0,2413	0,4146	0,7437	1,3180	2,3041	4,1034						
2.8	Fr_1	N	4600	5900	8300	12000	13100	20700	27800	32500	41600	48100	62800						
	Fr_2	N	10400	16100	21600	30100	36400	38800	56700	66000	87500	125400	144200						
	J_1	kgm ²	0,0123	0,0217	0,0384	0,0681	0,1081	0,2136	0,3670	0,6582	1,1665	2,0393	3,6317						
3.15	Fr_1	N	4800	6100	8600	12500	13600	21500	28800	33800	43200	49900	64000						
	Fr_2	N	10400	16100	21600	30100	36400	38800	56700	66000	87500	125400	144200						
	J_1	kgm ²	0,0109	0,0194	0,0344	0,0610	0,1087	0,1914	0,3288	0,5898	1,0453	1,8274	3,2545						
3.55	Fr_1	N	4900	6300	8900	13000	14100	22300	29800	35000	44800	51700	65000						
	Fr_2	N	10400	16100	21600	30100	36400	38800	56700	66000	87500	125400	144200						
	J_1	kgm ²	0,0095	0,0169	0,0299	0,0530	0,0945	0,1665	0,2863	0,5129	0,9090	1,5891	2,8300						
4	Fr_1	N	5100	6400	9100	13500	14600	23100	30800	36200	46400	53500	66000						
	Fr_2	N	8800	14200	19400	24500	35000	37600	53400	53300	79400	118300	125800						
	J_1	kgm ²	0,0082	0,0146	0,0260	0,0460	0,0819	0,1443	0,2479	0,4445	0,7878	1,3772	2,4527						
4.5	Fr_1	N	5200	6700	9500	13800	15100	23800	31900	37400	48000	55300	66500						
	Fr_2	N	10400	16100	21800	27200	30400	33400	48100	59800	82800	110300	123400						
	J_1	kgm ²	0,0072	0,0127	0,0225	0,0398	0,0708	0,1248	0,2145	0,3846	0,6817	1,1918	2,1224						
5	Fr_1	N	5400	6900	9800	14300	15600	24600	32900	38700	49600	57100	68200						
	Fr_2	N	11700	18000	24500	30000	35000	38200	55700	67300	93000	121200	128300						
	J_1	kgm ²	0,0062	0,0110	0,0195	0,0345	0,0614	0,1082	0,1858	0,3334	0,5908	1,0328	1,8394						
5.6	Fr_1	N	5600	7100	10000	14800	16100	25400	33900	39900	51200	58900	69400						
	Fr_2	N	13000	20000	26700	32300	38100	42900	61300	74800	101100	130300	142900						
	J_1	kgm ²	0,0054	0,0096	0,0170	0,0300	0,0536	0,0944	0,1621	0,2906	0,5151	0,9005	1,6037						
PB	6.3	Fr_1	N	4400	5600	6800	9100	9900	11500	18500	20600	29300	34400	43100	53800	61200	63900	67000	71100
		Fr_2	N	10100	15700	22800	23300	28400	36900	48700	59800	82200	108200	123400	128200	142200	154600	163300	183300
		J_1	kgm ²	0,0118	0,0211	0,0376	0,0665	0,1187	0,2135	0,3738	0,6661	1,1922	2,1014	3,7540	6,7507	11,819	21,063	37,693	66,430
	7.1	Fr_1	N	4500	5800	7000	9300	10300	12000	18800	21500	30200	35500	44600	55500	63100	65900	69100	73200
		Fr_2	N	12700	19700	22800	29200	32800	43000	57100	67500	97100	128400	147700	153400	170100	185000	195400	219300
		J_1	kgm ²	0,0103	0,0184	0,0330	0,0582	0,1040	0,1870	0,3274	0,5836	1,0444	1,8407	3,2884	5,9133	10,353	18,450	33,018	58,190
	8	Fr_1	N	4600	6000	7100	9500	10700	12500	19200	22300	31200	36600	46100	57100	65000	67900	71100	75400
		Fr_2	N	12700	19700	22500	29200	31000	40200	52900	65300	90900	120700	140000	145000	160800	174900	184700	207300
		J_1	kgm ²	0,0091	0,0161	0,0289	0,0510	0,0911	0,1638	0,2868	0,5111	0,9149	1,6125	2,8805	5,1799	9,0692	16,162	28,923	50,973
	9	Fr_1	N	4700	6200	7300	9700	11100	13000	19500	23200	32100	37700	47300	58800	66900	69800	73200	77600
		Fr_2	N	12100	19200	22500	28200	30400	37400	47700	58200	84800	114400	130700	135100	149800	162900	172000	193200
		J_1	kgm ²	0,0079	0,0140	0,0250	0,0443	0,0791	0,1421	0,2488	0,4435	0,7936	1,3989	2,4990	4,4940	7,8682	14,022	25,092	44,223
	10	Fr_1	N	4800	6300	7200	9900	11500	13500	19900	24100	33100	38800	49100	60500	68800	71800	75300	79800
		Fr_2	N	12100	19200	22500	28200	30400	36600	45900	56700	84800	114400	123500	128100	136500	148500	156800	176000
		J_1	kgm ²	0,0068	0,0120	0,0214	0,0379	0,0677	0,1216	0,2129	0,3794	0,6790	1,1967	2,1378	3,8443	6,7307	11,995	21,465	37,830
	11.2	Fr_1	N	4900	6581	7700	10100	11900	14000	20200	24900	34100	39900	50600	62100	70600	73800	77300	82000
		Fr_2	N	12100	19200	21900	28200	30400	36600	45900	56700	84800	114400	123500	125100	127100	138200	145900	163800
J_1		kgm ²	0,0058	0,0102	0,0182	0,0322	0,0577	0,1035	0,1812	0,3229	0,5779	1,0186	1,8196	3,2720	5,7288	10,209	18,270	32,198	
12.5	Fr_1	N	4200	5900	7200	8000	9800	11800	16200	20600	28800	36400	44200	49000	53200	61500	61700	70900	
	Fr_2	N	11500	18500	21900	27200	29800	35700	44700	54600	83500	110000	120000	121200	123300	134000	141600	159000	
	J_1	kgm ²	0,0048	0,0085	0,0152	0,0269	0,0480	0,0864	0,1512										

HELICAL GEAR UNITS

Overhung loads Fr_1, Fr_2 - Mass Moment of Inertia J_1

PC
PD

			Size															
i_N			10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
22.5	Fr_1	N	2000	2700		6100	8300											81500
	Fr_2	N	13000	18200		42200	52800											382500
	J_1	kgm ²	0,0007	0,0017		0,0055	0,0103											3,0326
25	Fr_1	N	2000	2700	5400	6100	8300	9700	12600	15200	17500	27500		40800	47200	58300	81600	103600
	Fr_2	N	13000	18200	23600	42200	52800	57800	70500	85500	93500	166600		229000	270000	299000	382500	499400
	J_1	kgm ²	0,0007	0,0016	0,0026	0,0053	0,0097	0,0156	0,0263	0,0477	0,0910	0,1527		0,4993	0,9019	1,6085	2,8761	5,0752
28	Fr_1	N	2100	2800	5500	6200	8400	9800	12600	15300	17600	27700	33700	40800	47300	58400	81800	103800
	Fr_2	N	13000	18200	23600	42200	52800	57800	70500	85600	93500	166600	206800	229000	270000	299000	382500	499400
	J_1	kgm ²	0,0007	0,0015	0,0025	0,0050	0,0086	0,0150	0,0257	0,0473	0,0860	0,1517	0,2704	0,4815	0,8463	1,5094	2,6989	4,7624
31.5	Fr_1	N	2100	2800	5500	6200	8400	9800	12600	15400	17800	27900	33800	40900	47400	58500	81900	104000
	Fr_2	N	13000	18200	23600	42200	52800	57800	70500	85600	93500	166600	206800	229000	270000	299000	382500	499400
	J_1	kgm ²	0,0007	0,0014	0,0024	0,0046	0,0081	0,0142	0,0245	0,0447	0,0809	0,1428	0,2547	0,4534	0,7970	1,4213	2,5415	4,4847
35.5	Fr_1	N	2100	2800	5500	6200	8400	9900	12700	15400	17900	28000	33900	41000	47500	58600	82000	104100
	Fr_2	N	12400	17700	22500	40000	50600	55600	67200	82200	88100	161100	200200	223600	259200	294600	371800	488500
	J_1	kgm ²	0,0007	0,0013	0,0024	0,0043	0,0076	0,0134	0,0237	0,0422	0,0761	0,1345	0,2399	0,4269	0,7505	1,3384	2,2933	4,2231
40	Fr_1	N	2100	2800	5500	6200	8400	9900	12700	15500	17900	28000	34000	41000	47600	58700	82100	104300
	Fr_2	N	12400	17700	22500	40000	50600	55600	67200	82200	88100	161100	200200	223600	259200	294600	371800	488500
	J_1	kgm ²	0,0007	0,0012	0,0023	0,0040	0,0071	0,0127	0,0223	0,0399	0,0716	0,1266	0,2260	0,4020	0,7067	1,2604	2,2536	3,9768
45	Fr_1	N	2200	2900	5600	6300	8500	9900	12700	15500	18000	28100	34100	41200	47700	58900	82400	104600
	Fr_2	N	12400	17700	22500	40000	50600	55600	67200	82200	88100	161100	200200	223600	259200	294600	371800	488500
	J_1	kgm ²	0,0006	0,0012	0,0022	0,0038	0,0068	0,0119	0,0210	0,0377	0,0674	0,1192	0,2129	0,3786	0,6655	1,1869	2,1223	3,7451
50	Fr_1	N	2200	2900	5600	6300	8500	10000	12800	15600	18000	28200	34200	41300	47800	59000	82500	104800
	Fr_2	N	11900	17100	21300	37700	48400	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700
	J_1	kgm ²	0,0006	0,0011	0,0020	0,0036	0,0063	0,0113	0,0198	0,0354	0,0635	0,1123	0,2005	0,3566	0,6267	1,1176	1,9984	3,5264
56	Fr_1	N	2200	2900	5600	6300	8500	10000	12800	15600	18100	28300	34300	41400	47900	59100	82600	104900
	Fr_2	N	11900	17100	21300	37700	48400	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700
	J_1	kgm ²	0,0005	0,0010	0,0019	0,0034	0,0059	0,0106	0,0187	0,0334	0,0597	0,1056	0,1885	0,3353	0,5894	1,0512	1,8796	3,3167
63	Fr_1	N	2200	2900	5600	6300	8500	10000	12800	15700	18200	28400	34400	41500	48000	59100	82800	105100
	Fr_2	N	11900	17100	21300	37700	48400	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700
	J_1	kgm ²	0,0005	0,0010	0,0018	0,0032	0,0056	0,0101	0,0177	0,0315	0,0564	0,0998	0,1783	0,3170	0,5570	0,9933	1,7761	3,1341
71	Fr_1	N	2300	3000	5600	6300	8600	10100	12900	15700	18200	28500	34500	41600	48200	59300	83000	105400
	Fr_2	N	11900	17100	21300	37700	48400	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700
	J_1	kgm ²	0,0005	0,0009	0,0017	0,0030	0,0054	0,0095	0,0166	0,0298	0,0533	0,0943	0,1684	0,2995	0,5265	0,9389	1,6789	2,9626
80	Fr_1	N	2300	3000	5600	6300	8600	10100	12900	15800	18300	28600	34500	41700	48300	59400	83200	105600
	Fr_2	N	11900	17100	21300	37700	48400	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700
	J_1	kgm ²	0,0004	0,0009	0,0016	0,0029	0,0051	0,0091	0,0160	0,0285	0,0511	0,0904	0,1613	0,2869	0,5043	0,8993	1,6081	2,8376
90	Fr_1	N	2300	3000	5600	6300	8600	10200	13000	15800	18400	28700	34600	41800	48400	59500	83300	105700
	Fr_2	N	11900	17100	21300	37700	48400	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700
	J_1	kgm ²	0,0004	0,0008	0,0016	0,0027	0,0049	0,0087	0,0153	0,0275	0,0492	0,0871	0,1555	0,2766	0,4861	0,8670	1,5503	2,7356
100	Fr_1	N	2300	3000	5600	6300	10200	13000	15900	18400	28700	34700	41900	48500	59400	83400	105900	
	Fr_2	N	11900	17100	21300	37700	53400	64900	79900	85000	157700	195800	218100	253800	291400	371800	477700	
	J_1	kgm ²	0,0004	0,0008	0,0015	0,0027	0,0085	0,0150	0,0267	0,0478	0,0847	0,1512	0,2689	0,4725	0,8426	1,5067	2,6587	
100	Fr_1	N					8800											
	Fr_2	N					62700											
	J_1	kgm ²					0,0028											
112	Fr_1	N	1900	3200	5700	6400	8800	9800	12400	15600	17500	23800	28400	31600	43600	56400	73700	92200
	Fr_2	N	18600	27500	39800	48300	62700	76700	94400	108500	164000	197900	224500	243900	266700	323300	370100	390800
	J_1	kgm ²	0,0003	0,0005	0,0009	0,0016	0,0028	0,0049	0,0086	0,0152	0,0258	0,0488	0,0862	0,1566	0,2699	0,4856	0,8777	1,5630
115	Fr_1	N	1900	3200	5700	6400	8800	9800	12400	15600	17500	23800	28400	31600	43600	56400	73700	92200
	Fr_2	N	18600	27500	39800	48300	62700	76700	94400	108500	164000	197900	224500	243900	266700	323300	370100	390800
	J_1	kgm ²	0,0003	0,0005	0,0009	0,0016	0,0028	0,0049	0,0086	0,0152	0,0258	0,0488	0,0862	0,1566	0,2699	0,4856	0,8777	1,5630
140	Fr_1	N	1900	3200	5700	6400	8800	9800	12400	15600	17500	23800	28400	31600	43600	56400	73700	92200
	Fr_2	N	18600	27500	39800	48300	62700	76700	94400	108500	164000	197900	224500	243900	266700	323300	370100	390800
	J_1	kgm ²	0,0003	0,0005	0,0009	0,0016	0,0028	0,0049	0,0086	0,0152	0,0258	0,0488	0,0862	0,1566	0,2699	0,4856	0,8777	1,5630
160	Fr_1	N	1900	3200	5700	6400	8800	9800	12400	15600	17500	23800	28400	31600	43600	56400	73700	92200
	Fr_2	N	18600	27500	39800	48300	62700	76700	94400	108500	164000	197900	224500	243900	266700	323300	370100	390800
	J_1	kgm ²	0,0003	0,0005	0,0009	0,0016	0,0028	0,0049	0,0086	0,0152	0,0258	0,0488	0,0862	0,1566	0,2699	0,4856	0,8777	1,5630
180	Fr_1	N	2000	3300	5800	6500	8900	10000	12500	15800	17700	24200	28800	32000	44200			

BEVEL-HELICAL UNITS

Overhung loads Fr_1, Fr_2 - Mass Moment of Inertia J_1

iN	Size	Size															
		10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
5	Fr_1	N	4100	5300	7800	9200	11500	12400	14300	22400	33100	42500	52000				
	Fr_2	N	14200	18600	24800	30600	37000	44700	60800	77800	102700	131000	144000				
	J_1	kgm ²	0,0036	0,0062	0,0111	0,0199	0,0357	0,0634	0,1097	0,1990	0,3663	0,6611	1,1745				
5.6	Fr_1	N	4300	5500	8200	9700	12100	13000	15000	23600	34900	44800	54800				
	Fr_2	N	13300	17400	23500	29200	35300	42700	58200	74700	100300	128400	141000				
	J_1	kgm ²	0,0035	0,0059	0,0106	0,0188	0,0339	0,0602	0,1042	0,1890	0,3480	0,6279	1,1154				
6.3	Fr_1	N	4500	5800	8600	10200	12800	13700	15800	24800	36600	47000	57500				
	Fr_2	N	12500	16800	22800	28200	33000	40200	56600	72600	97300	124700	137000				
	J_1	kgm ²	0,0033	0,0056	0,0100	0,0179	0,0322	0,0572	0,0990	0,1795	0,3305	0,5962	1,0592				
7.1	Fr_1	N	4800	6100	9000	10700	13400	14300	16500	26000	38400	49300	60200				
	Fr_2	N	14100	18500	25700	31800	36600	48100	65400	83900	93200	142000	156100				
	J_1	kgm ²	0,0031	0,0054	0,0096	0,0173	0,0311	0,0553	0,0956	0,1733	0,3192	0,5662	1,0059				
8	Fr_1	N	5000	6400	9400	11200	14000	15000	17300	27100	40100	51500	63000				
	Fr_2	N	10900	14200	32500	26500	34600	42200	60000	73300	107800	126800	139300				
	J_1	kgm ²	0,0030	0,0051	0,0092	0,0163	0,0294	0,0522	0,0903	0,1638	0,3015	0,5467	0,9713				
9	Fr_1	N	5200	6700	9900	11700	14600	15600	18100	28300	41900	53800	65700				
	Fr_2	N	11100	14500	21600	22300	33200	40100	58100	71400	95400	131400	144300				
	J_1	kgm ²	0,0029	0,0049	0,0087	0,0155	0,0278	0,0495	0,0856	0,1552	0,2859	0,5167	0,9179				
10	Fr_1	N	5400	6900	10300	12200	15200	16300	18800	29500	43600	56000	68500				
	Fr_2	N	11300	13200	20800	25100	30000	38800	56600	69900	86400	124900	137300				
	J_1	kgm ²	0,0027	0,0046	0,0083	0,0148	0,0266	0,0473	0,0819	0,1486	0,2735	0,4897	0,8700				
11.2	Fr_1	N	5600	7200	10700	12700	15800	16900	19600	30700	45300	58200	71200				
	Fr_2	N	13000	15400	21900	28100	30900	34900	56400	69100	86100	123600	135800				
	J_1	kgm ²	0,0026	0,0045	0,0080	0,0143	0,0258	0,0459	0,0793	0,1438	0,2648	0,4686	0,8325				
12.5	Fr_1	N	5400	6600	9900	11800	14900	16100	17400	27900	41900	55400	67200				
	Fr_2	N	16400	21400	31000	38200	44800	48400	69900	86200	84600	155300	170600				
	J_1	kgm ²	0,0025	0,0042	0,0076	0,0135	0,0243	0,0431	0,0746	0,1352	0,2490	0,4536	0,8059				
14	Fr_1	N	5600	6800	10200	12300	15500	16700	18100	28900	43400	56400	69700				
	Fr_2	N	17900	23500	32900	40400	46000	53400	75500	96300	119300	166400	182800				
	J_1	kgm ²	0,0023	0,0041	0,0074	0,0132	0,0237	0,0422	0,0730	0,1324	0,2438	0,4266	0,7578				
16	Fr_1	N	6200	7500	11300	13600	17100	18500	20000	32000	48100	62500	77200				
	Fr_2	N	16200	21400	28900	37300	44800	49300	65600	84400	126500	161000	176900				
	J_1	kgm ²	0,0023	0,0039	0,0071	0,0127	0,0228	0,0407	0,0704	0,1276	0,2350	0,4176	0,7419				
18	Fr_1	N	6300	7700	11500	13800	17400	18800	20300	32500	48800	63500	78400				
	Fr_2	N	15600	20600	30300	36300	43500	45600	67700	82900	124300	163600	179700				
	J_1	kgm ²	0,0022	0,0038	0,0070	0,0124	0,0214	0,0397	0,0688	0,1248	0,2298	0,4026	0,7152				
20	Fr_1	N	2000	3600	6900	7400	9900	11700	14600	17100	19600	28800	33200	37600	42600	48200	
	Fr_2	N	11300	13700	21200	27500	29900	35700	43100	54000	79500	114400	129600	147000	171800	199900	
	J_1	kgm ²	0,0025	0,0044	0,0073	0,0131	0,0238	0,0426	0,0744	0,1326	0,2375	0,4187	0,7474	1,3437	2,3522	4,1911	
22.5	Fr_1	N	2000	3600	6900	7400	9900	11800	14700	17200	19900	29000	33400	37800	42800	48500	
	Fr_2	N	11300	13700	21200	27500	29900	35700	43100	54000	79500	114400	129600	147000	171800	199900	
	J_1	kgm ²	0,0024	0,0040	0,0069	0,0123	0,0222	0,0397	0,0694	0,1238	0,2216	0,3907	0,6976	1,2542	2,1956	3,9119	
25	Fr_1	N	2000	3600	6900	7400	10000	11900	14800	17400	20100	29200	33600	38000	43100	48800	
	Fr_2	N	10100	12200	20300	26000	28200	33700	40600	50900	75000	108000	122300	138700	162100	188600	
	J_1	kgm ²	0,0021	0,0037	0,0064	0,0116	0,0207	0,0371	0,0648	0,1155	0,2068	0,3646	0,6511	1,1705	2,0491	3,6511	
28	Fr_1	N	2200	3700	7000	7500	10000	12100	14900	17600	20300	29400	33800	38200	43300	49000	
	Fr_2	N	10100	12200	20300	26000	28200	33700	40600	50900	75000	108000	122300	138700	162100	188600	
	J_1	kgm ²	0,0019	0,0034	0,0061	0,0108	0,0193	0,0346	0,0605	0,1078	0,1930	0,3402	0,6077	1,0926	1,9127	3,4079	
31.5	Fr_1	N	2200	3700	7000	7500	10100	12200	15000	17800	20400	29700	34100	38500	43500	49300	
	Fr_2	N	10100	12200	20300	26000	28200	33600	40600	50900	75000	108000	122300	138700	162100	188600	
	J_1	kgm ²	0,0018	0,0032	0,0057	0,0101	0,0179	0,0323	0,0565	0,1006	0,1801	0,3175	0,5671	1,0198	1,7853	3,1809	
35.5	Fr_1	N	2200	3700	7000	7500	10100	12300	15100	17900	20600	29700	34300	38700	43800	49600	
	Fr_2	N	9500	11700	19800	24500	26600	31800	38400	48100	70900	102000	115500	131000	153100	178100	
	J_1	kgm ²	0,0017	0,0030	0,0053	0,0094	0,0167	0,0301	0,0530	0,0939	0,1681	0,2963	0,5293	0,9518	1,6662	2,9688	
40	Fr_1	N	2200	3700	7000	7500	10200	12400	15200	18100	20900	30100	34500	38900	44000	49900	
	Fr_2	N	9500	11700	19800	24500	26600	31800	38400	48100	70900	102000	115500	131000	153100	178100	
	J_1	kgm ²	0,0016	0,0028	0,0049	0,0088	0,0156	0,0281	0,0492	0,0877	0,1569	0,2766	0,4941	0,8884	1,5551	2,7709	
45	Fr_1	N	2300	3800	7100	7700	10200	12500	15400	18200	21100	30300	34700	39100	44300	50200	
	Fr_2	N	9500	11700	19800	24500	26600	31800	38400	48100	70900	102000	115500	131000	153100	178100	
	J_1	kgm ²	0,0015	0,0026	0,0047	0,0081	0,0146	0,0262	0,0460	0,0818	0,1465	0,2581	0,4611	0,8292	1,4515	2,5862	
50	Fr_1	N	1900	3100	5800	6400	8400	10300	12600	15200	17600	25300	28600	32200	36400	41300	
	Fr_2	N	7900	11300	19200	23600	25600	30700	37000	46300	68300	98300	111300	126300	147600	171700	
	J_1	kgm ²	0,0014	0,0025	0,0043	0,0076	0,0136	0,0244	0,0428	0,0763	0,1365	0,2406	0,4298	0,7729	1,3530	2,4108	
56	Fr_1	N	1900	3100	5800	6400	8400	10400	12700	15300	17800	25500	28800	32400	36600	41500	
	Fr_2	N	7900	11300	19200	23600	25600	30700	37000	46300	68300	98300	111300	126300	147600	171700	
	J_1	kgm ²	0,0012	0,0023	0,0040	0,0071	0,0126	0,0227	0,0397	0,0707	0,1266	0,2231	0,3986	0,7167	1,2547	2,2355	
63	Fr_1	N	1900	3100	5800	6400	8500	10500	12800	15500	18000	25700	28900	32500	36800	41700	
	Fr_2	N	7900	11300	19200	23600	25600	30700	37000	46300	68300	98300	111300	126300	147600	171500	
	J_1	kgm ²	0,0011	0,0021	0,0037	0,0065	0,0116	0,0209	0,0366	0,0652	0,1167	0,2056	0,3673	0,6605	1,1562	2,0601	
71	Fr_1	N	2000	3200	5900	6400	8500	10600	12900	15600	18200	25900	29100	32700	37000	42000	
	Fr_2	N	7400	10800	18500	22600	24600	29400	35400	44400	65400	94100	106600	120900	141300	164400	
	J_1	kgm ²	0,0011	0,0019	0,0033	0,0060	0,0106	0,0191	0,0334	0,0596	0,1067	0,1881	0,3360	0,6043	1,0579	1,8849	

WEIGHTS (kg)

Helical units

	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
PA	72	120	164	237	324	450	616	915	1250	1490						
PB	81	138	166	250	390	540	753	955	1465	2040	2810	3750				
PC	96	165	228	309	438	591	814	1190	1520	1810	3280	4450	6100	8900		
PD	116	177	241	327	461	636	865	1298	1620	2400	3410	4690	6550	9650		

Bevel-helical units

	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
RB	91	126	176	248	362	494	688	910	1320	1870						
RC	106	126	206	294	360	569	785	1110	1510	2180	3080	4210				
RD	110	159	225	312	436	618	873	1205	1626	2315	3350	4490	6350	8900		

LUBRICANT QUANTITIES (liters)

If not stated otherwise, all units are despatched without oil (a warning label is attached). The approximate quantity of oil required for horizontal mounting is given in the Table below. For mounting positions different from pos.1 (page 33) unit should be filled to the level marked on the level plug or on the dipstick. Do not overfill the unit as this can cause leakage and overheating.

Helical units

	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
PA	2,8	3,9	5,4	7,3	9,8	13,8	19	26	37	52	72					
PB	3,6	5	6,5	10	13	18	28	35	49	69	96	135	189	235	289	343
PC	4,5	6,3	8,1	13	17	26	36	52	73	102	145	208	297	407	537	692
PD	4,5	6,3	8,1	13	17	26	36	52	73	102	145	208	297	407	537	692

Bevel-helical units

	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
RB	3,4	4,7	6,5	8,8	12	16,5	22,8	31	44,4	62	86,5					
RC	4,7	6,5	9	13	18	25	35	49	69	96	135	189	243	303		
RD	5,5	7,7	10,1	16,2	21	32,5	45	65	91	127	178	255	365	500	660	851

LUBRICATION

ISO & AGMA Viscosity grade

Speed n_2 (min^{-1})	Standard	Ambient temperature range ($^{\circ}\text{C}$)		
		from -10 to -15	from 0 to +30	from +10 to +50
Under 100	ISO - AGMA	VG 68 2 EP	VG 150 4 EP	VG 220 5 EP
Over 100	ISO - AGMA	VG 100 3 EP	VG 220 5 EP	VG 320 6 EP

Recommended Mineral Lubricants

ISO viscosity at 40°Celsius (cSt)	BP Energol	ESSO Spartan	MOBIL Mobilgear	SHELL Omala	TEXACO Meropa	TOTAL Carter	AGIP Blasia
VG 320	GR-XP 320	EP 320	632	320	320	EP 320	320
VG 220	GR-XP 220	EP 220	630	220	220	EP 220	220
VG 150	GR-XP 150	EP 150	629	150	150	EP 150	150
VG 100	GR-XP 100	EP 100	627	100	100	EP 100	100
VG 68	GR-XP 68	EP 68	626	68	68	EP 68	68

Recommended Synthetic Lubricants

ISO viscosity at 40°Celsius (cSt)	BP Energol	CASTROL Tribol	MOBIL SHC	KLUEBER EG4
VG 320	EPX 320	1510/320	632	320
VG 220	EPX 220	1510/220	630	220
VG 150	HTX 150	1510/150	629	150
VG 68			626	

Mineral oil : max running temperature 90°Celsius

Synthetic oil: max running temperature 100°Celsius (110°Celsius for short running).

Do not mix up different brands.

Oil change interval (h)

TYPE	Oil temperature		
	65°C	80°C	90°C
Mineral	8000	4000	2000
Synthetic	20000	15000	10000